DANIELS TOWN SQUARE CPA

Large-scale Comprehensive Plan Amendment - Text Amendment -



August 26, 2024

PREPARED FOR: Bison Property Holdings, LLC

SUBMITTED TO:

Lee County, Community Development Development Services Department 1500 Monroe Street Fort Myers, FL 33901



Table of Contents

Contents

EXHIBIT T1 - CPA APPLICATION

EXHIBIT M3 - DISCLOSURES AND AFFIDAVITS

EXHIBIT T3 - PREAPPLICATION MEETING

EXHIBIT T4 - PROPOSED TEXT CHANGES

EXHIBIT T5 - ANALYSIS OF IMPACTS

EXHIBIT T6 - LEE PLAN ANALYSIS

EXHIBIT T7 - TRAFFIC CIRCULATION ANALYSIS

EXHIBIT T8 - HISTORIC RESOURCES IMPACT ANALYSIS

EXHIBIT T9 AND 10 - STATE AND REGIONAL POLICY ANALYSIS



EXHIBIT T1 - CPA APPLICATION



APPLICATION FOR A COMPREHENSIVE PLAN AMENDMENT - TEXT

Proj	ject Name: <u>Danie</u>	els Town Square	CPA	J. W. & Sel ()	111000	C V birt
Proj	ject Description: Bis	on Property Hol	dings, LLC ("App	licant") seeks to ame	nd the Future	Land Use Category (FLUC)
of 61	1.26+/- acres located	on the southwest	t corner of Daniels	Parkway and I-75 in	unincorpora	ted Lee County, Florida. The
App	licant seeks to amen	d the FLUC fron	n General Interch	ange to Intensive Dev	elopment and	l include the acreage north of
Thre	ee Oaks Extension in	the Mixed-use (Overlay. The desir	ed development prog	ram is for up	to 30,000 square feet of Non-
Resi	dential uses, a 200-i	room Hotel and l	Multifamily Reside	ential of up to 1,234	du. There are	5.79 acres of wetlands to be
<u>imp</u>	acted as approved b	y ERP No. 23022	0-37612.			
Stat	e Review Process:	☐ State Coordin	nated Review	Expedited State	Review	Small-Scale Text*
*Mu	st be directly relate	d to the impleme	ntation of small-so	cale map amendment	as required	by Florida Statutes.
APP	LICANT – PLEASI	E NOTE:		***********	********	
A PI	RE-APPLICATION	MEETING IS R		R TO THE SUBMIT		
	nit 3 copies of the artment of Communit		tion and amendme	ent support documen	tation, includi	ng maps, to the Lee County
Берг	attition of community	y Development.				
						quired to be submitted to staff. and State Reviewing Agencies.
				to obtain the required		ind State Keviewing Agencies.
If vo	u have any questions	rangeding this an	nlication places es	ntact the Planning Sec	tion at (220)5	22 9595
1,000					tion at (239)3	33-6363.
1.	Name of Applican Address: 150 E. P.				7in: Boca De	aton, FL 33432
	Phone Number: (5	The state of the s				intresidential.com
			Secretary of the second			
1.	Name of Contact: Address:	Fred Drovdlic, 1514 Broadway,		ing and Landscape A	rchitecture Zip: Fort Mye	ET 20001
	Phone Number:	239-318-6707	Suite 201		rovdlic@rvipla	
•	Day of Technic	diam Dennis		10.1.77		Contraction
2.						County that may be elopment FLUC are similar in
			property of the second			eater potential intensity. The
				tting the subject prope and compatible with C		and south with greater
40	The State of the S		DESCRIPTION OF THE PROPERTY OF			lange.
4a.				owing areas? Not Ap alysis of the change to		
6		of the following a	reas, provide an an	arysis of the change it	ine affected a	iica.
	Public Acquisition [Map 1-D]					
	Agricultural Overlay	, \Box	Southeast Lee Co Overlay [Map 2-1		Urban	Reserve [Map 1-D]
ш	[Map 1-G]	П	Mixed Use Overl	7.	_	-Dependent Overlay
	Airport Mitigation I	ands \Box	[Map 1-C]		[Map	I-HJ
	[Map 1-D]		Community Plan	ning Areas		e Recreational Facilities ay [Map 1-F]
Ш	Airport Noise Zones [Map 1-E]		[Map 2-A]		Overte	i Iwah 1-1 l

4b. Planning Communities/Comm	nunity Plan Area Requireme	nts	
If located in one of the followir required public informational se		nunity plan areas, provide a me	eeting summary document of the
■ N/A	Bayshore [Goal 18]	Boca Grande [Goal 19]	Buckingham [Goal 20]
Caloosahatchee Shores [Goal 21]	Olga [Goal 22]	Captiva [Goal 23]	Greater Pine Island [Goal 24]
Lehigh Acres [Goal 25]	North Captiva [Goal 26]	NE Lee County [Goal 27]	Alva [Goal 28]
North Olga [Goal 29]	North Fort Myers [Goal 3	5 (프로그램 124) 네티스를 다려왔다고 있다고 남	San Carlos Island [Goal 32]
Southeast Lee County [Goal 33]	Tice [Goal 34]		Transcription of the second
Public Facilities Impacts			
NOTE: The applicant must calculate pu Facilities Analysis) 1. Traffic Circulation Analysis: Provide Plan/Map 3-A (20-year horizon) and Circulation Analysis)	de an analysis of the effect of t	he change on the Financially Fo	easible Transportation
Provide an existing and future cor Plan Analysis) a. Sanitary Sewer b. Potable Water c. Surface Water/Drainage Basins d. Parks, Recreation, and Open Space. Public Schools		owing (see Policy 95.1.3): (S	See Exhibit M11-Lee
Environmental Impacts			
Provide an overall analysis of potential	environmental impacts (positi	ve and negative), (See Exhibit	M12-Environmental Impacts
Analysis)			

Historic Resources Impacts

Provide an overall analysis of potential historic impacts (positive and negative). (See Exhibit M13-Historic Resources Impact Analysis)

Internal Consistency with the Lee Plan

- 1. Discuss how the proposal affects established Lee County population projections, Lee Plan Table 1(b) and the total population capacity of the Lee Plan Future Land Use Map.
- 2. List all goals and objectives of the Lee Plan that are affected by the proposed amendment. This analysis should include an evaluation of all relevant policies under each goal and objective.
- 3. Describe how the proposal affects adjacent local governments and their comprehensive plans.
- 4. List State Policy Plan goals and policies, and Strategic Regional Policy Plan goals, strategies, actions and policies which are relevant to this plan amendment.

Justify the proposed amendment based upon sound planning principles

Support all conclusions made in this justification with adequate data and analysis.

SUBMITTAL REQUIREMENTS

Clearly label all submittal documents with the <u>exhibit name</u> indicated below.

MINIMUM SUBMITTAL ITEMS

\boxtimes	Completed application (Exhibit – T1)
Ø	Filing Fee (Exhibit – T2)
8	Pre-Application Meeting (Exhibit – T3)
8	Proposed text changes (in strike through and underline format) (Exhibit - T4)
8	Analysis of impacts from proposed changes (Exhibit – T5)
\boxtimes	Lee Plan Analysis (Exhibit – T6/M11)
\boxtimes	Traffic Circulation Analysis (Exhibit – T7/M15)
8	Historic Resources Impacts Analysis (Exhibit – T8/M13)
☒	State Policy Plan Analysis (Exhibit – T9/M18)
Ø	Strategic Regional Policy Plan Analysis (Exhibit - T10/M18)

Lee County Comprehensive Plan Text Amendment Application Form (11/2021)

Page 2 of 2



EXHIBIT M3 – DISCLOSURES AND AFFIDAVITS

AFFIDAVIT OF AUTHORIZATION

APPLICATION IS SIGNED BY INDIVIDUAL OWNER, APPLICANT, CORPORATION, LIMITED LIABILITY COMPANY (L.L.C.), LIMITED COMPANY (L.C.), PARTNERSHIP, LIMITED PARTNERSHIP, OR TRUSTEE

I, <u>Jim Lott</u> (name), as <u>Authorized Signatory</u> (owner/title) of <u>Bison Property Holdings</u>, <u>LLC</u> (company/property), swear or affirm under oath, that I am the authorized representative of the owner(s) of the property and authorize the Meyers Group as the applicant and that:

- I have full authority to secure the approval(s) requested and to impose covenants and restrictions on the referenced property as a result of any action approved by the County in accordance with this application and the Land Development Code;
- All answers to the questions in this application and any sketches, data or other supplementary matter attached hereto and made a part of this application are honest and true;
- I have authorized the staff of Lee County Community Development to enter upon the property during normal working hours for the purpose of investigating and evaluating the request made thru this application; and that
- The property will not be transferred, conveyed, sold or subdivided unencumbered by the conditions and restrictions imposed by the approved action.

*Notes:

- If the applicant is a corporation, then it is usually executed by the corp. pres. or v. pres.
- If the applicant is a Limited Liability Company (L.L.C.) or Limited Company (L.C.)., then the documents should typically be signed by the Company's "Managing Member."
- If the applicant is a partnership, then typically a partner can sign on behalf of the partnership.
- If the applicant is a limited partnership, then the general partner must sign and be identified as the "general partner" of the named partnership.
- If the applicant is a trustee, then they must include their title of "trustee."

Cherokee County Cation (1/1/2025) mission Expires June 29, 2024

 In each instance, first determine the applicant's status, e.g., individual, corporate, trust, partnership, estate, etc., and then use the appropriate format for that ownership.

- 1 NAH	2/22/24
Authorized Signatory	Date
*************NOTE: NOTARY PUBLIC IS NOT REQUIRED FOR ADM ALL OTHER APPLICATION TYPES MUST	
STATE OF GEORGIA	
OUNTY OF CHEROKEE	
The foregoing instrument was sworn to (or affirmed) and subscribed by presence or ☐ online notarization, this <u>22</u> day of <u>February</u> (name of person provi	
personally known to me or who has produced	(type of identification)
is identification.	A dla its
31	wa Tarelton
STAMP/SEAL SHELL SHELL A HAMILTON Signatu	are of Notary Public

Page 1

DISCLOSURE OF INTEREST AFFIDAVIT

BEFORE ME this day appeared <u>Jim Lott as Authorized Signatory of Bison</u> <u>Property Holdings, LLC</u>, who, being first duly sworn and deposed says:

- 1. That I am the record owner, or a legal representative of the record owner, of the property that is located at <u>STRAPS 22-45-25-L3-U2053.3576, 22-45-25-L4-U2037.3579, 22-45-25-L3-U2060.3612 and 22-45-25-L4-U2038.3602</u> and is the subject of an Application for zoning action (hereinafter the "Property").
- 2. That I am familiar with the legal ownership of the Property and have full knowledge of the names of all individuals that have an ownership interest in the Property or a legal entity owning an interest in the Property.

[OPTIONAL PROVISION IF APPLICANT IS CONTRACT PURCHASER: In addition, I am familiar with the individuals that have an ownership interest in the legal entity that is under contract to purchase the Property.]

- 3. That, unless otherwise specified in paragraph 6 below, no Lee County Employee, County Commissioner, or Hearing Examiner has an Ownership Interest in the Property or any legal entity (Corporation, Company, Partnership, Limited Partnership, Trust, etc.) that has an Ownership Interest in the Property or that has contracted to purchase the Property.
- 4. That the disclosure identified herein does not include any beneficial Ownership Interest that a Lee County Employee, County Commissioner, or Hearing Examiner may have in any entity registered with the Federal Securities Exchange Commission or registered pursuant to Chapter 517, whose interest is for sale to the general public.
- 5. That, if the Ownership Interest in the Property changes and results in this affidavit no longer being accurate, the undersigned will file a supplemental Affidavit that identifies the name of any Lee County Employee, County Commissioner, or Hearing Examiner that subsequently acquires an interest in the Property.
- Disclosure of Interest held by a Lee County Employee, County Commissioner, or Hearing Examiner.

Name a	and Address	Percentage of Ownership

Under penalty of perjury, I declare that I have read the foregoing and the facts alleged are true to the best of my knowledge and belief. Authorized Signatory Jim Lott **Print Name** ********NOTE: NOTARY PUBLIC IS NOT REQUIRED FOR ADMINISTRATIVE APPROVALS******** ALL OTHER APPLICATION TYPES MUST BE NOTARIZED STATE OF GEORGIA COUNTY OF CHEROKEE The foregoing instrument was sworn to (or affirmed) and subscribed before me by means of A physical presence or online notarization, on Februar 22, 2024 (date Had mil yd (name of person providing oath or affirmation), who is personally known to me or who has produced (type of identification) as identification. STAMP/SEAL Signature of Notary Public SHEILA HAMILTON Notary Public, Georgia Cherokee County My Commission Expires June 29, 2024



EXHIBIT T3 – PREAPPLICATION MEETING



DANIELS TOWN SQUARE CPA

Pre-application Meeting

I. REQUEST

The contract purchaser for the 72.3+/- acre subject property, Meyers Group, LLC ("Applicant"), is requesting a Comprehensive Plan Amendment for three changes to Lee County's Comprehensive Plan:

- Amend Map 1-A Future Land Use from General Interchange to the Intensive Development Future Land Use Category (FLUC) and
- 2. Amend Map 1-B Mixed-use Overlay to add the property to the Mixed-use Overlay (MUO).
- A Text Amendment to Lee Plan Table 1(b) to add the residential property acreage to Intensive Development and remove acreage from General Interchange.

II. MEETING OVERVIEW

A meeting was held in-person at 1500 Monroe Street, first floor conference room 1B on April 11, 2022, at 10AM to 11AM. The discussion was to gain understanding about timing of access to the future roadways for future development and the steps to making that happen including zoning for a mixed-use development of multi-family and retail commercial.

The team on behalf of the applicant attending was:

- Fred Drovdlic (planner)
- Alexis Crespo (planner)
- Russell Schropp (attorney)
- Brown Collins (environmental)
- James Ink (engineering)
- Gary Tasman and Shawn Stoneburner (brokers)
- Christopher Moore (Myers Group Contract Purchaser and Developer)
- Ted Treesch (traffic)

The staff in attendance was:

- Cerchie, Randy
- Price, Robert
- Miller, Vincent;
- Dunn, Brandon
- Sweigert, Rebecca
- DeFilippo, Nicholas
- Danley Jr, Dirk
- Rodriguez, Anthony
- Workman, Elizabeth
- Adams, Joseph
- Jacob, Michael

The applicants internal agenda is attached as an exhibit.



Daniels Town Square MPD PRE-APPLICATION MEETING INTERNAL AGENDA April 11, 2022

A. Project Team

- Applicant Meyers Group
- Traffic Ted Treesh
- Planning & Engineering RVi and Atwell
- · Environmental Brown Collins
- Land Use Attorney Russell Schropp
- EDSA Design

B. Property Overview

- 73+/- acres (65.5 acres in original MPD + additional lands)
- Zoned MPD (Z-08-043) for up to 50k Medical, 90k Office, 250k Retail (390k non residential and 120 room hotel)
- Future Land Use: General Interchange
 - o Amend into Intensive Development and Mixed-Use Overlay

C. Request Overview

- Amend the MPD for a mixed use Town Square concept
- Add parcels to original MPD
- CPA to add into Mixed-Use Overlay
- Use TDR program to seek 22 DU/acre
- Improve intersection with Daniels Parkway/Daniels 9300/Danport Blvd

D. Proposed Master Plan

850,000 SF Non-Residential 200 room Hotel 1,590 DU

E. Questions/Discussion Items:

- Impact Fee credits (require separate meeting to negotiate)
- · Access LCDOT and FDOT road construction timelines



EXHIBIT T4 – PROPOSED TEXT CHANGES

YEAR 2045 ALLOCATIONS

			Planning District									
	Future Land Use Category	Unincorporated County	District 1 Northeast Lee County	District 2 Boca Grande	District 3 Bonita	District 4 Fort Myers Shores	District 5 Burnt Store	District 6 Cape Coral	District 7 Captiva	District 8 Fort Myers	District 9 Fort Myers Beach	District 10 Gateway / Airport
	Intensive Development	1,483		-		17	-	21		238	2	
	Central Urban	13,838	*	-	12	207		h 24 U		230		2
	Urban Community	22,739	813	453	- 3	475			5.0		3	15
Ш	Suburban	14,913	-		- 4	1,950	-	2	4.	80	2.0	
. 19	Outlying Suburban	3,648	25	2	- 20	490	13	3	429		2	7
_	Sub-Outlying Suburban	1,731		-	-	330		-	•	- 3	- 20	22
5	Commercial	7		-	- 6		-	- E	÷	7.5	22.0	3
category	Industrial	15	8				2 = - 5				- 34	
3	Public Facilities		1	-		0.5	*	•		7.		1 2
	University Community	503		-		J.				- 4	1.47	3
OSE	Destination Resort Mixed Use Water Dependent	8		-				· · · · · · · · ·		20	- 2	
)	Burnt Store Marina Village	2	14			- X	2			1.0	Fe.	
7	Industrial Interchange		1	-			- 81	- 2			15 - 60	7-
3	General Interchange	114	1-11	-	- ×	-		8	- 1	-	F - 60	
	General Commercial Interchange	4	14.5		1	52	81	- 34	- N	3	1.1	1.0
	Industrial Commercial Interchange	34	0. 14.		12.0	3	- A1			7		-
	University Village Interchange			_	112		- A1	24		2	1	
	New Community	2,104	1,115	4.0	1 - 2	1	A1			12.		9
	Airport	Н.	1	4.			- 81	18		1 6	-	(-
5	Tradeport	3	1611				- 81	14.11	-	1,40		
	Rural	7,764	2,431		-	800	730	- 21				1.0
ייייייייייייייייייייייייייייייייייייי	Rural Community Preserve	3,517	1		- W	-	-6)			3	- 2	1 4
	Coastal Rural	1,338	12.0) TO		- A	12			2	1.4
É	Outer Island	233	2	4	1 1	1	-22		169	124	2.1	
I)	Open Lands	2,186	153			1	257				-	
	Density Reduction/ Groundwater Resource	6,974	131		-	102		9.		1.8		11
ď	Conservation Lands Upland	10	4			-	18	1				
d	Wetlands		- 3-			2-6	1	E-1	- A-75	1.8		1 3
1	Conservation Lands Wetland	- P	1 2	- 2	1 24	i	1					
Jn	incorporated County Total Residential	83,113	4,669	457		4,270	1,002	24	598	548	1.2	1,415
Co	mmercial	8,916	300	53		450	27	9	125	150	7	1,216
Inc	dustrial	4,787	30	3	2	300	10	15	70	315		2,134
	Regulatory Allocations	,,,,,,,	A TOTAL PROPERTY.					1-1	2 22 17			
	blic	120,211	14,191	622		4,864	7,323	6	2,340	583		9,660
_	tive AG	21,944	5,500			240	90		-	-		2
_	ssive AG	13,685	5,500	-		615	100		- 4		1-1-1	485
-	nservation	87,746	2,458	297		1,163	3,186	67	1,595	926	- 4	2,206
-	cant	26,118	1,145	28		733	766	8	103	17	1 4	88
	tal	366,520	33,793	1,460		12,634	12,505	129	4,831	2,538	-	17,205
	ulation Distribution (unincorporated Lee County)		8,235	1,470		35,253	2,179	152	725	5,273	2 - 3	22,281

November 2021 (Ord. No. 02-02, 03-19, 05-19, 07-13, 09-15, 09-16, 10-15, 10-16, 10-40, 10-43, 14-14, 15-10, 16-02, 16-17, 17-12, 17-23, 18-06, 19-13, 19-14, 19-16, 20-05, 21-03, 21-09)
Printed 11/06/2021

YEAR 2045 ALLOCATIONS

		Planning District											
	Future Land Use Category	District 11 Daniels Parkway	District 12 Iona / McGregor	District 13 San Carlos	District 14 Sanibel	District 15 South Fort Myers	District 16 Pine Island	District 17 Lehigh Acres	District 18 Southeast Lee County	District 19 North Fort Myers	District 20 Buckingham	District 21 Estero	District 22 Bashore
	Intensive Development	62 -	k -	100	- B	801	1	30	-	376	- 8	19	1 64
	Central Urban	KLP	656	20	9.1	3,113		7,362	1 - e	2,225	3	197	
	Urban Community		978	1,318	3	863	540	17,034	8	6-x*	115	4	
	Suburban		2,566	2,069	- 1.7	1,202	659	8.	~	6,387		131	- Y.
	Outlying Suburban	1,253	438		9.1	(P	502	9	-	406	-	90	F-18
_	Sub-Outlying Suburban	199	11 12	13	19		- 1	- 31	6 S	145	66	4-	950
Category	Commercial	-	1 - 24	1 3	9.4	1-1		40	100		Θ.	1	9
6	Industrial	2	. 3	THIS F	I UC did	not allow	<i>y</i> -	-	(e)		-	1 2	
ž	Public Facilities	18				I recently		-			7		- F
	University Community	- A	- X					-	(A)	1-7	-	- 3	
Use	Destination Resort Mixed Use Water Dependent		8	400000000000000000000000000000000000000	umber s		3-5	- 3		-	2.5	7	8
2	Burnt Store Marina Village			incons	sistent wi	th the act	tual	2.1	-	-	1,0		-
pu	Industrial Interchange	CYY	1	acrea	ge in Dis	trict 11 in	the -		4.7				
e Land	General Interchange	- 58	1		al Interc		-		8	14		- 2	20
	General Commercial Interchange	(11	7 .							-			4
Ä	Industrial Commercial Interchange				FLUC. The subject property alone is greater								
Future	University Village Interchange	-											
	New Community			acrea	ge than t	his figure	ri <u> </u>				100		
By	Airport	-		- 200	1 -	1 -	-	-			-		
Residential	Tradeport		- 1			-				-			
nt	Rural	1,573		99			227	14		454	50		1,387
Se	Rural Community Preserve					1					3,517		-
Si	Coastal Rural	-		1	1 4 1	1	1,338		-		-		- 2
Re	Outer Island		2	1 - 1			55			-			-
	Open Lands	80	-	1.000				0	-	30	-		1,667
	Density Reduction/ Groundwater Resource		-	-			×	100	4,742	-	F		2,101
	Conservation Lands Upland		-		-	-	- 2	- 2	- 7,52				
	Wetlands			-	-	-							
	Conservation Lands Wetland	1						-	350		1		
16	nincorporated County Total Residential	2,964	4,650	4,024	-	5,982	3,322	24,440	4,750	10,035	3,748	90	6,125
_	mmercial	326	774	938			288	900	118	1,121	19	18	72
-						2,012							12
_	dustrial	5	198	387		566	67	218	215	244	4	2	4
	n Regulatory Allocations		322								2 444		
_	blic	3,214	4,898	6,364		5,883	4,831	20,267	17,992	10,117	3,052	653	3,351
_	tive AG	5	13	5			2,780	35	12,000	90	630	4	550
_	ssive AG	10	- 3	5			70	50	2,500	250	2,000	*	2,100
_	nservation	1,677	9,786	2,232		211	15,489	1,077	41,028	1,607	382	1,465	895
	cant	20	55	158		4	2,200	14,804	2,400	1,183	850	130	1,425
To	tal	8,221	20,374	14,114		14,658	29,047	61,791	81,003	24,649	10,684	2,362	14,523
Pop	ulation Distribution (unincorporated Lee County)	14,322	44,132	54,615	· ·	76,582	13,431	162,245	17,369	110,722	5,951	741	8,653

November 2021 (Ord. No. 02-02, 03-19, 05-19, 07-13, 09-15, 09-16, 10-15, 10-16, 10-40, 10-43, 14-14, 15-10, 16-02, 16-17, 17-12, 17-23, 18-06, 19-13, 19-14, 19-16, 20-05, 21-03, 21-09)
Printed 11/06/2021



EXHIBIT T5 – ANALYSIS OF IMPACTS



DANIELS TOWN SQUARE CPA

Existing and Future Conditions Analysis

I. REQUEST

The contract purchaser for the 61.26+/- acre subject property, Bison Property Holdings, LLC ("Applicant"), is requesting a Comprehensive Plan Amendment for three changes to Lee County's Comprehensive Plan:

- Amend Map 1-A Future Land Use from General Interchange to the Intensive Development Future Land Use Category (FLUC);
- 2. Amend Map 1-C Mixed-use Overlay to add the property to the Mixed-use Overlay (MUO) north of Three Oaks Extension; and
- A Text Amendment to Lee Plan Table 1(b) to add the residential property acreage to Intensive Development and remove acreage from General Interchange.

Additionally, there is a companion zoning action being submitted to rezone from CPD to Mixed-use Planned Development (MPD) for up to 30,000 square feet of Non-Residential uses, a 200-room Hotel and Multifamily Residential. The density for the site is based on a total of 56.86 acres (56.07 acres of uplands and 0.79 acres of preserved wetlands) at 22 units per acre, which equals 1,234 dwelling units.

II. PROPERTY HISTORY

The Property is made up of six parcels with different entitlement and development histories.

Daniels Parkway JV Development

Four parcels make up the majority of the subject property covering 65.6 acres that border I-75 owned by Daniels Parkway JV Development, LLC. The properties have been owned by the group since 2007. They have been under an agricultural exemption since 2008 and have been maintained as a pasture for livestock. In 2008 the property was rezoned from Agriculture (AG-2) to Commercial Planned Development (Z-08-043) to accommodate a development program of 50,000 square feet of Medical Office, 90,000 square feet of General Office, 250,000 square feet of Retail Commercial, and a 120-room hotel, with a maximum height of 75 feet. The zoning conditions and site plan included an active eagles nest which has since been vacated and released as a nest.

The four properties were split from two parent parcels in 2021 to accommodate the Lee County right-of-way acquisition for the Three Oaks North extension/Fiddlesticks connector road. There is an active ERP Permit establishing the jurisdictional wetlands that have been identified.



III. EXISTING CONDITIONS

The property is located at the southwest corner of Daniels Parkway/Daniels 9300 and I-75. The property is surrounded by a mix of commercial uses such as a former South Trail Fire Station, Taco Bell, Waffle House and JSW Auto Repair at the northwest corner along the frontage road; two hotels and a storage business to the west with several undeveloped properties; and to the south and southwest is undeveloped properties and the Olde Hickory Golf and Country Club.

Table 1: Inventory of Surrounding Lands

	FUTURE LAND USE	ZONING	EXISTING LAND USE
NORTH	General Interchange	CPD / CT / CG	Public Facilities, Commercial and Retail
SOUTH	Outlying Suburban	RPD	Vacant / Residential Development
EAST	General Interchange	MPD	Interstate 75 / Daniels/I-75 Commerce Center MPD
WEST	General Interchange / Wetlands	AG-2 / CPD/ CT/ CG	Vacant / Storage / Hotel / Retail

The property is in an area that is one of the two most intense and significant arterial interchanges in Lee County. Daniels Parkway traverses the county east to Lehigh Acres and west to Cape Coral with major developments from Gateway and the RSW airport west to the Caloosahatchee River. The subject property is central to the densest allocations of allowances for commercial and housing development and is the major arterial that leads to the Six Mile Cypress/Metro Parkway/Plantation Road area that is set aside as an intensive development area in that many consider to be the "downtown" of Lee County.

Public infrastructure is in place or slated to be expanded to serve intense development at this location. The site has access to all major urban services including but not limited to sanitary sewer, water, fire, EMS, police, parks, public schools, solid waste, transit with nearby bus stops, and multiuse paths. Additionally, the site is in the process of being connected to the regional arterial and collector road system via Three Oaks North Extension and will benefit from a major expansion of the I-75 interchange, additional lanes on Daniels Parkway, improvements to the intersections at Fiddlesticks/Palomino Lane and new signalization at Apaloosa Lane.

The Property will have access points onto Daniels 9300 and to a signalized intersection at Three Oaks North Extension – Phases I and II, which is scheduled to be completed to the property's western boundary by early 2025. Phase III will be under construction with a tentative date for completion in mid to late 2026. This will connect the extension to Daniels Parkway at the Fiddlesticks intersection and complete the new north-south connection to Alico Road from Daniels Parkway.

Most of the property is a pasture with an active agricultural exemption since 2008. The site contains some vegetation including a primary cypress head wetland that is 0.79 acre in the center of the site (that is to be preserved), other scattered, small wetlands and scattered pines in the eastern and central portion. Other than the cypress head, the site's vegetation is mostly impacted and of lower quality containing invasive exotics. The most wooded parcel is the 5 acres south of the storage area along Indian Paint Lane easement. It is heavily wooded with invasive exotics and moderate-to low quality. Pending the ERP permit the site will be impacted as permitted and most likely used for storm water management.



IV. FUTURE CONDITIONS

The MCP that accompanies the zoning is proposing a mixed-use development of up to a 30,000 square foot of commercial development with a 200-room hotel and up to 1,251 residential dwelling units.

Access to the site will be improved over time with no project related occupancy prior to Phases I and II of the Three Oaks Expansion project being completed. There are three major actions that will likely be completed by 2029:

- Three Oaks Extension, Phases I and II that extends Three Oaks north across the canal to the western property boundary of the subject property – early 2025
- Three Oak Extension Phase III connecting Daniels to Alico Road via Fiddlesticks Boulevard

 late 2026
- Daniels Parkway lane widening and intersection improvements at Fiddlestick/Palomino and signalization at Apaloosa Lane – 2029 (dependent on FDOT coordination for I-75 interchange)
- 4. I-75 Interchange efficiency and expansion improvements 2029-2030

V. PUBLIC INFRASTRUCTURE

The Property has access to the necessary utilities to service the project and all urban services are adequate to serve the proposed development. Letters of availability have been secured from Lee County Utilities, Lee County Schools, Lee County Sheriff (Central District served by LCSO Headquarters 3.5 miles away on Six Mile Cypress), Lee County Parks and Recreation, South Trail Fire (Station #62 1.2 miles west on Daniels), Lee County Emergency Medical Services, Lee County Solid Waste, Lee Tran (served by Bus Stop #1554 via Route 50 on Daniels Parkway within ¼ mile of property).

A new ERP is in progress as the applicant withdrew the older ERP (#220526-34567). The current application (#230220-37612) addresses stormwater and drainage and determines the jurisdictional wetlands and impacts that may be permitted to the site. It should be completed over the next two months. The state is waiting on the ERP for the Three Oaks Extension to be updated with revised right-of-way boundaries. This work is being conducted by Lee County subconsultant Avalon Engineering. This needs to be completed and then the approval can be made for our application.

VI. FLUC CHANGE JUSTIFICATION

The request is to increase the potential intensity by moving the property into the Intensive Development FLUC which allows greater height and include the property in the Mixed-use Overlay which allows density to be calculated over the commercial areas. The increased potential density/intensity is justified by the following analysis.

Central Location

In the captured image of the Lee County Future Land Use Map the subject property is marked with a yellow star. The significance of this regional view is to show the central location and significance of the Daniels Parkway intersection at I-75. The interchange marks the central Lee County east-west corridor between the Caloosahatchee River and Bonita Springs. The Daniels corridor is one of two primary connectors of Lehigh to the rest of the region, the accessway to the RSW airport and the



Skyplex development, the primary road for service to the two spring training baseball stadiums, a connection to all major north-south arterials such as Treeline Avenue, Six Mile Cypress, Metro Parkway, US 41, McGregor Boulevard and Summerlin Road that serves access to Fort Myers Beach.

Infill

The road is largely developed from Treeline west to Cape Coral. The subject property is the last quadrant to be developed at the Daniels interchange to I-75. The interchange has long been identified as a service-oriented quadrant having been placed in the General Interchange FLUC. However, the northeast corner is a public facility area for a truck rest area and traffic control facility. The northwest corner is built out with hotels and restaurants but mostly dominated by the Renaissance community and low-density housing. The southeast corner is a mixed use industrial and retail center that is largely built out.


Serves Residential Rooftops

The interchange sits central to a region that has been developed with thousands of single-family dwelling units and is one of the nearest large-scale commercial service areas to thousands of homes including those as far east as Gateway and into Lehigh Acres.

Infrastructure

As has been discussed the property is currently served by all major Urban services and is in the Urban Services area for all service needs. The roadway infrastructure is planned to support an intense development by 2025-27 as identified in the Future Conditions section. The property will have access to Three Oaks North arterial which will connect the site directly to two other arterials – Daniels Parkway and Alico Road both of which have an interchange to I-75.



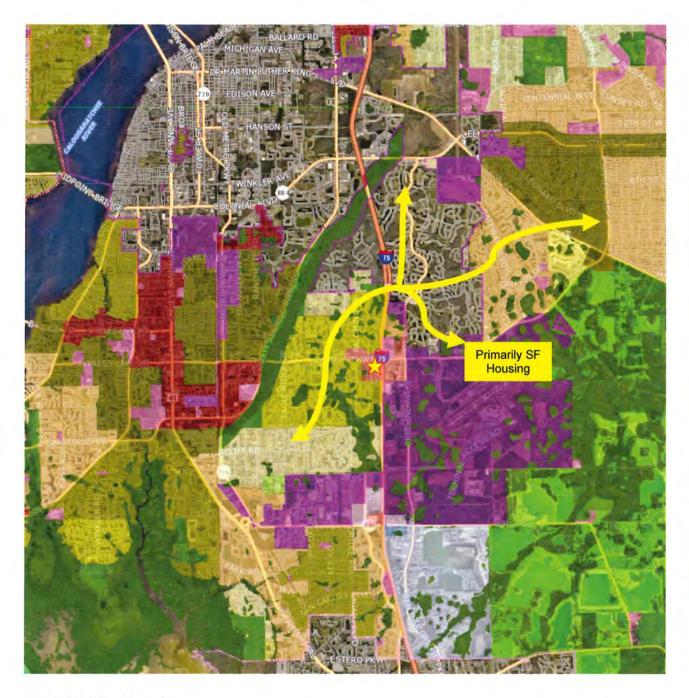

Impacts of the Request

Overall, the two land use categories, given the interchange location, have very similar density and intended permitted uses and allowances for similar intensities, except that Intensive allows for up to 12 stories and 135 feet rather than 6 stories and 75 feet and allows for inclusion into the Mixed Use Overlay (MUO).

The non-residential development intensity is not limited by floor area ratios in Lee County so the intensity per acre difference between the two categories is difficult to quantify. The uses between the two land use categories both allow for intense uses. The General Interchange FLUC encourages uses that best serve the travelling public and because of their location, market attractions, and desire for flexibility, these interchange uses permit a broad range of land uses that include tourist



commercial, general commercial, and multi-family dwelling units. The Intensive Development FLUC is also to be located along major arterial roads and similarly the available and potential levels of public services in both these areas are suited to accommodate high densities and intensities. However, in the Intensive Development category mixed use developments of high-density residential, commercial, limited light industrial, and office uses are encouraged.

The primary difference in the request does not lie in the permitted uses or the type of non-residential public services that are encouraged by the land use categories, but in the request for Mixed-use Overlay. The MUO allows the residential density to be calculated over the entire development rather than only in the area dedicated to residential uses. Because of the additional height allowed in the Intensive Development FLUC and the site-wide density calculations the request potentially allows for more floor area to be constructed and more population to be located within the project, the quantity of which is cannot be precisely calculated as it is up to the final development plan.

The companion Mixed Use Planned Development is limiting the potential density and intensity per Table 1 below. The Intensive Development FLUC allows for the use of Greater Pine Island TDU's however, the MPD is proposing to use a few of that type of bonus density.

Table 1: Density and Intensity Calculation

Parcel ID Per MCP	Use	Total Acreage	Preserved Wetlands		11004	MUO	Dens 14 du/	sity 4	Bonus Density 8 du/ac	GPITDU Bonus Density Up to 8 du/ac
1-5	Mixed Use	53.13	0.79	5.79	46.55	Yes	662	2.76	378.72	378.72
6 & 7	Residential	8.13	0	0	8.13	No	113	8.82	65.04	65.04
TOTALS		61.26	0.79	5.79	54.68	-		777	444	13*
9	13 du reques	sted out of r	maximum 444	GPITDU the	at could be	e reque	sted		1,234	

Conclusion

Intense development is good in the correct location. The quadrant has been intended for intense development. The General Interchange and Intensive Development FLUC are both similar in commercial uses permitted and residential density. The move to Intensive Development will allow for vertical density and the Mixed-use overlay will allow the density, which is limited to multi-family, to be integrated into commercial services that will be proposed for the project.





EXHIBIT T6 – LEE PLAN ANALYSIS



DANIELS TOWN SQUARE CPA

Request Statement and Lee Plan Analysis

I. REQUEST

The contract purchaser for the 61.26+/- acre subject property, Bison Property Holdings, LLC ("Applicant"), is requesting a Comprehensive Plan Amendment for three changes to Lee County's Comprehensive Plan:

- Amend Map 1-A Future Land Use from General Interchange to the Intensive Development Future Land Use Category (FLUC);
- 2. Amend Map 1-C Mixed-use Overlay to add the property to the Mixed-use Overlay (MUO) north of Three Oaks Extension
- Amend Table 1b to reallocate residential acreage from General Interchange to Intensive Development.

The desired development program is for up to 30,000 square feet of Non-Residential uses, a 200-room Hotel and Multifamily Residential of up to 1,234 du as shown in table 1 below. There are 5.19 acres of wetlands to be impacted as approved by ERP No. 230220-37612.

Table 1: Density and Intensity Calculation

Parcel ID Per MCP	Use	Total Acreage	Preserved Wetlands			MUO	Base Densi 14 du/a	Density 8 du/ac	GPITDU Bonus Density Up to 8 du/ac
1-5	Mixed Use	53.13	0.79	5.79	46.55	Yes	662.7	76 378.72	378.72
6 & 7	Residential	8.13	0	0	8.13	No	113.8	65.04	65.04
TOTALS		61.26	0.79	5.79	54.68	• 4	77	77 444	13*
,	13 du reques	sted out of r	maximum 444	GPITDU tha	at could be	reque	sted	1,234	

Additionally, there is a companion zoning action to rezone from CPD to Mixed-use Planned Development (MPD) in case DCI2022-00059.

II. PROPERTY HISTORY

The Property is made up of five (5) parcels with different entitlement and development histories.

Daniels Parkway JV Development

Four parcels make up the majority of the subject property covering 61.26 acres that border I-75 owned by Daniels Parkway JV Development, LLC. The properties have been owned by the group since 2007. They have been under an agricultural exemption since 2008 and have been maintained as a pasture for livestock. In 2008 the property was rezoned from Agriculture (AG-2) to Commercial Planned Development (Z-08-043) to accommodate a development program of 50,000 square feet of Medical Office, 90,000 square feet of General Office, 250,000 square feet of Retail Commercial, and a 120-room hotel, with a maximum height of 75 feet. The zoning conditions and site plan included an active eagle nest which has since been vacated and released as a nest.



The three properties were split from two parent parcels in 2021 to accommodate the Lee County right-of-way acquisition for the Three Oaks Parkway Extension/Fiddlesticks connector road. There is an active ERP Permit establishing the jurisdictional wetlands that have been identified.

III. EXISTING CONDITIONS

The property is located at the southwest corner of Daniels Parkway/Daniels 9300 and I-75. The property is surrounded by a mix of commercial uses such as a former South Trail Fire Station, Taco Bell, Waffle House and JSW Auto Repair at the northwest corner along the frontage road; two hotels and a storage business to the west with several undeveloped properties; and to the south and southwest is undeveloped properties and the Olde Hickory Golf and Country Club.

Table 2: Inventory of Surrounding Lands

	FUTURE LAND USE	ZONING	EXISTING LAND USE
NORTH	General Interchange	CPD/CT/CG	Public Facilities, Commercial and Retail
SOUTH	Outlying Suburban	RPD	Vacant / Residential Development
EAST	General Interchange	MPD	Interstate 75 / Daniels/I-75 Commerce Center MPD
WEST	General Interchange / Wetlands	AG-2 / CPD/ CT/ CG	Vacant / Storage / Hotel / Retail

The property is in an area that is one of the two most intense and significant arterial interchanges in Lee County. Daniels Parkway traverses the county east to Lehigh Acres and west to Cape Coral with major developments from Gateway and the RSW airport west to the Caloosahatchee River. The subject property is central to the densest allocations of allowances for commercial and housing development and is the major arterial that leads to the Six Mile Cypress/Metro Parkway/Plantation



Road area that is set aside as an intensive development area in that many consider to be the "downtown" of Lee County.

Public infrastructure is in place or slated to be expanded to serve intense development at this location. The site has access to all major urban services including but not limited to sanitary sewer, water, fire, EMS, police, parks, public schools, solid waste, transit with nearby bus stops, and multiuse paths. Additionally, the site is in the process of being connected to the regional arterial and collector road system via Three Oaks Parkway Extension and will benefit from a major expansion of the I-75 interchange, additional lanes on Daniels Parkway, improvements to the intersections at Fiddlesticks/Palomino Lane and new signalization at Apaloosa Lane.

The Property will have access points onto Daniels 9300 (ingress only) to a signalized intersection at Three Oaks Parkway Extension and to Indian Pony Drive as a temporary means of connecting to Fiddlesticks and travelling north to Daniel Parkway while the Three Oaks Parkway Extension is being completed. We understand the Three Oaks project to be completed as follows:

- Phases I and II to be completed to the property's western boundary by summer 2025.
- Phases III and IV will connect the extension to Daniels Parkway at the Fiddlesticks intersection and complete the new north-south connection to Alico Road from Daniels Parkway with a tentative date for completion summer 2027.

Most of the property is a pasture with an active agricultural exemption since 2008. The site contains some vegetation including a primary cypress head wetland that is 0.79 acre in the center of the site (that is to be preserved), other scattered, small wetlands and scattered pines in the eastern and central portion. Other than the cypress head, the site's vegetation is mostly impacted and of lower quality containing invasive exotics. The most wooded parcel is the 5 acres south of the storage area along Indian Paint Lane easement. It is heavily wooded with invasive exotics and moderate-to low quality.

IV. FUTURE CONDITIONS

The MCP that accompanies the zoning is proposing a mixed-use development of up to a 30,000 square foot of commercial development with a 200-room hotel and up to 1,234 residential dwelling units.

Access to the site will be improved over time with no project related occupancy prior to Phases I and II of the Three Oaks Parkway Extension project being completed. There are three major actions that will likely be completed by 2029:

- Three Oaks Parkway Extension, Phases I and II that extends Three Oaks Parkway Extension across the canal to the western property boundary of the subject property – early 2025.
- Three Oaks Parkway Extension Phases III and IV connecting Daniels to Alico Road via Fiddlesticks Boulevard – summer 2027.
- Daniels Parkway lane widening and intersection improvements at Fiddlestick/Palomino and signalization at Apaloosa Lane – 2028-2029 (dependent on FDOT coordination for I-75 interchange).
- I-75 Interchange efficiency and expansion improvements 2029-2030.



V. PUBLIC INFRASTRUCTURE

The Property has access to the necessary utilities to service the project and all urban services are adequate to serve the proposed development. Letters of availability have been secured from Lee County Utilities, Lee County Schools, Lee County Sheriff (Central District served by LCSO Headquarters 3.5 miles away on Six Mile Cypress), Lee County Parks and Recreation, South Trail Fire (Station #62 is 1.2 miles west on Daniels), Lee County Emergency Medical Services, Lee County Solid Waste, Lee Tran (served by Bus Stop #1554 via Route 50 on Daniels Parkway within ¼ mile of property).

A new ERP (No. 230220-37612) has been approved as the applicant withdrew the older ERP (No. 220526-34567). The approved application addresses stormwater and drainage and determines the jurisdictional wetlands and impacts that may be permitted to the site.

VI. LEE PLAN COMPLIANCE

The following is an analysis of the Comprehensive Plan Amendment, and the companion Mixed-use Planned Development, meets consistency with goals, objectives and policies of the Lee County Comprehensive Plan (Lee Plan).

POLICY 1.1.2: The Intensive Development future land use category is located along major arterial roads. By virtue of their location, the County's current development patterns, and the available and potential levels of public services, areas with this designation are suited to accommodate high densities and intensities. Mixed use developments of high-density residential, commercial, limited light industrial, and office uses are encouraged to be developed as described in Objective 11.1, where appropriate. The standard density range is from eight dwelling units per acre (8 du/acre) to fourteen dwelling units per acre (14 du/acre), with a maximum total density of twenty-two dwelling units per acre (22 du/acre). The maximum total density may be increased to thirty dwelling units per acre (30 du/acre) utilizing Greater Pine Island Transfer of Development Units.

The property is currently in the General Interchange FLUC at the southwest corner of two major arterials – Daniels Parkway (6-lane County Maintained Controlled Access Facility with expansion plans abutting the property) and I-75. The General Interchange FLUC allows for intense development with uses and density consistent with the Intensive Development FLUC being proposed in this amendment. The property is served by all categories of public infrastructure and is one of the major interchange and development areas in the County. It is central to population centers and serves as an accessible employment center and commercial services area. It is also appropriate for mixed use development allowing for multifamily density in both categories at up to 22 units per acre with the Intensive Development FLUC allowing up to 30 units per acre utilizing Greater Pine Island Transfer of Development Units. The location is correct for dense development that will promote the use of public infrastructure, capture vehicle trips and promote use of alternative forms of transportation. The Mixed-use Planned Development that accompanies this request is consistent with the goal of this FLUC.

OBJECTIVE 1.3: INTERSTATE HIGHWAY INTERCHANGE AREAS. Special areas adjacent to the interchanges of Interstate 75 that maximize critical access points will be designated on the Future Land Use Map. Development in these areas must minimize adverse traffic impacts and provide appropriate buffers, visual amenities, and safety measures. Each interchange area is designated for a specific primary role: General, General Commercial, Industrial



Commercial, Industrial, and University Village. Residential uses are only permitted in these categories in accordance with Policy 1.3.2.

The subject parcel was placed in the General Interchange FLUC because of its proximity to major population centers, it's location next to I-75 and its frontage and access to a major east-west corridor known as Daniels Parkway. The uses that are permitted are a mix of high density residential and a full range of commercial from general commercial and offices to retail and tourist serving uses such as restaurants and hotels. The desired development program is for up to 30,000 square feet of Non-Residential uses, a 200-room Hotel and Multifamily Residential density of 1,234 units. There are 0.79 acres of wetland to be preserved and 5.79 acres of wetlands to be impacted as approved in ERP (No. 230220-37612).

As proposed in companion applications for Map and Text Comprehensive Plan Amendments (CPA2022-0010 – 0011), the change from General Interchange to Intensive Development and the Mixed-use Overlay will serve to further the Objective by allowing for greater development intensity while maintaining similar uses that were deemed desirable in the General Interchange FLUC. Dense development is good in the proper locations where the parcels have access to major infrastructure that is designed for the intensity and can capture trips by serving local residential commercial needs, employment, and tourist traffic.

POLICY 1.3.2: The General Interchange areas are intended primarily for land uses that serve the traveling public: service stations, hotel, motel, restaurants, and gift shops. But because of their location, market attractions, and desire for flexibility, these interchange uses permit a broad range of land uses that include tourist commercial, general commercial, light industrial/commercial, and multi-family dwelling units. The standard density range is from eight dwelling units per acre (8 du/acre) to fourteen dwelling units per acre (14 du/acre). Maximum density is twenty-two dwelling units per acre (22 du/acre).

The property is currently in the General Interchange FLUC at the southwest corner of two major arterials – Daniels Parkway (6-lane County Maintained Controlled Access Facility with expansion plans abutting the property) and I-75. The General Interchange FLUC allows for intense development with uses and density consistent with the Intensive Development FLUC being proposed in this amendment.

The property is served by all categories of public infrastructure and is one of the major interchange and development areas in the County. It is central to population centers and serves as an accessible employment center and commercial services area east to Gateway and Lehigh Acres and west regionally to the southern portion of the city boundaries through the US 41/Daniels Parkway intersection. It is appropriate for mixed use development allowing both tourist commercial, retail and multi-family density at up to 22 units per acre.

The subject parcel was placed in the General Interchange FLUC because of its proximity to major population centers, it's location next to I-75 and its frontage and access to a major east-west corridor known as Daniels Parkway. The uses that are permitted are a mix of high density residential and a full range of commercial from general commercial and offices to retail and tourist serving uses such as restaurants and hotels. The desired development program is for up to 30,000 square feet of Non-Residential uses, a 200-room Hotel and Multifamily Residential density of 1,234 units. There are 0.79 acres of wetlands to be preserved and 5.79 acres of wetlands to be impacted as approved in ERP (No. 230220-



37612). These uses are consistent with the General Interchange FLUC as described in this policy.

OBJECTIVE 2.1: DEVELOPMENT LOCATION. Contiguous and compact growth patterns will be promoted through the rezoning process to contain urban sprawl, minimize energy costs, conserve land, water, and natural resources, minimize the cost of services, prevent development patterns where large tracts of land are by-passed in favor of development more distant from services and existing communities.

The proposed rezoning will allow for a clustered and logical development pattern in an area readily serviced by public infrastructure, in direct compliance with the above policy. As outlined in detail within the application, the project represents an infill development within an urbanized area of Lee County where commercial development is encouraged along the Daniels Parkway corridor.

OBJECTIVE 2.2: DEVELOPMENT TIMING. Direct new growth to those portions of the Future Urban Areas where adequate public facilities exist or are assured and where compact and contiguous development patterns can be created. Development orders and permits (as defined in F.S. 163.3164(7)) will be granted only when consistent with the provisions of Sections 163.3202(2)(g) and 163.3180, Florida Statutes and the county's Concurrency Management Ordinance.

The Applicant has provided letters of availability and a detailed explanation of the public facilities and services available to support future development of the Property. The proposed rezoning fully complies with the above policy's intent to direct new growth to appropriate Future Urban Areas of the county.

POLICY 2.2.1: Rezoning's and Development of Regional Impact proposals will be evaluated as to the availability and proximity of the road network; central sewer and water lines; community facilities and services such as schools, EMS, fire and police protection, and other public facilities; compatibility with surrounding land uses; and any other relevant facts affecting the public health, safety, and welfare.

The road network in the region has been specifically constructed to support large-scale employment centers and commercial activity that is dependent on access to major transportation networks. Daniels Parkway connects to I-75 and the Ben Hill Griffin Parkway, providing ample access to customers and employees. All other urban services are in place to support the request.

GOAL 4

Standard 4.1.1 & 4.1.2: Water & Sewer

Potable water and sanitary sewer services are available to service the development as outlined in the attached Availability Letter provided by Lee County Utilities.

Standard 11.3. Transportation

Approval of the request is based on the ultimate buildout of the subject property. The local transportation network is not currently in place to absorb the projected development program; however, the network is in various stages of completion that will serve the property with sufficient capacity.

Offsite improvements listed below will allow the road network to support the proposed development program as phases of improvements take place over the next 2-5 years. The



TIS report outlines the ability of the network to handle the project as improvements take place which includes:

- 1. Three Oaks Parkway Extension, Phases I and II that extends Three Oaks Parkway Extension across the canal to the western property boundary of the subject property early 2025.
- 2. Three Oaks Parkway Extension Phases III and IV connecting Daniels to Alico Road via Fiddlesticks Boulevard - summer 2027.
- 3. Daniels Parkway lane widening and intersection improvements at Fiddlestick/Palomino and signalization at Apaloosa Lane - 2028-2029 (dependent on FDOT coordination for I-75 interchange).
- 4. I-75 Interchange efficiency and expansion improvements 2029-2030.

GOAL 6 (COMMERCIAL LAND USES)

POLICY 6.1.1

a. Traffic and access impacts;

The gross floor area and density requested has been analyzed by TR Transportation. The road network, as proposed to be improved regionally, will be able to support the proposed project, particularly, and necessarily, Phases I and II of the Three Oaks Parkway Extension that is a required portion in order to receive an occupancy permit for the development. Applicant agrees to not occupy Phase I of the development plan until there is public access onto the Three Oaks Parkway Extension with full connection south to Alico Road.

c. Screening and buffering;

The project is offering enhanced buffers along Three Oaks Parkway Extension. The mixeduse overlay (MUO) is part of the northern parcel requested comprehensive plan amendment. The MUO only requires 5' Type "A" buffers; nevertheless, the applicant is proposing typical 15' Type "D" buffers along Three Oaks. The southern parcel is not being recommended by staff to be moved in to the MUO and applicant agrees; therefore, applicant intends to meet the LDC requirements for buffering.

d. Availability and adequacy of services and facilities;

This area is programmed to be a major mixed-use corridor. As such Lee County Utilities has adequate services for substantial commercial and high-density residential development as evident by the letters of utility availability contained in the comprehensive plan package.

e. Impact on adjacent land uses and surrounding neighborhoods;

The zoning conditions and LDC requirements have adequately addressed impacts on adjacent uses. Impacts are minimal due to the proximity of similar uses and bordering by major arterial corridors. All surrounding zonings and land uses are similar in intent and intensity.

f. Proximity to other similar centers; and

The subject property is one of four quadrants of an intersection of a major arterial and Interstate Highway. The northwest and southeast quadrants are intensely developed with a



mix of residential, commercial and industrial development. Typically, similar quadrants to the north and south, at intersections like I-75 and SR82, SR80, Colonial, Alico Road, etc., develop with similar intensities and densities or mixed-use developments such as is being requested in this application.

g. Environmental considerations.

According to the Environmental Assessment produced by Brown Collins, Synecological Analysts, all native communities except the Cypress heads (FLUCCS 621) have been disturbed over an extended period of time as a result of AG management practices. Disturbance influenced the considerable majority of this site and occurred in progressive fashion. A review of historical aerial photographs and comparing soil profiles with typic soil profiles for the series that originally comprised the site show that some areas were logged in the historic past and this logging activity continued into this decade.

Nevertheless, the cypress head that occupies 0.79 acres in the center of the project is a viable indigenous area that will be preserved according to the Indigenous Management Plan that is part of this application.

Given the highly impacted nature of much of the site, the relative paucity of listed species is not surprising. The small and disjunct nature of many of the wooded communities and the almost total absence of any wildlife forage in all strata may account in large part of the absence of listed species. It is possible that some protected species might use the area, the likelihood of high forage or residence usage is unlikely because of extremely low habitat quality in all areas except the cypress heads.

A new ERP has been approved as the applicant withdrew the older ERP (No. 220526-34567). The approved application (No. 230220-37612) addresses stormwater and drainage and determines the jurisdictional wetlands and impacts that may be permitted to the site.

POLICY 6.1.4: Commercial development will be approved only when compatible with adjacent existing and proposed land uses and with existing and programmed public services and facilities.

The property abuts commercial development to the west and north. To the east is I-75 and then the Jetport mixed-use commercial and industrial park. To the south is the Olde Hickory Golf and Country Club. The residential area to the south is a lower density development than the applications request. Compatibility is achieved by the layout of the proposed Master Concept Plan (MCP) that places lakes and buffers between the Country Club and the closest multi-family building that is no less than 200 feet north. The most dense and intense commercial area is across the right-of-way for Three Oaks North. The area is programmed for centralized intensities that support commercial, retail, recreational, and hospitality uses in conformation of the mixed-use development.

Extensive coordination and outreach have been done with the residential developments to the south: Olde Hickory, Legends and Fiddlesticks Golf and County Clubs. Olde Hickory has been the agreed upon point of contact for the three neighborhoods. We had discussions after our initial proposal and then two additional meetings since our revised primarily residential submission. There were substantial changes from the initial commercial intensity and residential density.



Our first submittal showed 500,000 square feet of commercial and over 1,450 residential units with heights on the residential portions exceeding 100 feet and 9-stories, including a 9-story tower on the southern "triangle" shaped parcel that abut Olde Hickory. Our subsequent design has reduced the request to 1,234 multi-family units, 30,000 square feet of commercial and a 200-room hotel. Important to Olde Hickory, we reduced the abutting "triangle" parcel to only house low rise commercial. We also reduced the closest building to Three Oaks Parkway Extension on the north side from 100 feet to a max of 60 feet and 5-stories and 45 feet and 4 stories. The reduction in height wasn't as much as they would like but we feel this is a compromise that is justified.

The applicant produced a line of site study to show that the substantial distances and provided buffering, as well as trees already existing on the Olde Hickory property block the majority of lights and buildings and what can be seen is a minimum of 1,300 feet away. Additionally, Olde Hickory hired Q Grady Minor civil engineers to review our ERP and grading plan. We came to agreements that our drainage and grading plans were substantially correct but were requested to design our berm to the 100-year storm level rather than the typical 25-year 3-day event.

POLICY 6.1.5: The land development regulations will require that commercial development be designed to protect the traffic-carrying capacity of roads and streets. Methods to achieve this include, but are not limited to: frontage roads; clustering of activities; limiting access; sharing access; setbacks from existing rights-of-way; acceleration, deceleration and right-turn-only lanes; and, signalization and intersection improvements.

As has been mentioned numerous times in this application, the current roadway system is not adequate to support the proposed development. The programmed roadway network improvements by the State and Lee County to Three Oaks, Daniels Parkway, and I-75 will address the needs of the development. All other necessary improvements to carry the proposed volume of trips that will be necessary to handle in order to secure development orders for the development.

POLICY 6.1.7: Prohibit commercial developments from locating in such a way as to open new areas to premature, scattered, or strip development; but permit commercial development to infill on small parcels in areas where existing commercial development would make a residential use clearly unreasonable.

This policy does not exactly apply. The area is well-suited for a mixed-use development that is infill and appropriate for commercial and residential uses.

GOAL 11: MIXED USE.

POLICY 11.1.1: Developments located within the Intensive Development, Central Urban, or Urban Community future land use categories that have existing connectivity or can demonstrate that connectivity may be created to adjacent neighborhoods are strongly encouraged to be developed with two or more of the following uses: residential, commercial (including office), and light industrial (including research and development use). (Ord. No. 17-13)

The subject parcel is in proposed to be in the Intensive Development FLUC and in the Mixed-Use overlay (MUO). The property is currently in the General Interchange FLUC and therefore has been consistent with this Goal as it allows multi-family and a wide range of commercial



and light industrial uses. The move to Intensive Development FLUC and the MUO will serve to further codify the location as appropriate and desirable for mixed uses.

OBJECTIVE 11.2: MIXED USE OVERLAY.

POLICY 11.2.1: The Mixed Use Overlay identifies locations where mixed use development will have a positive impact on transportation facilities though increased transit service, internal trip capture, and reduced travel distance. Requests to expand the Mixed Use Overlay will be evaluated based on all of the following criteria:

1. Located within the extended pedestrian shed of established transit routes; and,

Transit is available within ¼ to ½ mile of the majority of the development. Lee Tran (served by Bus Stop #1554 via Route 50 on Daniels Parkway within ¼ mile of property).

There are two principal definitions for pedestrian sheds:

- 1. The first is commonly referred to as the Standard Pedestrian Shed, which is defined as a 5-minute walk or ½ mile or 1,320 feet.
- 2. The second has been called the Long Pedestrian Shed or ½ mile radius or 2,640 feet and a 10-minute walk, which has been used by transit-oriented development standards for access to work and play and by jurisdictions and advocacy groups to be the standard for access to recreational facilities such as parks and open space.

ADDITIONAL DISCUSSION AND REFERENCES BY TRANSPORTATION AND PLANNING AUTHORITIES:

FDOT Florida Greenbook

Transit-Oriented Development (TOD) - a regional center development with transit available or proposed. TODs are developments that are moderate to high density, mixed-use, and walkable development designed to facilitate transit and accommodate multiple modes of transportation. TODs generally encompass a radius of ¼ or ½ miles of a transit station, a distance most pedestrians are willing to walk.

https://www.fdot.gov/docs/default-source/roadway/floridagreenbook/tnd-handbook.pdf

"Walkability Measures for Florida", Florida Resources and Environmental Analysis Center, Florida State University

Walkability is "the extent to which the built environment supports and encourages walking by providing for pedestrian comfort and safety, connecting people with varied destinations within a reasonable amount of time and effort and offering visual interest in journeys throughout the network"

Law Insider

Pedestrian Shed means an area, approximately circular, that is centered on a common destination. A Pedestrian Shed is applied to determine the approximate size of a neighborhood. A Standard Pedestrian Shed is ¼ mile radius or 1320 feet, about the distance of a five-minute walk at a leisurely pace. It has been shown that provided with a pedestrian environment, most people will walk this distance rather than drive. The outline of the shed must be refined according to actual site conditions, particularly along Thoroughfares.

A Long Pedestrian Shed is ½ mile radius or 2640 feet and may be used for mapping when transit is present or proposed. (Sometimes called a "walk- shed" or "walkable catchment.")



Trust for Public Lands

The Department of Transportation agrees that most people can walk a half-mile in about 10 minutes. At The Trust for Public Land, we believe everyone should be able to reach a park in that amount of time—no matter what kind of neighborhood you live in. https://www.tpl.org/blog/why-the-10-minute-walk

10MINUTEWALK.ORG, sponsored by ULI, NRPA and Trust for Public Land

Make the 100% Promise to ensure that everyone in your city has safe, easy access to a quality park within a 10-minute walk of home by 2050.

FDOT Traditional Neighborhood Design Handbook

Pedestrian shed - an area, approximately circular, that is centered on a common destination. A pedestrian shed is applied to determine the approximate size of a neighborhood. A standard pedestrian shed is ¼ mile radius, or 1320 feet, about the distance of a five-minute walk at a leisurely pace.

2. Distinct pedestrian and automobile connections to adjacent uses can be achieved without accessing arterial roadways; and,

Pedestrian interconnection will be made with sidewalks and multi-use paths along Three Oaks Parkway Extension and Daniels Parkway. An internal sidewalk system will allow for residents of this project to access alterative form of transportation to automobiles. The users of this project will be able to access local commercial uses via two Daniels 9300 (ingress only for automobiles) and Indian Pony Drive without travelling onto Three Oaks Parkway Extension or Daniels Parkway.

3. Located within the Intensive Development, Central Urban, or Urban Community future land use categories; and,

The requested Map 1-C change in this application will add this property into the MUO, while the requested Map 1-A change in this application will amend the FLUC from General Interchange to Intensive Development creating consistency with this policy.

4. Availability of adequate public facilities and infrastructure; and

The Property has access to the necessary utilities to service the project and all urban services are adequate to serve the proposed development. Letters of availability have been secured from Lee County Utilities, Lee County Schools, Lee County Sheriff (Central District served by LCSO Headquarters 3.5 miles away on Six Mile Cypress), Lee County Parks and Recreation, South Trail Fire (Station #62 1.2 miles west on Daniels), Lee County Emergency Medical Services, Lee County Solid Waste, Lee Tran (served by Bus Stop #1554 via Route 50 on Daniels Parkway within ¼ mile of property).

Additionally, the site is in the process of being connected to the regional arterial and collector road system via Three Oaks Parkway Extension and will benefit from a major expansion of the I-75 interchange and Daniels Parkway. Daniels Parkway is going to see improvements to the intersections at Fiddlesticks/Palomino Lane.

Will not intrude into predominately single-family residential neighborhoods.

To the south is the Olde Hickory Golf and Country Club. The parcel south of the Three Oaks Parkway Extension will be low-rise commercial. Compatibility is achieved by the layout of the proposed Master Concept Plan (MCP) that places lakes and buffers between the Country Club and the closest building. The residential building on Parcel 6 is at least 600 feet from the nearest residence and restricted in height to 35 feet, the height permitted for single-family



homes. The most dense and intense area is across the right-of-way for Three Oaks Parkway Extension and is restricted to 5-stories and 60 feet. A line-of-sight study shows 1,000+ distance to any building over 45 feet.

POLICY 11.2.4: Use of conventional zoning districts will be encouraged within the Mixed-Use Overlay in order to promote continued redevelopment. (Ord. No. 17-13)

The proposed development is centrally located, as identified in the Lee Plan

OBJECTIVE 39.7: COMMUNITY IMPACTS.

POLICY 39.7.1: Alignments of new and expanded roads and other transportation improvements will be selected to maximize the benefit/cost ratio while:

- · Minimizing the number of businesses and residences displaced.
- · Using major roads to define neighborhoods.
- Facilitating the development of Mixed Use Overlay areas, promoting infill and redevelopment.
- Distributing traffic loadings among available facilities.
 Improvements are being made publicly and will be added to by private improvements made by the developer and applicant.

LEE PLAN GOAL 54

POLICY 54.1.2: In developing and implementing local landscape regulations including the preservation, reforestation, and wetlands restoration requirements, preference will be given to native species which are adapted to the region's climatic regime.

The development will be required to bring the landscaping up to current code and will comply with all native vegetation requirements as agreed to in conditions for the Mixed-use Planned Development.

POLICY 54.1.6: Maintain development regulations that require new development to connect to a reuse water system if a system is near the development and has sufficient capacity.

Reuse is available at this location according to Lee County Utilities and the project will connect.

LEE PLAN OBJECTIVE 60.3: Examine steps necessary to restore principal flow-way systems to assure the continued environmental function, value, and use of natural surface water flow-ways and associated wetland systems.

The subject site has an approved SFWMD ERP which takes into account the Six Mile watershed. The stormwater management system will route stormwater water via swales and pipe network into the proposed dry detention area and then through piping into the network of lakes (as shown on the exhibit) with eventual outfall into the existing system serving Olde Hickory Golf and Country Club. See the Surface Water Management Plan for a larger detail of the below exhibit.



POLICY 60.4.1: Encourage new developments to design surface water management systems with Best Management Practices including, but not limited to, filtration marshes, grassed swales planted with native or Florida Friendly Landscaping vegetation, retention/detention lakes with enlarged littoral zones, preserved or restored wetlands, and meandering flowways.

The design of the surface water management systems with align with Best Management Practices including, but not limited to the following: grassed swales planted with native or Florida Friendly Landscaping vegetation, retention/detention lakes with littoral zones, and a restored indigenous area. The design will meet all requirements of the LDC (except where approved deviations occur) and all requirements of the ERP.

POLICY 61.1.1: Lee County recognizes that all fresh waters are a resource to be managed and allocated wisely, and will support allocations of the resource on the basis 1) of ensuring that sufficient water is available to maintain or restore valued natural systems, and 2) of assigning to any specified use or user the lowest quality freshwater compatible with that use, consistent with financial and technical constraints.

The subject site has an approved a SFWMD ERP (No. 230220-37612) which takes into account the Six Mile watershed. The approved master drainage system through the ERP will be in compliance with this policy. Modifications will be made to the approved ERP for the final site design at time of DO.

POLICY 61.3.12: The design of shorelines of retention and detention areas and other excavations must be sinuous rather than straight.

The lakes will be sinuous in design. We are not seeking deviations which we understand are not available.

POLICY 95.1.3: LOS standards will be the basis for planning and provision of required public facilities and services within Lee County. Regulatory LOS standards will be the basis for determining the adequacy of public facilities for the purposes of permitting new development. Compliance with non-regulatory LOS standards will not be a requirement for continued development permitting, but will be used for facility planning purposes. The LOS will be the basis for facility design, for setting impact fees, and (where applicable) for the operation of the Concurrency Management System (CMS).

- a. <u>Sanitary Sewer</u> Lee County Utilities currently serves the site and has capacity. LCU has stated in a letter of availability that they have capacity to establish service.
- b. <u>Potable Water</u> Lee County Utilities currently serves the site and has capacity. LCU has stated in a letter of availability that they have capacity to establish service.
- c. <u>Surface Water/Drainage Basins</u> The property is intended to be developed as part of a Mixed use Planned Development. The project will be required to meet all LDC provisions for surface water management, pre-treatment, storage and treatment including the System Requirement: Prevent the flooding of designated evacuation routes on The Lee Plan Map 15 from the 25-year, 3-day storm event (rainfall) for more than 24 hours.
- d. <u>Parks</u>, <u>Recreation</u>, <u>and Open Space</u> The density has already been calculated as both land use categories allow for similar density, so there is no provision needed for parks, recreation or open space. Regardless, the County exceeds the available capacity needs:
 - Required Capacity 5,202 acres of regional parks and 289 acres of community parks.
 - Available Capacity 7,051 acres of regional parks and 832 acres of community parks.



e. Public Schools - The density has already been calculated as both land use categories allow for similar density so there is no provision needed for public schools in the South Zone. Nevertheless, the Lee County School District has said the will provide capacity for the development.

POLICY 123.2.2: Continue to provide regulations and incentives to prevent incompatible development in and around environmentally sensitive lands.

There is a cypress head wetland that has a FLUCCS code of 621 that is moderate quality and qualifies and indigenous central to the project site. The area is 0.79 acres and is part of the preservation for this site and is included in on the MCP. There is also an indigenous restoration plan included for this area.

Otherwise, development activity must remain in compliance with applicable state wetland permits and applicable local development permits. If impacts to wetlands are not permitted by the State or if issued state wetland permits are inconsistent with proposed impacts to wetlands depicted within local development permit approvals, Developer must amend local development permit approvals to be consistent with issued state wetland permits or applicable Lee Plan and Land Development Code regulations pertaining to development within wetlands.

POLICY 123.2.4. Encourage the protection of viable tracts of sensitive or high-quality natural plant communities within developments.

The proposed wetland preservation of the 0.79-acre area central to the site includes a restoration plan and meets the indigenous preservation available to this property.

POLICY 124.1.1: Ensure that development in wetlands is limited to very low density residential uses and uses of a recreational, open space, or conservation nature that are compatible with wetland functions. The maximum density in the Wetlands category is one unit per 20 acres, except that one single family residence will be permitted on lots meeting the standards in Chapter XIII, and except that owners of wetlands adjacent to Intensive Development, General Interchange, Central Urban, Urban Community, Suburban, New Community, Outlying Suburban, and Sub-Outlying Suburban areas may transfer densities to developable contiguous uplands under common ownership (see Table 1(a)).

Beyond the 0.79 acre wetland that will be preserved there are 5.98 acres of potential wetlands that are scattered and of low-quality that are proposed to be impacted as approved the SFWMD ERP in April 2024.

The applicant understands that for development that proposes impacts to wetlands, construction may not commence until issuance of required state permits. Development activity must remain in compliance with applicable state wetland permits and applicable local development permits. If impacts to wetlands are not permitted by the State or if issued state wetland permits are inconsistent with proposed impacts to wetlands depicted within local development permit approvals, Developer must amend local development permit approvals to be consistent with issued state wetland permits or applicable Lee Plan and Land Development Code regulations pertaining to development within wetlands.

POLICY 124.1.2 The County's wetland protection regulations must be consistent with policy items 1 - 6 of this section.

For development that proposes impacts to wetlands, construction may not commence until issuance of required state permits. Development activity must remain in compliance with applicable state wetland permits and applicable local development permits. If impacts to wetlands are not permitted by the State or if issued state wetland permits are inconsistent



with proposed impacts to wetlands depicted within local development permit approvals, Developer must amend local development permit approvals to be consistent with issued state wetland permits or applicable Lee Plan and Land Development Code regulations pertaining to development within wetlands.

The applicant's proposed project is designed and permitted to comply with sections 1-6 of this Policy.

POLICY 125.1.2: New development and additions to existing development must not degrade surface and ground water quality.

As mentioned, because it is being rezoned to a mixed-use planned development the site will now have to comply with water quality requirements according to the LDC at the time of local development order.

POLICY 125.1.3: The design, construction, and maintenance of artificial drainage systems must provide for retention or detention areas and vegetated swale systems that minimize nutrient loading and pollution of freshwater and estuarine systems.

As mentioned, because it is being rezoned to a mixed-use planned development the site will now have to comply with water quality requirements according to the LDC at the time of local development order.

POLICY 125.1.4: Developments which have the potential of lowering existing water quality below state and federal water quality standards will provide standardized appropriate monitoring data.

As mentioned, because it is being rezoned to a mixed-use planned development the site will now have to comply with water quality requirements according to the LDC at the time of local development order.

IX. CONCLUSION

Intense development is good in the correct location. The subject property, located in the southwest quadrant of I-75 and Daniels Parkway, has been programmed through Lee County policy for intense development. The General Interchange and the proposed Intensive Development FLUC are both similar in commercial uses permitted and residential density. The move to Intensive Development will allow for vertical density and the Mixed-use overlay will allow the density, which is limited to multifamily, to be integrated with commercial services that will serve the immediate residents of this area, capture vehicle trips, take advantage of urban services already in place, and spur offsite improvements to traffic circulation that have been necessary for a significant amount of time in this area.





EXHIBIT T7 – TRAFFIC CIRCULATION ANALYSIS



2726 OAK RIDGE COURT, SUITE 503 FORT MYERS, FL 33901-9356 OFFICE 239.278.3090 FAX 239.278.1906

> TRAFFIC ENGINEERING TRANSPORTATION PLANNING SIGNAL SYSTEMS/DESIGN

TRAFFIC IMPACT STATEMENT

FOR

DANIELS TOWN CENTER

(PROJECT NO. F2208.06)

PREPARED BY:

TR Transportation Consultants, Inc. Certificate of Authorization Number: 27003 2726 Oak Ridge Court, Suite 503 Fort Myers, Florida 33901-9356 (239) 278-3090

> Revised: April 16, 2024



CONTENTS

		200			
I.	TAT	Γ RO	TIT	TOT	TANT
1			11 11	March 1	
	AIN			/ / /	

- II. EXISTING CONDITIONS
- III. PROPOSED DEVELOPMENT
- IV. TRIP GENERATION
- V. TRIP DISTRIBUTION
- VI. FUTURE TRAFFIC CONDITIONS
- VII. PROJECTED LEVEL OF SERVICE AND IMPROVEMENTS
- VIII. INTERSECTION ANALYIS
- IX. CONCLUSION



I. INTRODUCTION


TR Transportation Consultants, Inc. has conducted a traffic impact statement to fulfill requirements set forth by the Lee County Department of Community Development for projects seeking rezoning approval. The proposed development is located at the southwest quadrant of the interchange of I-75 and Daniels Parkway in Lee County, Florida. The approximate location of the subject site is illustrated on Figure 1.

The approximate 66-acre subject site is currently zoned CPD, CT and AG-2. The applicant is requesting to rezone the subject site to a Mixed Use Planned Development (MPD) to allow the development of up to approximately 30,000 square feet of commercial uses and 1,251 residential dwelling units and up to 200 hotel rooms. Access to the subject site will be provided to the future Three Oaks Parkway extension and to Daniels Parkway via an existing frontage road (Daniels 9300).

This report examines the impact of the development on the surrounding roadways and intersections. Trip generation and assignments to the various site access drives were completed and an analysis conducted to determine the impacts of the development on the surrounding streets and intersections.

II. EXISTING CONDITIONS

The subject site is currently vacant. The overall site is bordered by Daniels Parkway to the north and I-75 to the east, vacant land and the Olde Hickory Golf Course maintenance facility to the south, and vacant property and commercial uses to the west.

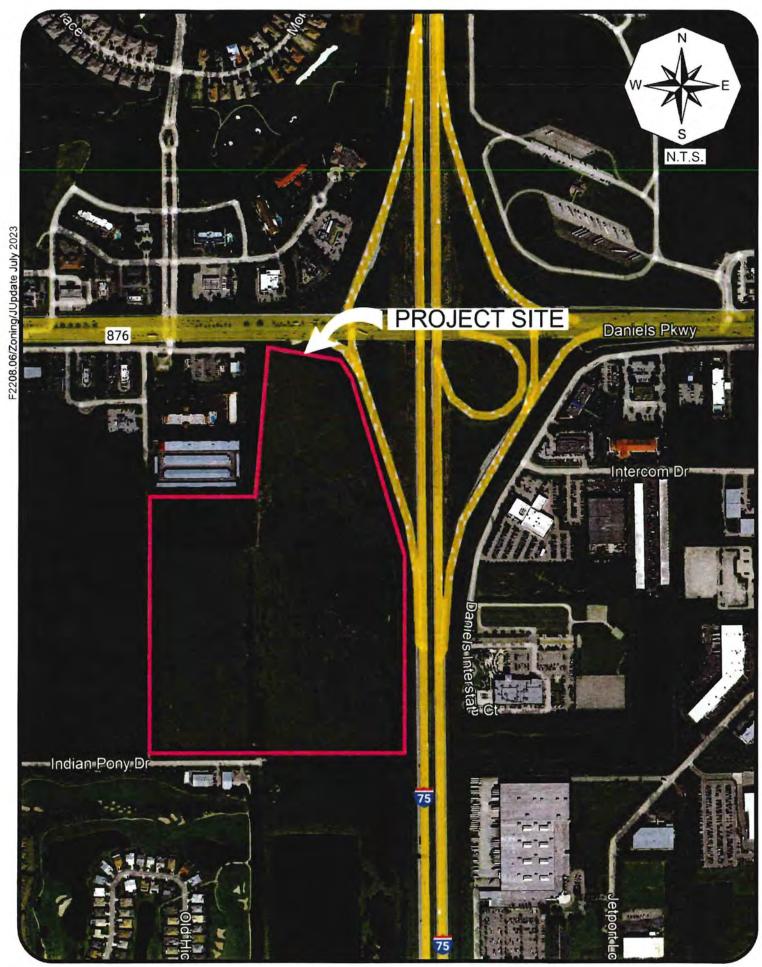



PROJECT LOCATION MAP DANIELS TOWN CENTER



Daniels Parkway is a six-lane divided arterial roadway in the vicinity of the subject site. Daniels Parkway from Metro Parkway to I-75 has been defined as a "constrained" roadway, which enables Lee County to assign a higher volume to capacity (v/c) ratio to this roadway. No direct access to Daniels Parkway is being requested. Daniels Parkway has a posted speed limit of 50 mph and is under the jurisdiction of the Lee County Department of Transportation.

Three Oaks Parkway from Daniels Parkway to the southern property boundary is under design and is funded to be constructed starting in 2023 through 2025 from the Fiddlesticks Canal north to Daniels Parkway as a four-lane divided roadway. Three Oaks Parkway will be under the jurisdiction of the Lee County Department of Transportation.

III. PROPOSED DEVELOPMENT

The majority of the approximately 66-acre subject site is currently zoned CPD under Zoning Resolution Z-08-043. This resolution approved 250,000 square feet of commercial retail uses, 90,000 square feet of general office uses, 50,000 square feet of medical office uses and up to 120 hotel rooms on the site. The proposed rezoning would decrease the commercial intensity and allow for the inclusion of multi-family residential dwelling units on the site to create a mixed-use development. **Table 1** summarizes the land uses utilized for the purposes of this analysis.

Table 1 Land Uses Daniels Town Square

Land Use	Size				
Retail	30,000 square feet				
Multi-Family Dwelling Units	1,251 Units				
Hotel	200 Rooms				

Access to the subject site will be provided to the Three Oaks Parkway extension as well as to Daniels Parkway via the existing connection west of I-75.



IV. TRIP GENERATION

The trip generation for the proposed development was determined by referencing the Institute of Transportation Engineer's (ITE) report, titled *Trip Generation Manual*, 11th Edition. Land Use Code 822 (Strip Retail Plaza <40k) was utilized for the trip generation purposes of the proposed commercial retail uses, Land Use Code 221 (Multi-Family Housing – Mid-Rise) was used for the multi-family dwelling units and Land Use Code 310 (Hotel) was utilized for the hotel rooms. The trip generation equations utilized from these land uses are attached to the Appendix for reference. **Table 2** outlines the anticipated weekday A.M. and P.M. peak hour and daily trip generation of the development as currently proposed. Included in the Appendix of this report is a comparison of the trip generation between the proposed uses illustrated in Table 1 and the approved used within the CPD under Z-08-043.

Table 2
Trip Generation – Total Trips
Daniels Town Square

	Weekda	y A.M. Pe	ak Hour	Weekd	Daily		
Land Use	In	Out	Total	In	Out	Total	(2-way
Shopping Center (30,000 Sq. Ft.)	36	23	59	85	85	170	1,496
Multi-Family (1,251 Units)	124	415	539	298	190	488	5,921
Hotel (200 Rooms)	52	41	93	61	59	120	1,744
Total Trips	212	479	691	444	334	778	9,161

However, the total trips generated by the project will not all be new trips added to the adjacent roadway system. With mixed use projects, ITE estimates that there will be a certain amount of interaction between uses that will reduce the overall trip generation of the proposed project. This interaction is called "internal capture". In other words, trips that would normally come from external sources would come from uses that are within the project, thus reducing the overall impact the development has on the surrounding



roadways. ITE, in conjunction with a study conducted by the NCHRP (National Cooperative Highway Research Program), has summarized the internal trip capture reductions between various land uses. For uses shown in Table 2, there is data in the ITE report for interaction between the residential, retail and hotel uses.

An internal capture calculation was completed consistent with the methodologies in the NCHRP Report and published in the ITE *Trip Generation Handbook*, 3rd Edition. The resultant analysis indicates that with the proposed development scenario there will be an internal trip capture reduction of two percent (2%) in the A.M. peak hour and eleven percent (11%) in the PM peak hour between the residential, retail and hotel uses. The summary sheets utilized to calculate these internal capture rates for the weekday AM peak hour and PM peak hour are included in the Appendix of this report for reference.

Pass-by traffic was also taken into account based on the proposed retail uses shown in Table 2. Consistent with previous analysis approved by Lee County, thirty percent (30%) of the total project traffic was assumed to be pass-by traffic for the retail uses. **Table 3** indicates the total commercial and residential external trip generation of the subject site based on the proposed rezoning request.

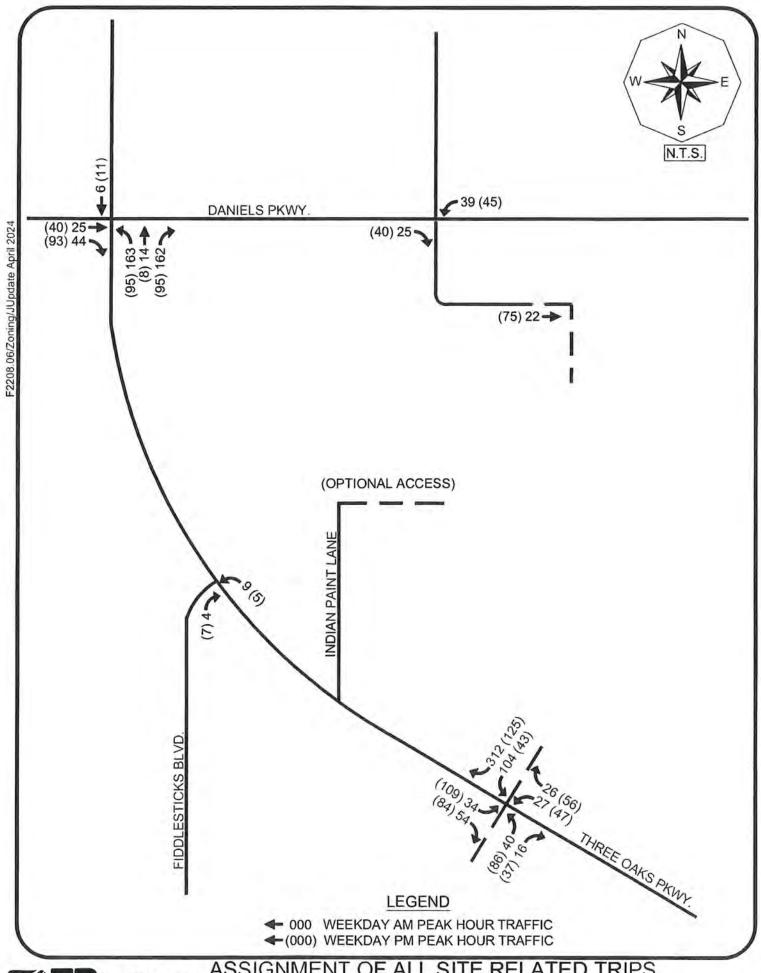


Table 3
Trip Generation – Net New Trips
Daniels Town Square

T was A Trans	Weekda	ay A.M. Pe	ak Hour	Weekd	eak Hour	Daily	
Land Use	In	Out	Total	In	Out	Total	(2-way)
Retail (30.000 Sq. Ft)	36	23	59	85	85	170	1,496
Multi-Family (1.251 Units)	124	415	539	298	190	488	5,921
Hotel (200 Room)	52	41	93	61	59	120	1,744
Total	212	479	691	444	334	778	9,161
Less Internal Capture	-7	-7	-14	-43	-43	-86	-1,007
Less Pass-By Trips	-7	-8	-15	-20	-20	-40	-448
Net New Trips	198	464	662	381	271	652	7,706

V. TRIP DISTRIBUTION

The trips the proposed development is anticipated to generate were then assigned to the surrounding roadway network. The trips were also distributed to the surrounding roadway network, including Three Oaks Parkway south of the site since the extension of Three Oaks Parkway to Daniels Parkway is under construction and programmed to be open in the next 5 years. The net new trips anticipated to be added to the surrounding roadway network were assigned based upon the routes drivers are anticipated to utilize to approach the subject site. Figure A-1, included in the Appendix of this report, illustrates the percent project traffic distribution and assignment of the net new project trips. Figure A-2, included in the Appendix of this report, illustrates the percent project traffic distribution and assignment of pass-by trips. Figure 2 illustrates the resulting assignment of all project related trips (net new + pass-by).





ASSIGNMENT OF ALL SITE RELATED TRIPS
NET NEW + PASS-BY TRIPS
DANIELS TOWN CENTER




In order to determine which roadway segments surrounding the site may be significantly impacted as outlined in the Lee County Traffic Impact Statement Guidelines, Table 1A, in the Appendix, was created. This table indicates which roadway links will accommodate greater than 10% of the Peak Hour Level of Service "C" volumes. The Level of Service threshold volumes were obtained from the *Lee County Generalized Peak Hour Directional Service Volume Tables* (June, 2016). Based on Table 1A, none of the roadway segments in the study area projected to be significantly impacted as a result of the proposed development. A copy of the Generalized Service Volume Table is located in the Appendix of this report for reference.

VI. FUTURE TRAFFIC CONDITIONS

A horizon year analysis of 2027 was selected as the analysis year to evaluate the future impacts this project will have on the surrounding roadway network. Based on this horizon year, a growth rate was applied to the existing traffic conditions for all roadway links in the study area. Based on the project distribution illustrated on Figure A-1, the link data was analyzed for the year 2027 without the development and year 2027 with the development. The only trips added to the roadway network in 2027 were the net new trips that the development would add as illustrated in Table 3. **Table 2A** in the Appendix of the report indicates the methodology utilized to obtain the year 2027 build-out traffic volumes as well as the growth rate utilized for each roadway segment. The base year traffic volumes were obtained from the 2022 Lee County Public Facilities Level of Service and Concurrency Report.

Figure 3 indicates the year 2027 peak hour – peak direction traffic volumes and Level of Service for the various roadway links within the study area. Noted on Figure 3 is the peak hour – peak direction volume and Level of Service of each link should no development occur on the subject site and the peak hour – peak direction volume and Level of Service for the weekday A.M. and P.M. peak hours with the development traffic added to the roadways. This figure is derived from Table 2A contained in the Appendix.

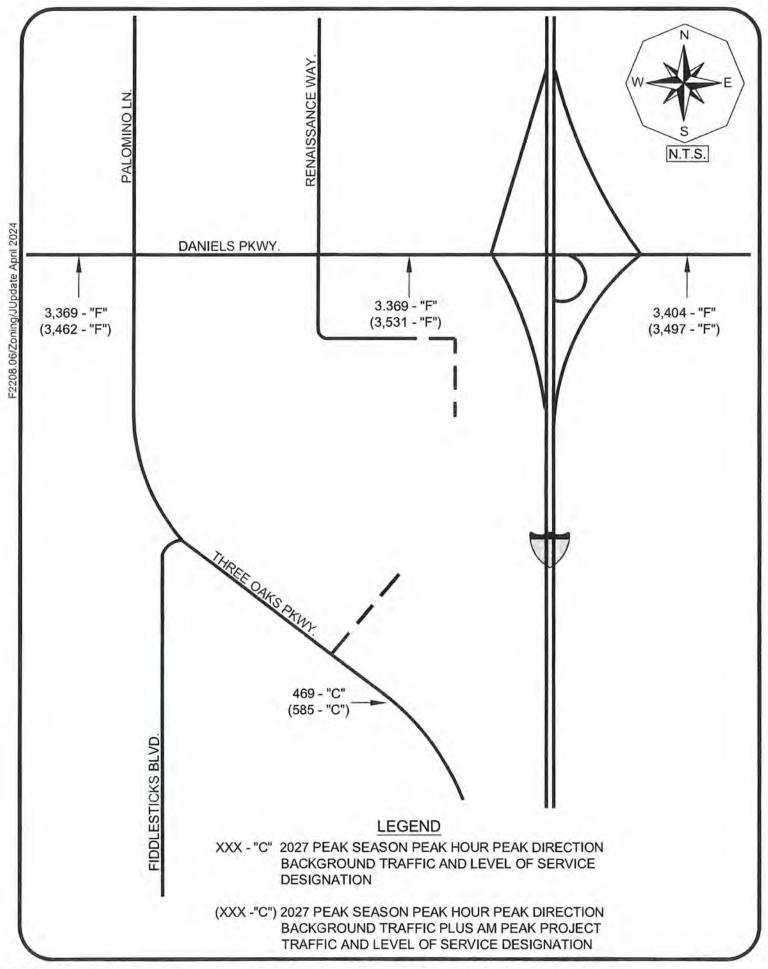





VII. PROJECTED LEVEL OF SERVICE AND IMPROVEMENTS

Adverse impacts are defined as a degradation of the Level of Service beyond the adopted Level of Service Thresholds for those links as indicated in Table 1A. In comparing the links' functional classification and calculated 2027 traffic volumes to the Service Volume Tables, it was determined that Daniels Parkway from to I-75 is projected to operate below the minimum recommended Level of Service in 2027 both with and without the proposed development. Three Oaks Parkway south of Daniels Parkway is shown to operate at LOS "C" in 2027 both with and without the project trips. As previously stated, Daniels Parkway as been designated as a "Constrained" facility by the Board of County Commissioners and the Level of Service is projected to be an issue prior to any of the project trips being added to the network, so the deficiency is not caused by the project. Therefore, no roadway capacity improvements will be warranted as a result of the additional traffic to be generated by the proposed development.

The updated Master Concept Plan indicates that access to the site will be provided to Daniels 9300 (the frontage road along Daniels Parkway) via an *ENTRANCE only*, only allowing site traffic to enter the site from Daniels Parkway. All traffic exiting the site will be required to exit the site to the south via the newly constructed Three Oaks Parkway extension. The Master Concept Plan also reflects an "Optional" accessway being provided to Indian Paint Lane, which currently does not exist along the western boundary of the site. Indian Paint Lane currently only exist further to the north near Daniels 9300. Should the Development choose to construct Indian Paint Lane within the easement provided and connect to Three Oaks Parkway, the access connection would be limited to right-in/right-out movements only. It is unlikely due to the circuitous nature of this route that site traffic would even utilize this accessway to access Three Oaks Parkway as the main access to Three Oaks Parkway would be a more direct access to the project. For this reason the "Optional" access drive is illustrated on the graphics but there is no site traffic assigned to this access drive at this time based on the Master Concept Plan. At the time of Local Development Order, should the site development plan change and a more direct



access to Three Oaks Parkway is provided that would allow site traffic to have a more direct access to the Three Oaks Parkway corridor, further evaluation of this connection will be made at that time and a turn lane analysis will be made at the time of Local Development Order, as will all of the other access connections, to determine what, if any, off-site turn lane improvements at the site access drive intersections will be required based on the Administrative Code requirements.

VIII. INTERSECTION ANALYSIS

Intersection analysis was conducted utilizing the latest version of the program SYNCHRO® to determine the operational characteristics of the signalized intersections of Daniels Parkway and Danport Boulevard and Daniels Parkway and I-75 southbound ramps as well as the future signalized intersection of Three Oaks Parkway and the site access drive intersection. The analysis was based on the projected 2027 weekday AM and PM peak hour traffic conditions both with and without the project traffic. Traffic counts were conducted between hours of 7:00 to 9:00 A.M. and 4:00 to 6:00 P.M. and adjusted to peak season conditions based on the FDOT Peak Season adjustment factors. The existing peak season traffic volumes were then increased by a growth rate factor to determine the projected 2027 background turning movement volumes. The volumes utilized for the intersection analysis can be found in the Appendix of this report in the Development of Future Year Background Turning Movement Volumes spreadsheets.

The volumes for Three Oaks Parkway south of Daniels Parkway were formulated by referencing the *Three Oaks Parkway Extension Design Project Traffic Analysis Report*, prepared by McCormick Taylor and dated April 2020. This report identified the projected 2025 volumes for the weekday AM and PM peak hours for Three Oaks Parkway at the future signalized intersection of Three Oaks Parkway and the site access to the Daniels Town Center project. These 2025 volumes were increased by two additional years to obtain the projected 2027 north/south through volumes on Three Oaks Parkway in order to complete the intersection analysis. This intersection was assumed to be signalized at



the build-out of the Daniels Town Center project, which is consistent with the analysis conducted in the report prepared by McCormick Taylor. Copies of the relevant pages of the Traffic Analysis Report for the Three Oaks Parkway Extension Design Project are included in the Appendix of this report for reference.

The improvements programmed by Lee County along Daniels Parkway were also included in the intersection analysis, consistent with the analysis conducted in the previously referenced *Design Project Traffic Analysis Report* prepared for Lee County Department of Transportation. Improvements included adding additional travel lanes to Daniels Parkway between the I-75 southbound ramp through the Fiddlesticks Boulevard intersection. FDOT is also programming improvements to the I-75 interchange with Daniels Parkway to coincide with the improvements to Daniels Parkway that are being made by Lee County. FDOT has a Design/Build project funded for construction beginning in FY 2025 for this improvement, but the PD&E Study for this project has yet to be completed to determine exactly what improvements will be constructed. Since those improvements are not yet determined, they were not accounted for in this analysis. **Table 4** summarizes the results of the intersection analysis.



Table 4
Peak Hour Intersection Level of Service Summary
Daniels Town Square

Intersection	Projected 2027 Background Conditions	Projected 2027 Background + Project Conditions			
	LOS	LOS			
Decials Disser/Deceased Disease	AM: LOS "E"	AM: LOS "E"			
Daniels Pkwy/Danport Blvd.	PM: LOS "F"	PM: LOS "F"			
D - '-1- Dl/I 75 CD D	AM: LOS "F"	AM: LOS "F"			
Daniels Pkwy/I-75 SB Ramp	PM: LOS "F"	PM: LOS "F"			
Three Oaks Pkwy/Daniels Town	N/A	AM: LOS "C"			
Center Access	N/A	PM: LOS "C"			

Based upon the results of the capacity analysis, as illustrated in Table 4, the signalized intersections along Daniels Parkway will experience significant levels of congestion in 2027 both with and without the project.

The results of the capacity analysis at the proposed site access drive intersection on Three Oaks Parkway indicate all movements to operate at an acceptable Level of Service in 2027 with the project traffic conditions. Copies of all the relevant **SYNCHRO**® summary sheets are included in the Appendix of this report for reference.



IX. CONCLUSION

The proposed zoning amendment in the southwest quadrant of the I-75/Daniels Parkway interchange to provide for an increase in commercial floor area and add in residential dwelling units will not have a significant impact on the surrounding roadway network. The construction of the Three Oaks Parkway Extension project will provide develop traffic the option to travel south to the Alico Road corridor without having to access Daniels Parkway. The zoning amendment as proposed is consistent with the goals and objectives of the Lee County Comprehensive Plan. Daniels Parkway west of I-75 has been designated as a "Constrained Facility" by the Board of County Commissioners. The Lee County Department of Transportation is providing additional capacity improvements to the segment of Daniels Parkway between I-75 and Apaloosa Lane as part of the Three Oaks Parkway Extension project and the Florida Department of Transportation is programming improvements to the I-75 interchange with Daniels Parkway.

The Alico Road Extension project, which is now funded by Lee County, will also provide some relief to the Daniels Parkway corridor as this will provide for another east/west route from the Lehigh Acres area to the I-75 corridor and points further west for the residents of Lehigh Acres. Currently, drivers must use either the Daniels Parkway or Lee Boulevard/Colonial Boulevard corridors to access I-75.

Turn lane improvements and site specific road improvements at the site access drive intersections will be evaluated at the time the project seeks a Local Development Order approval.

APPENDIX

TABLE 1A & 2A

TABLE 1A
PEAK DIRECTION PROJECT TRAFFIC VS. 10% LOS C LINK VOLUMES
DANIELS TOWN SQUARE REZONING

Revised 4-12-2024

TOTAL AM PEAK HOUR PROJECT TRAFFIC = 662 VPH IN= 198 OUT= 464

TOTAL PM PEAK HOUR PROJECT TRAFFIC = 652 VPH IN= 381 OUT= 271

PERCENT ROADWAY LOS A LOS B LOSC LOS D LOSE PROJECT PROJECT PROJ ROADWAY SEGMENT CLASS VOLUME VOLUME VOLUME VOLUME VOLUME TRAFFIC TRAFFIC LOS C 6LD 0 430 12% 1.8% Daniels Pkwy E. of Metro Pkwy. 3050 3180 3180 56 20% 93 3.0% E. of Six Mile Cypress 6LD 0 430 3050 3180 3180 E. of Palomino Ln. 8LD 0 540 3830 3940 3940 35% 162 4.2% E of 1-75 6LD 0 430 3050 3180 3180 20% 93 3.0% E. of Treeline Ave. 6LD 0 430 3050 3180 3180 15% 70 2.3% E. of Chamberlin Ave. 6LD 0 430 3050 3180 3180 15% 70 2.3% N. of Daniels Pkwy 4LD 0 250 1,840 1,960 1,960 3% 0.8% Treeline Ave. 14 2% 9 S. of Daniels Pkwy 4LD 0 270 1,970 2,100 2,100 0.5% 4LD 0 270 2% 9 0.5% S. of Terminal Access 1,970 2,100 2,100 6LF 0 5,500 3% 14 1-75 N. of Daniels Pkwy 3,360 4,580 6.080 0.3% S. of Daniels Pkwy 6LF 0 3,360 4,580 5,500 6,080 2% 9 0.2% Three Oaks Pkwy 4LD 0 250 1,840 1,960 1,960 25% 116 6.3% S. of Daniels Pkwy Six Mile Cypress Pkwy N. of Daniels Pkwy 4LD 0 270 1,970 2,100 2,100 5% 23 1.2% S. of Daniels Pkwy 4LD 0 270 1,970 2,100 2,100 10% 46 2.4%

^{*} The Level of Service thresholds were for all roadways were obtained from the Lee County Generalized Service Volume Table,

^{**} The Level of Service thresholds for I-75 were obtained from FDOT's Generalized Peak Hour Directional Volumes for Florida's Urbanized Areas Table 7

TABLE 2A LEE COUNTY TRAFFIC COUNTS AND CALCULATIONS DANIELS TOWN SQUARE REZONING

Revised 4-12-2024

TOTAL PROJECT TRAFFIC AM = 662 VPH IN = 198 OUT = 464

TOTAL PROJECT TRAFFIC PM = 652 VPH IN = 381 OUT = 271

							2021	2027	7					2027			2027		
							PK HR	PK HR PK S	SEASON		PERCENT			BCKGR	ND		BCKGR	IND	
		SITE/	BASE YR	LATEST	YRS OF	ANNUAL	PK SEASON	PEAK DIRE	CTION	V/C	PROJECT	AM PROJ	PM PROJ	+ AM PF	OJ	VIC	+ PM PF	COS	V/C
ROADWAY	SEGMENT	STATION	ADT	ADT	GROWTH. 1	RATE	PEAK DIR.2	VOLUME	LOS	Ratio	TRAFFIC	TRAFFIC	TRAFFIC	VOLUME	LOS	Ratio	VOLUME	LOS	Ratio
Daniels Pkwy	E. of Six Mile Cypress	31	60,700	65,800	4	2 04%	2,985	3,369	F	1.06	20%	93	76	3,462	F	1.09	3,445	F	1 08
	E. of Palomino Ln.	31	60,700	65,800	4	2.04%	2,985	3,369	C	0.86	35%	162	133	3,531	C	0.90	3,502	C	0 89
	E. of I-75	52	51,800	56,400	4	2.15%	2,996	3,404	F	1 07	20%	93	76	3,497	F	110	3,480	F	1 09
Three Oaks Pkwy	S of Daniels Pkwy ³							469	C	0 24	25%	116	95	585	С	0.30	564	C	0 29

¹ Annual Growth Rale was calculated utilizing AADT data from 2022 Lee County Traffic Count Report

² 2021 peak hour peak season peak direction traffic volumes were obtained from the 2022 Lee County Public Facilities Level of Service and Concurrency Report

³ Peak Hour Peak Season Volume for Three Oaks Pkwy south of Daniels Pkwy provided by Lee County in 2027 model run

LEE COUNTY GENERALIZED SERVICE VOLUMES TABLE

Lee County Generalized Peak Hour Directional Service Volumes Urbanized Areas


		Uninterr	upted Flow	Highway		
	-		Level of Se			
Lane	Divided	Α	В	С	D	E
1	Undivided	130	420	850	1,210	1,640
2	Divided	1,060	1,810	2,560	3,240	3,590
3	Divided	1,600	2,720	3,840	4,860	5,380
			Arterials			
lass I (40	0 mph or highe		peed limit)			
			Level of Se			
Lane	Divided	Α	В	С	D	E
1	Undivided	*	140	800	860	860
2	Divided	*	250	1,840	1,960	1,960
3	Divided	*	400	2,840	2,940	2,940
4	Divided	*	540	3,830	3,940	3,940
Lane 1 2	Divided Undivided Divided	A *	* *	330 710	710 1,590	
1	Undivided Divided Divided	*		330 710 1,150	710 1,590 2,450	780 1,660 2,500
1 2 3	Undivided Divided	* * * Control	* * * ed Access	330 710 1,150 1,580 Facilities	710 1,590	780 1,660 2,500
1 2 3 4	Undivided Divided Divided	* * * Control	* * *	330 710 1,150 1,580 Facilities	710 1,590 2,450	780 1,660 2,500
1 2 3	Undivided Divided Divided Divided	* * * Control	* * * ed Access Level of Se	330 710 1,150 1,580 Facilities	710 1,590 2,450 3,310	780 1,660 2,500 3,340
1 2 3 4	Undivided Divided Divided Divided Divided	* * * Controll	* * * ed Access Level of Se	330 710 1,150 1,580 Facilities	710 1,590 2,450 3,310	780 1,660 2,500 3,340 E 940
1 2 3 4 Lane	Undivided Divided Divided Divided Divided Undivided	* * * Controll A *	* * * ded Access Level of Sel B 160	330 710 1,150 1,580 Facilities vice C 880	710 1,590 2,450 3,310 D 940	780 1,660 2,500 3,340 E 940 2,100
1 2 3 4 Lane 1 2	Undivided Divided Divided Divided Divided Divided Undivided Divided	* * * Controll A * *	* * * ded Access Level of Se B 160 270	330 710 1,150 1,580 Facilities vice C 880 1,970 3,050	710 1,590 2,450 3,310 D 940 2,100	780 1,660 2,500 3,340 E 940 2,100
1 2 3 4 Lane 1 2	Undivided Divided Divided Divided Divided Divided Undivided Divided	* * * Controll A * *	ed Access Level of Se B 160 270 430 Collectors	330 710 1,150 1,580 Facilities vice C 880 1,970 3,050	710 1,590 2,450 3,310 D 940 2,100	780 1,660 2,500 3,340 E 940 2,100
1 2 3 4 Lane 1 2 3	Divided Divided Divided Divided Divided Divided Divided Undivided Divided Divided	Controll A * * A A *	* * * ded Access Level of Se B 160 270 430 Collectors Level of Se B *	330 710 1,150 1,580 Facilities vice C 880 1,970 3,050	710 1,590 2,450 3,310 D 940 2,100 3,180	780 1,660 2,500 3,340 E 940 2,100 3,180
1 2 3 4 Lane 1 2 3	Divided	Controll A * * *	* * ded Access Level of Ser B 160 270 430 Collectors Level of Ser	330 710 1,150 1,580 Facilities vice C 880 1,970 3,050	710 1,590 2,450 3,310 D 940 2,100 3,180	780 1,660 2,500 3,340 E 940 2,100 3,180
1 2 3 4 Lane 1 2 3	Divided	Controll A * * A A *	* * * ded Access Level of Se B 160 270 430 Collectors Level of Se B *	330 710 1,150 1,580 Facilities vice C 880 1,970 3,050 vice C	710 1,590 2,450 3,310 D 940 2,100 3,180 D 660	780 1,660 2,500 3,340 E 940 2,100 3,180 E 740

TRAFFIC DATA FROM THE LEE COUNTY PUBLIC FACILITIES LEVEL OF SERVICE AND CONCURRENCY REPORT

Table 21 b): Link-Level Service Volumes and LOS Table
Table 21 b) 2 of 7


9900 CHJ/100 COC COC COC COC COC COC COC COC COC C	EMETERY RD HAMBERLIN PKWY DOCONUT RD DOLLEGE PKWY DOLLEGE PKWY DOLLEGE PKWY DOLLOMAL BLVD DOLOMAL BLVD DOLOMAL BLVD DOMBAL BLVD DORSTTUNION BLVD DORSCREW RD	FROM BUCKINGHAM RD AIRPORT ENT WEST END McGREGOR BLVD WHISKEY CREEK DR SUMMERLIN RD MCGREGOR BLVD SUMMERLIN RD MCGREGOR BLVD SUMMERLIN RO DYNASTY DR SR 82 US 41 SH 78 (PANE ISLAND RD) US 41 THREE GALS POWY E OF 1-75 EEN HAL GREFIN BLVD	HIGGINS AVE DANIELS PKWY VIA VENETTO BLVD WINKLER RD WHISKEY CREEK DR SUMMERLIN RD US 41 SUMMERLIN RD US 41 SR 82 MILWAUKEE BLVD CONSTITUTION CIR UTLETON RD THREE OAKS PKWY	Maj. Col Maj. Col Maj. Col P Art P Art P Art P. Art P. Art P. Art P. Art Maj. Col Maj. Col	21N 4UN 2UN 6UD 6UD 6UD 6UD 6UD 6UD 6UD	LOS	CAPACITY 860 1,790 860 2,980 2,980 2,980 2,980 2,980 2,980 2,980 2,980	C C C D D D D D	VOL 308 105 268 2,292 2,059 2,059 1,898	0.36 0.06 0.31 0.77 0.69 0.69	CCCDDDD	323 150 420 2,409 2,164 2,164	V/C 0.38 0.08 0.49 0.81 0.73	Port Authority maintained Estero maintains to east
9900 CHJ/100 COC COC COC COC COC COC COC COC COC C	HAMBERUN PKWY DOONUT RD DOLLEGE PKWY DOLLEGE PKWY DOLLEGE PKWY DOLLEGE PKWY DOLLOMAL BLVD DOLLOMBUS BLVD D	AIRPORT ENT WEST END MCGREGOR BLVD WINKLER RD WHISKEY CREEK DR SUMMERLIN RD MCGREGOR BLVD SUMMERLIN RO DYNASTY DR SR 82 US 41 SR 73 (PINE ISLAND RD) U5 41 THREE CARS PICWY E OF 1-75	DANIELS PKWY VIA VENETTO BLVD WINKLER RD WHISKEY CREEK DR SUMMERLIN RD US 41 SUMMERLIN RD US 41 SA 82 MILWAUKEE BLVD CONSTITUTION CIR	Maj Col Maj Col P Art P Art P Art P Art P Art P Art P Art Maj Col	4UN 2UN 6UD 6UD 6UD 6UD 6UD 6UD		1,790 860 2,980 2,980 2,980 2,980 2,980	C C D D D D	105 268 2,292 2,059 2,059	0.06 0.31 0.77 0.69 0.69	C C D D D	150 420 2,409 2,164	0.08 0.49 0.81 0.73	
CONTROL CONT	DOONUT RD DOLLEGE PKWY DOLLEGE PKWY DOLLEGE PKWY DOLLOMAL BLVD DOLOMAL BLVD DOLOMAL BLVD DONSTITUTION BLVD DORSCREW RD	WEST END MCGREGOR BLVD WINKLER RD WHISKEY CREEK DR SUMMERLIN RD MCGREGOR BLVD SUMMERLIN RO DYMASTY DR S82 US 41 S8778 (PINE ISLAND RD) U5 41 THREE CARS PICWY E OF 1-75	WIA VENETTO BLVD WINKLER RD WHISKEY CREEK DR SUMMERLIN RD US 41 SUMMERLIN RD US 41 SA 82 MILWAUKEE BLVD CONSTITUTION CIR	Maj, Col P Art P Art P Art P Art P. Art P. Art P Art Maj Col	6LD 6LD 6LD 6LD 6LD 6LD 6LD		2,980 2,980 2,980 2,980 2,980	D D D	268 2,292 2,059 2,059	0.31 0.77 0.69 0.69	D D D	420 2,409 2,164	0.49 0.81 0.73	
100 COLO 200	DLLEGE PKWY DLLEGE PKWY DLLEGE PKWY DLLOMIAL BLVD DLOMIAL BLVD DRINGSCREW RD	MEGREGOR BLVD WINKLER RD WHISKEY CREEK DR SUMMERLIN RD MCGREGOR BLVD SUMMERLIN RO DYNASTY DR SR 82 US 41 SR 73 (PINE ISLAND RD) U5 41 THREE OARS PRWY E OF 1-75	WINKER RD WHISKEY CREEK DR SUMMERUN RD US 41 SUMMERUN RD US 41 SR 82 MILWAUKEE BLVD CONSTITUTION CIR	P Art Maj Col	6LD 6LD 6LD 6LD 6LD 6LD		2,980 2,980 2,980 2,980	D D	2,292 2,059 2,059	0.77 0.69 0.69	0 0	2,409 2,164	0.81 0.73	Estero maintains to east
200 COLOR COLOR CAPE CAPE CAPE CAPE CAPE CAPE CAPE CAPE	DELEGE PRWY DELEGE PRWY DELEGE PRWY DELOMIAL BLVD DELOMIAL	WINKLER RD WHISKEY CREEK DR SUMMERLIN RD MCGREGOR BLVD SUMMERLIN RO DYNASTY DR S8 82 US 41 S8 72 (PINE IS AND RO) U5 41 THREE OAKS PKWY E OF 1-75	WHISKEY CREEK DR SUMMERUN RD US 41 SUMMERUN RD US 41 SR 82 MILWAUKEE BLVD CONSTITUTION CIR	P Art P Art P Art P Art P Art P Art Maj Col	6D 6D 6D 6D 6D 6D		2,980 2,980 2,980	D D	2,059 2,059	0.69 0.69	D D	2,164	0.73	
3300 COL 5500 C	DELEGE PKWY DELEGE PKWY DELOMAL BLVD DELO	WHISKEY CREEK DR SUMMERLIN RD MCGREGOR BLVD SUMMERLIN RO DYNASTY DR SR 82 US 41 SR 75 (PINE IS AND RO) US 41 THREE OAKS PKWY E OF 1-75	SUMMERUN RD US 41 SUMMERUN RD US 41 SR 82 MILWAUKEE BLVD CONSTITUTION CIR	P Art P Art P Art P Art P Art Maj Col	6LD 6LD 6LD 6LD	H H H	2,980 2,980	D	2,059	0.69	D			
400 COL 500 COL 500 COL 200 COL 300 COL 400 CON 500 COR 500	DELEGE PKWY DELOMIAL BLVD DELOMIAL	SUMMERLIN RO MCGREGOR BLVD SUMMERLIN RO DYNASTY DR SR 82 US 41 SR 75 (PINNE ISLAND RD) US 41 THREE OAKS PRWY E OF 1-75	US 41 SUMMERUN RD US 41 SR 82 MILWAUKEE BLVD CONSTITUTION CIR	P Art P. Art P. Art P Art Maj Col	6LD 6LD 6LD	E	2,980		-,			2,164	0.72	
500 COL 500 COL 200 COL 200 COL 400 COL 500	DUDMAL BLVD DUDMAL BLVD DUDMAL BLVD DUDMAL BLVD DUDMAL BLVD DUSTRICTI RD DRESCREW RD	MCGREGOR BLVD SUMMERUN RO DYNASTY DR SR 82 US 41 SR 75 (PINNE ISLAND RD) US 41 THREE OAKS PRWY E OF 1-75	SUMMERLIN RD US 41 SR 82 MILWAUKEE BLVD CONSTITUTION CIR UTTLETON RD	P. Art P. Art P. Art Maj. Col	6LD 6LD	E		D	1,898			Vale	0.73	
500 COL 200 COL 200 COL 400 COL 400 COL 500 COR 500 CO	DUDNIAL BLVD DUDNIAL BLVD DUDNIAL BLVD DUSTITUTION BLVD DRESCREW RD DRISCREW RD DRITTY LAKES BLVD	SUMMERLIN RO DYNASTY DR SR 82 US 41 SR 78 (PINCEISLAND RD) US 41 THREE OAKS PRWY E OF 1-75	US 41 SR 82 MILWAUKEE BLVD CONSTITUTION CIR UTTLETON RD	P. Art P. Art Maj. Col	6LD 6LD		2,840		2040		D	1,995	0.67	
200 COL 3300 COL 400 COA 500 COA 500 COA 500 COA 500 COA 500 COA 500 COA 300 COA 300 CAY 400 CYP 500 CYP 500 CYP	OLOMAL BLVD ON STITUTION BLVD ON STITUTION BLVD ON SCREW RD	DYMASTY DR SR 82 US 41 SR 78 (PINE ISLAND RD) US 41 THREE DAKS PRWY E OF 1-75	SR 82 MILWAUKEE BLVD CONSTITUTION CIR	P. Art Maj. Col	6LD	- 5	2.040		3,049	107		3,204	1.13	7
300 COL 400 CON 500 COR 500 COR 700 COR 500 COR 100 COL 200 CRY 1400 CYP 500 CYP 500 CYP	DUMBUS BLVD DOSTITUTION BLVD DOSEST RO DOSESCREW RO	SR 82 US 41 SR 75 (PINC ISLAND RD) US 41 THREE CAKS PICWY E OF 1-75	MILWAUKEE BLVD CONSTITUTION CIR LITTLETON RD	Maj Col		-	2,840	D	2,650	0.93	0	2,785	0.98	
400 CON 500 COR 500 COR 500 COR 500 COR 500 COR 500 CRY 400 CYP 500 CYP 500 CYP	CHISTITUTION BLVD CORRECT RO COUNTRY LAKES BLVD	US 41 SR 78 (PINE ISLAND RD) 1/5 41 THREE CAKS PKWV E OF 1-75	CONSTITUTION CIR	100		D	3,040	В	2,070	0.68	C	2,175	0.72	pld count
500 COR 500 COR 500 COR 500 COR 500 COR 500 CRY 500 CYP 500 CYP	DRASCREW RD DUNTRY LAKES BLVD	SR 78 (PINE ISLAND RD) US 41 THREE CAKS PKWY E OF 1-75	UTILETON RD	maj. Col	2LN 2LN	E	860 860	C	100 217	0.12	C	105	0.12	
500 COP 500 COR 500 COR 500 COR 500 CRY 500 CYP 500 CYP	DRISCREW RD DRISCREW RD DRISCREW RD DRISCREW RD DRISCREW RD DRISCREW RD DUNTRY LAKES BLVD	US 41 THREE CARS PRWY E OF 1-75		Also Poli	ZUN	-	860	C	21/	0.25	0	245	0.26	old count projection(2010)
700 COR 800 COR 900 COR 100 COU 200 CRY 300 CRY 400 CYP 500 CYP	ORKSCREW RD ORKSCREW RD ORKSCREW RD ORKSCREW RD OUNTRY LAKES BLVD	THREE CAKS PKWY E OF 1-75	THIRD CANDELL DAY	P. Art	4LD	E	1,900	C	1,047	_	_	1,312	_	old court, added VA clinic 2006 Sallena at Corkscrew
800 COR 900 COR 100 COL 200 CRY 800 CRY 800 CYP 500 CYP	DRISCREW RD DRISCREW RD DRISCREW RD DUNTRY LAKES BLVD	E OF 1-75	W 0F 1-75	P. Art	4LD	E	1,900		200	1.12		2,368	1.25	Estero Crossing
900 COR 000 COR 100 COU 200 CRY 300 CRY 400 CYP 500 CYP	ORKSCREW RD ORKSCREW RD OUNTRY LAKES BLVD		BEN HILL GRIFFIN BLVD	P. Art	4LD	E	1,900	-	1.069	0.56	С	1,281	0.67	taken washing
000 COR 100 COU 200 CRY 300 CRY 400 CYP 500 CYP	DRKSCREW RD DUNTRY LAKES BLVD	AND RESIDENCE AN	ALICO RD	P. Art	4LD	E	1,960	è	1.186	0.61	Č	1,398	0.71	
100 COU 200 CRY 300 CRY 400 CYP 500 CYP	DUNTRY LAKES BLVD	ALICO RD	COUNTY LINE	P Art	2LN	E	1,140	c	464	0.41		1,244	1.09	EEPCO Study, The Place
200 CRY 300 CRY 400 CYP 500 CYP		LUCKETT RD	TICE ST	Maj. Col	2LN	E	860	c	143	0.17	С	293	0.34	old count projection(2010)
100 CYP 500 CYP 500 CYP	RYSTAL DR	US 41	METRO PKWY	Maj. Col	2LN	E	860	C	360	0.42	C	379	0.44	
500 CYP 500 CYP	RYSTAL DR	METRO PKWY	PLANTATION RD	Maj. Col	2UN	E	860	C	242	0.28	C	254	0.30	
500 CYP	PRESS LAKE DR	McGREGOR BLVD	SOUTH POINT BLVD	P. Art	4LD	E	1,940	D	1,129	0.58	D	1,185	0.61	
-	PRESS LAKE DR	SOUTH POINT BLVD	WINKLER RD	P Art	4LD	E	1,940	D	1,419	0.73	D	1,491	0.77	
700 CYP	PRESS LAKE DR	WINKLER RD	SUMMERUN RD	P Art	4LD	E	1,940	D	1,419	0.73	D	1,491	0.77	
	PRESS LAKE DR	SUMMERLIN RD	US 41	P Art	6LD	E	2,940	D	2,085	0.71	D	2,191	0.75	
BOO DAN	WIELS PKWY	US41	METRO PKWY	Controlled as	6LD	E	2,680	D	September 1	0.85		2,405	0.90	
	WIELS PKWY	METRO PKWY	SIX MILE PKWY	Controlled xs	6LD	E	2,680	D	A PROPERTY.	0.79		2,520	0.94	Constrained
	WIELSPKWY	SIX MILE PKWY	PALOMINO LN	Controlled xs	6LD	E	3,040	E	The state of	0.98		3,256		Constrained
	WIELS PKWY	PALOMINO LN	1-75	Controlled xs	6LD	E	3,040	E	2,985	0.98		3,137	1.03	Constrained
	WIELS PKWY	1-75	TREELINE AVE	Controlled as	6LD	E	3,260	В				3,149	0.97	
	WIELS PKWY	TREELINE AVE	CHAMBERUN PKWY	Controlled as	6LD		3,260	8	2,996	0.92		3,149	0.97	
	WIELS PKWY	CHAMBERUN PKWY GATEWAY BLVD	GATEWAY BLVD	Controlled xs	ALD	E	3,260 2,160	В	2,765	1.00	8	2,906	0.89	SKY Walk *
-	WILEY DR	US41	SR 82 METRO PKWY	Maj. Col	2LN	E	860	C	255	0.30	C	285	0.33	SAT WAR
	AVIS RD	McGREGOR BLVD	IONA RD	Maj. Col	2LN	E	860	c	15	0.02	C	29	0.03	old count projection(2010)
	L PRADO BLVD	CAPE CORAL PKWY	SE 46TH ST	P. Art	6LD	E	2,660	É	1404	0.53	C	1,586	0.60	old count projection(2009)
	1 FRADO BLYD	SE 46TH ST	CORONADO PKWY	P. Art	6LD	E	2,660	c	1.404	0.53	C	1.586	0.60	old count projection (2009)
	EL PRADO BLVD	CORONADO PKWY	CORNWALLIS PKWY	P. Art	6LD	Ē	2,660	0		0.70	D	1.964	0.74	on comit projection display
	I. PRADO BLVD	CORNWALLIS PKWY	CORAL POINT DR	P. Art	6LD	E	2,660	0	4	0.96		2,696	1.01	
	E PRADO BLVD	CORAL POINT DR	HANCOCK B. PKWY	P. Art	6LD	E	2,800	D	1,997	0.71	D	2,098	0.75	
	PRADIO BLVD	HANCOCK B. PKWY	SR 78	P. Art	6LD	E	2,800	C	1,642	0.59		1,725	0.62	
	L PRADO BLVD	US 41	SLATER RD	M Art	2LN	E	860	C	489	0.57	0	742	0.86	Crane Landing
00 EAS	ST 21ST ST	JOEL BLVD	GRANT AVE	Min. Col	2LN	E	860	C	31	0.04	C	33	0.04	
000 ESTE	TERO BLVD	BIG CARLOS PASS BRIDGE	PESCADORA AVE	M. Art	2LN	E	726	4	356	0.49	A	374	0.52	Constrained*
000 ESTE	TERO BLVD	PESCADORA AVE	VOORHIS ST	M. Art	2LN	E	726	8	602	0.83	C	633	0.87	Constrained*
000 ESTE	TERO BLVD	VIDORHIS ST	TROPICAL SHORES WAY	M. Art	ZLN	E	726	3		0.83	C	633	0.87	Constraines*
	TERO BLVD	TROPICAL SHORES WAY	CENTER ST	M. Art	2LN	E	671			107	_	779	1.16	Constrained, aid count(2010)
107 ESTE	TERO PKWY	US 41	THREE DAKS PKWY	P. Art	4LD	E	2,000	8	851	0.43	B	1,154	0.58	Not County Mented
		ed Collector Roadway - Un		Y	1									Inincorporated Lee County Aterial Facility
		The second secon	- 2 to 18 19 75 75 10 10 10 10 10 10 10 10 10 10 10 10 10						-,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	CONT.	3.50			THE RESIDENCE STORM

SITE TRAFFIC ASSIGNMENT SUPPLEMENTAL GRAPHICS FIGURES A-1 & A-2

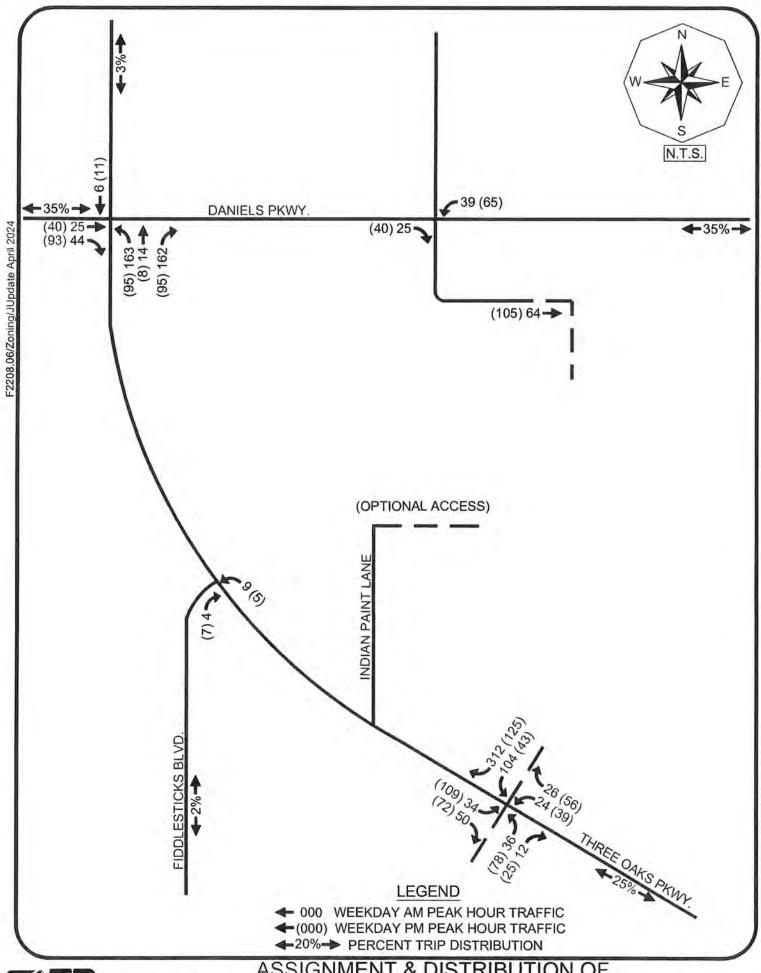



ASSIGNMENT & DISTRIBUTION OF NET NEW PROJECT TRIPS DANIELS TOWN CENTER

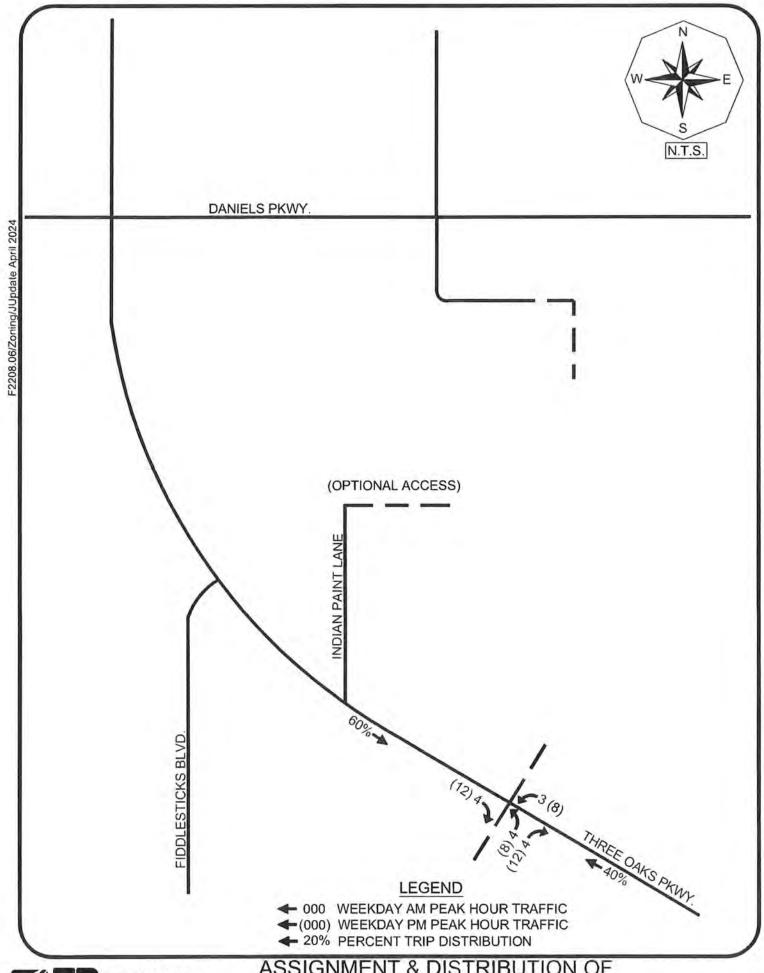



ASSIGNMENT & DISTRIBUTION OF PASS-BY PROJECT TRIPS DANIELS TOWN CENTER

TRAFFIC DATA FROM THE LEE COUNTY TRAFFIC COUNT REPORT

Updated 5/3/2023	Daily Traffic Volume (AADT)											
STREET	LOCATION	Station #	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022
DANIELS PKWY	W OF METRO PKWY	<u>30</u>	40100	46400	47400	48300	48300	49400	49900	41900	49300	49400
DANIELS PKWY	W OF PLANTATION RD	263		48000		47600						
DANIELS PKWY	E OF SIX MILE PKWY	<u>31</u>	53200	51800	53200	59700		60700	62500	54100	63100	65800
DANIELS PKWY	W OF I - 75	264	48700	51500	60600		52400					
DANIELS PKWY	E OF 1 - 75	<u>52</u>	44800	47100	44200		52600	51800	54500	48400	55800	56400
DANIELS PKWY	E OF TREELINE DR	32										
DANIELS PKWY	E OF CHAMBERLIN PKWY	48	35800	38100	37300	41900	45600	41400	41900	40600	46200	48600
DANIELS PKWY	W OF GATEWAY BLVD	89			35800	34500		35700	39000			
DANIELS PKWY	S OF IMMOKALEE RD	524	20600	28200	29000	33400	32100			37400	38700	41900
DANLEY RD	W OF METRO PKWY	518		4900		6300		6700		4500		7100
DEL PRADO BLVD	S OF BEACH PKWY	86							25500	25500		-
DEL PRADO BLVD	S OF CORNWALLIS PKWY	2	37100	37800	38300			40700	40700	36000	45800	42100
DEL PRADO BLVD	S OF FOUR MILE COVE RD	40	45800	46500	45600	46500	46400	45200	45100	40400	45000	45100
DEL PRADO BLVD	E OF US 41	443	4700	5400	6000	6600	7200	7800	7800	8800		9600
ESTERO BLVD	@ BIG CARLOS PASS BR.	274	9600				9400		10200			
ESTERO BLVD	N OF DENORA ST	44	13500	13500	12700	12400			11000	11400	13400	12200
ESTERO PKWY	W OF BEN HILL GRIFFIN PKW	459	15700		15800		19500		17400		12500	
ESTERO PKWY	E OF US 41	465	8200		11500		16200		15700		17100	
FIDDLESTICKS BLVD	S OF DANIELS PKWY	276		7200		7700		7800		7700		7000
FOWLER ST	E OF US 41	511		20700		23300		22100		18800		21700
FOWLER ST	S OF MORENO ST	28	21700	23000	24500	23700	24900	23900	27400	24800	27700	28700
FOWLER ST	S OF M.L.K. BLVD (SR 82)	119								14400	17400	17600

TRAFFIC DATA FROM THE FOOT FLORIDA TRAFFIC ONLINE

2021 PEAK SEASON FACTOR CATEGORY REPORT - REPORT TYPE: COUNTY CATEGORY: 1207 SR 876/ DANIELS RD

MEEN	DAMEC	CF	MOCF: 0.97
WEEK	DATES	SF	PSCF
1		0.97	1.00
2	01/03/2021 - 01/09/2021	1.01	1.04
3	01/10/2021 - 01/16/2021	1.05	1.08
4	01/17/2021 - 01/23/2021	1.04	1.07
5	01/24/2021 - 01/30/2021	1.02	1.05
6	01/31/2021 - 02/06/2021	1.01	1.04
7		1.00	1.03
	02/07/2021 - 02/13/2021		1.02
* 8	02/14/2021 - 02/20/2021	0.99	
* 9	02/21/2021 - 02/27/2021	0.98	1.01
*10		0.97	1.00
	03/07/2021 - 03/13/2021	0.96	0.99
*12	03/14/2021 - 03/20/2021	0.95	0.98
*13	03/21/2021 - 03/27/2021	0.95	0.98
*14	03/28/2021 - 04/03/2021	0.96	0.99
*15	04/04/2021 - 04/10/2021	0.96	0.99
*16	04/11/2021 - 04/17/2021	0.97	1.00
*17	04/18/2021 - 04/24/2021	0.98	1.01
*18	04/25/2021 - 05/01/2021	0.99	1.02
*19		0.99	1.02
	05/02/2021 - 05/08/2021		
*20	05/09/2021 - 05/15/2021	1.00	1.03
21	05/16/2021 - 05/22/2021	1.00	1.03
22	05/23/2021 - 05/29/2021	1.00	1.03
23	05/30/2021 - 06/05/2021	1.01	1.04
24	06/06/2021 - 06/12/2021	1.01	1.04
25	06/13/2021 - 06/19/2021	1.01	1,04
26	06/20/2021 - 06/26/2021	1.02	1.05
27	06/27/2021 - 07/03/2021	1.03	1.06
28	07/04/2021 - 07/10/2021	1.04	1.07
29	07/11/2021 - 07/17/2021	1.05	1.08
30	07/18/2021 - 07/24/2021	1.05	1.08
31	07/25/2021 - 07/31/2021	1.05	1.08
32	08/01/2021 - 08/07/2021	1.05	1.08
33		1.05	1.08
	08/08/2021 - 08/14/2021		1.09
34	08/15/2021 - 08/21/2021	1.06	
	08/22/2021 - 08/28/2021	1.05	1.08
36	08/29/2021 - 09/04/2021	1.05	1.08
37	09/05/2021 - 09/11/2021	1.05	1.08
38	09/12/2021 - 09/18/2021	1.05	1.08
39	09/19/2021 - 09/25/2021	1.03	1,06
40	09/26/2021 - 10/02/2021	1.02	1.05
41	10/03/2021 - 10/09/2021	1.00	1.03
42	10/10/2021 - 10/16/2021	0.99	1.02
43	10/17/2021 - 10/23/2021	0.98	1.01
44	10/24/2021 - 10/30/2021	0.98	1.01
45	10/31/2021 - 11/06/2021	0.98	1.01
46	11/07/2021 - 11/13/2021	0.98	1.01
47	11/14/2021 - 11/20/2021	0.98	1.01
48	11/21/2021 - 11/27/2021	0.97	1.00
49		0.97	1.00
	11/28/2021 - 12/04/2021		
50	12/05/2021 - 12/11/2021	0.97	1.00
51	12/12/2021 - 12/18/2021	0.97	1.00
52	12/19/2021 - 12/25/2021	1.01	1.04
53	12/26/2021 - 12/31/2021	1.05	1.08

^{*} PEAK SEASON

TURNING MOVEMENT COUNT DANIELS PKWY @ DANPORT BLVD

Daniels Pkwy @ Danport Blvd 9-6-22 AM

File Name: Daniels Pkwy @ Danport Blvd 9-6-22 AM

Location:

Cars and Peds

Site Code:


Study Date: 09/06/2022


				rt Blvd bound						s Pkwy bound					Danpo North	rt Blvd bound						iels Pkwy stbound			
Time	Peds	Right	Thru	Left	U- Turn	Appr Total	Peds	Right	Thru	Left	U- Turn	Appr Total	Peds	Right	Thru	Left	U- Turn	Appr Total	Peds	Right	Thru	Left	U-Turn	Appr Total	Int Tota
07:00		5	3	33	0	41		30	367	8	43	448		23	0	2	0	25		16	587	7	0	610	1124
07:15		2	6	38	0	46		23	378	16	54	471		14	3	8	0	25		16	660	14	0	690	1232
07:30		10	1	19	0	30		14	444	5	43	506		14	1	5	0	20		17	667	12	0	696	1252
07:45		5	1	27	0	33		25	457	16	41	539		20	0	7	0	27	a F	8	641	11	0	660	1259
Total	0	22	11	117	0	150	0	92	1646	45	181	1964	0	71	4	22	0	97	0	57	2555	44	0	2656	4867
08:00		14	1	18	0	33		23	429	18	38	508		20	0	7	0	27		9	664	10	2	685	1253
08:15		10	0	15	0	25		28	419	22	26	495		27	1	6	0	34		25	610	15	0	650	1204
08:30		13	0	12	0	25		27	503	15	41	586		26	0	8	0	34		16	613	20	0	649	1294
08:45		15	5	22	0	42		27	581	22	36	666	1 19	17	2	17	0	36		24	551	18	1	594	1338
Total	0	52	6	67	0	125	0	105	1932	77	141	2255	0	90	3	38	0	131	0	74	2438	63	3	2578	5089
Grand Total	0	74	17	184	Ō	275	0	197	3578	122	322	4219	o.	161	7	60	0	228	0	131	4993	107	3	5234	9956
Appr		26.9	6.2	66.9	0			4.7	84.8	2.9	7.6			70.6	3.1	26.3	0			2.5	95.4	2	0.1		
Total %		0.7	0.2	1.8	0			2	35,9	1.2	3.2			1.6	0.1	0.6	0			1.3	50.2	1.1	0		
AM Pk Hr		08:00	08:00	08:00	08:00	08:00		08:00	08:00	08:00	08:00	08:00		08:00	08:00	08:00	08:00	08:00		08:00	08:00	08:00	08:00	08:00	08:00
AM Pk Vol		52	6	67	0	125		105	1932	77	141	2255		90	3	38	0	131		74	2438	63	3	2578	5089
AM		0.867	0.300	0.761	NaN	0.744		0.938	0.831	0.875	0.860	0.846		0.833	0.375	0.559	NaN	0.910		0.740	0.918	0.788	0.375	0.941	0.951

Daniels Pkwy @ Danport Blvd 9-6-22 AM


File Name: Daniels Pkwy @ Danport Blvd 9-6-22 AM

Location: Site Code: Study Date: 09/06/2022





AM Peak Hour Statistics AM Peak Hour Begins: 08:00 AM Peak Hour Volume: 5089 AM Peak Hour Factor: 0.951





Daniels Pkwy @ Danport Blvd 9-6-22 PM

File Name: Daniels Pkwy @ Danport Blvd 9-6-22 PM

Location:

Cars and Peds

Site Code:


Study Date: 09/06/2022


			Danpo South						Daniels Westl							rt Blvd bound						els Pkwy stbound	,		
Time	Peds	Right	Thru	Left	U- Turn	Appr Total	Peds	Right	Thru	Left	U- Turn	Appr Total	Peds	Right	Thru	Left	U- Turn	Appr Total	Peds	Right	Thru	Left	U-Turn	Appr Total	Int Tota
16:00		19	0	34	0	53		15	487	11	1	514		27	1	4	0	32		10	681	5	0	696	1295
16:15		12	0	25	0	37		21	552	9	3	585		18	2	5	0	25		11	734	7	0	752	1399
16:30		19	2	31	0	52		25	591	19	0	635		36	2	10	0	48		16	691	3	2	712	1447
16:45		14	1	55	0	70		23	617	7	4	651		32	4	10	0	46		16	742	17	0	775	1542
Total	0	64	3	145	0	212	0	84	2247	46	8	2385	0	113	9	29	0	151	0	53	2848	32	2	2935	5683
17:00		12	3	41	0	56		18	598	15	5	636		27	0	8	0	35		14	708	8	1	731	1458
17:15		18	2	32	0	52		13	527	15	6	561		17	2	11	0	30		13	707	12	0	732	1375
17:30		20	0	26	0	46		29	577	15	4	625		24	3	5	0	32		17	744	13	1	775	1478
17:45		19	3	35	0	57		25	508	13	1	547		25	5	8	0	38		19	639	17	2	677	1319
Total	0	69	8	134	0	211	0	85	2210	58	16	2369	0	93	10	32	0	135	0	63	2798	50	4	2915	5630
Grand Total	0	133	11	279	0	423	0.	169	4457	104	24	4754	0	206	19	61	0	286	0	116	5646	82	6	5850	11313
Appr %		31.4	2.6	66	0			3,6	93.8	2.2	0.5			72	6.6	21.3	0			2	96.5	1.4	0.1		
Total %		1.2	0.1	2.5	0			1.5	39.4	0.9	0.2			1.8	0.2	0.5	0			1	49.9	0.7	0.1		
PM Pk Hr		16:45	16:45	16:45	16:45	16:45		16:45	16:45	16:45	16:45	16:45		16:45	16:45	16:45	16:45	16:45		16:45	16:45	16:45	16:45	16:45	16:45
PM Pk Vol		64	6	154	0	224		83	2319	52	19	2473		100	9	34	0	143		60	2901	50	2	3013	5853
PM PHF		0.800	0.500	0.700	NaN	0.800		0.716	0.940	0.867	0.792	0.950		0.781	0.563	0.773	NaN	0,777		0.882	0.975	0.735	0.500	0,972	0.949

Daniels Pkwy @ Danport Blvd 9-6-22 PM


File Name: Daniels Pkwy @ Danport Blvd 9-6-22 PM

Location: Site Code: Study Date: 09/06/2022





PM Peak Hour Statistics PM Peak Hour Begins: 16:45 PM Peak Hour Volume: 5853 PM Peak Hour Factor: 0.949





TURNING MOVEMENT COUNT DANIELS PKWY @ I-75 SB RAMP

Daniels Pkwy @ W. Side of I-75 9-6-22 AM

File Name: Daniels Pkwy @ W. Side of I-75 9-6-22 AM

Location:

Cars and Peds

Site Code:


Study Date: 09/06/2022


			J- South						Daniel: Westi	s Pkwy oound					J- North	75 bound						iels Pkwy stbound			
Time	Peds	Right	Thru	Left	U- Turn	Appr Total	Peds	Right	Thru	Left	U- Turn	Appr Total	Peds	Right	Thru	Left	U- Turn	Appr Total	Peds	Right	Thru	Left	U-Turn	Appr Total	Int Tota
07:00		15	1	26	0	42		0	420	193	0	613						0		305	338	0	0	643	1298
07:15		23	0	32	0	55		0	461	208	0	669						0		311	397	0	0	708	1432
07:30		27	0	42	0	69		0	477	176	0	653						0		334	381	0	0	715	1437
07:45		40	0	28	0	68		0	502	188	0	690						0		309	380	0	0	689	1447
Total	0	105	1	128	0	234	0	0	1860	765	0	2625	0	0	0	D	0	0	0	1259	1496	0	0	2755	5614
08:00		37	0	39	0	76		0	516	181	0	697						0		299	399	0	0	698	1471
08:15		53	0	50	0	103		0	491	168	0	659						0		294	364	0	0	658	1420
08:30		54	1	61	0	116		8	522	158	0	688						0		302	344	0	0	646	1450
08:45		86	0	61	0	147		0	564	147	0	711						0		277	323	.0	0	600	1458
Total	0	230	1	211	0	442	0	8	2093	654	0	2755	0	0	0	0	0	0	0	1172	1430	0	0	2602	5799
Grand Total	0	335	2	339	0	676	0	8	3953	1419	0	5380	0	0	0	0	0	0	0	2431	2926	0	0	5357	11413
Appr		49.6	0.3	50.1	0			0.1	73.5	26.4	0			-2	-2	-2	-2			45.4	54.6	0	0		
Total %		2.9	0	3	0			0.1	34.6	12.4	0			0	0	0	0			21.3	25.6	0	0		
AM Pk Hr		08:00	08:00	08:00	08:00	08:00		08:00	08:00	08:00	08:00	08:00		08:00	08:00	08:00	08:00	08:00		08:00	08:00	08:00	08:00	08:00	08:00
AM Pk Vol		230	1	211	0	442		8	2093	654	0	2755		0	0	0	0	0		1172	1430	0	0	2602	5799
AM PHF		0.669	0.250	0.865	NaN	0.752		0.250	0.928	0.903	NaN	0.969		NaN	NaN	NaN	NaN	NaN		0.970	0.896	NaN	NaN	0.932	0.986

Daniels Pkwy @ W. Side of I-75 9-6-22 AM


File Name: Daniels Pkwy @ W. Side of I-75 9-6-22 AM

Location: Site Code: Study Date: 09/06/2022





AM Peak Hour Statistics AM Peak Hour Begins: 08:00 AM Peak Hour Volume: 5799 AM Peak Hour Factor: 0.986





Daniels Pkwy @ W. Side of I-75 9-6-22 PM

Daniels Pkwy @ W. Side of I-75 9-6-22 PM File Name:

Location:

Cars and Peds

Site Code:


Study Date: 09/06/2022


			J- South						Daniels Westl							75 bound						iels Pkwy stbound			
Time	Peds	Right	Thru	Left	U- Turn	Appr Total	Peds	Right	Thru	Left	U- Turn	Appr Total	Peds	Right	Thru	Left	U- Turn	Appr Total	Peds	Right	Thru	Left	U-Turn	Appr Total	Int Tota
16:00		76	0	41	0	117		0	438	94	0	532						0		126	644	0	0	770	1419
16:15		92	0	46	0	138		0	490	96	0	586						0		120	655	0	0	775	1499
16:30		107	1	43	0	151		0	529	104	0	633						0		135	638	0	0	773	1557
16:45		105		57	0	162		0	587	92	0	679						0		116	733	0	0	849	1690
Total	0	380	1	187	0	568	0	0	2044	386	0	2430	0	0	0	0	0	0	0	497	2670	0	0	3167	6165
17:00		94	0	44	0	138		0	562	110	0	672						0		123	710	0	0	833	1643
17:15		88	0	42	0	130		0	482	103	0	585						0		113	691	0	0	804	1519
17:30		80	0	39	0	119		0	533	92	0	625						0		112	739	0	0	851	1595
17:45		69	0	43	0	112		0	476	85	0	561						0		109	697	0	0	806	1479
Total	0	331	0	168	0	499	0	0	2053	390	0	2443	0	0	0	0	0	0	0	457	2837	0	0	3294	6236
Grand Total	0	711	1	355	0	1067	0	0	4097	776	0	4873	0	0	0	0	0	0	0	954	5507	0	0	6461	12401
Appr		66.6	0.1	33.3	0			0	84.1	15.9	0			-2	-2	-2	-2			14.8	85.2	0	0		
Total %		5.7	0	2.9	0			0	33	6.3	0			0	0	0	0			7.7	44,4	0	0		
PM Pk Hr		16:45	16:45	16:45	16:45	16:45		16:45	16:45	16:45	16:45	16:45		16:45	16:45	16:45	16:45	16:45		16:45	16:45	16:45	16:45	16:45	16:45
PM Pk Vol		367	0	182	0	549		0	2164	397	0	2561		0	0	0	0	0		464	2873	0	0	3337	6447
PM PHF		0.874	NaN	0.798	NaN	0.847		NaN	0.922	0.902	NaN	0.943		NaN	NaN	NaN	NaN	NaN		0.943	0.972	NaN	NaN	0.980	0.954

Daniels Pkwy @ W. Side of I-75 9-6-22 PM


File Name: Daniels Pkwy @ W. Side of I-75 9-6-22 PM

Location: Site Code: Study Date: 09/06/2022





PM Peak Hour Statistics PM Peak Hour Begins: 16:45 PM Peak Hour Volume: 6447 PM Peak Hour Factor: 0.954





DEVELOPMENT OF FUTURE YEAR BACKGROUND TURNING VOLUMES

Development of Future Year Background Turning Volumes

Intersection Count Date Build-Out Year Daniels Pkwy @ Danport Blvd. September 6, 2022 2027

							AM Pe	ak Hour						
	NBL	NBT	NBR	SBL	SBT	SBR	EBU	EBL	EBT	EBR	WBU	WBL	WBT	WBR
RAW Turning Movement Counts	38	3	90	67	6	52	3	63	2,438	74	141	77	1,923	105
Peak Season Correction Factor	1.08	1.08	1.08	1.08	1.08	1.08	1.08	1.08	1.08	1.08	1.08	1.08	1 08	1.08
Current Peak Season Volumes	41	3	97	72	6	56	3	68	2,633	80	152	83	2,077	113
Growth Rate							4.11%	4.11%	4.11%	4.11%	4.11%	4.11%	4.11%	4.11%
Years to Build-out	5	5	5	5	5	5	5	5	5	5	5	5	5	5
2027 Background Turning Volumes	41	3	97	72	6	56	4	83	3,220	98	186	102	2,540	138
Project Turning Volumes										25		39		
2027 Background + Project	41	3	97	72	6	56	4	83	3,220	123	186	141	2,540	138
							PM Pe	ak Hour						
	NBL	NBT	NBR	SBL	SBT	SBR	EBU	EBL	EBT	EBR	WBU	WBL	WBT	WBR
RAW Turning Movement Counts	34	9	100	154	6	64	2	50	2,901	60	19	52	2,319	83
Peak Season Correction Factor	1.08	1.08	1.08	1.08	1.08	1.08	1.08	1.08	1.08	1.08	1.08	1.08	1.08	1.08
Current Peak Season Volumes	37	10	108	166	6	69	2	54	3,133	65	21	56	2,505	90
Growth Rate	1.67						4 11%	4 11%	4.11%	4 11%	4.11%	4.11%	4.11%	4.11%
Years to Build-out	5	5	5	5	5	5	5	5	5	5	5	5	5	5
2027 Background Turning Volumes	37	10	108	166	6	69	2	66	3,832	80	26	68	3,064	110
Project Turning Volumes							11.6			40		45		
2027 Background + Project	37	10	108	166	6	69	2	66	3,832	120	26	113	3,064	110

Development of Future Year Background Turning Volumes

Intersection Count Date Build-Out Year Daniels Pkwy @ I-75 SB Ramp September 6, 2022

2027

							AM Peak Hour					
	NBL	NBT	NBR	SBL	SBT	SBR	EBL	EBT	EBR	WBL	WBT	WBR
RAW Turning Movement Counts				211	1	230		1,430	1,172	654	2,093	
Peak Season Correction Factor				1.08	1.08	1.08		1.08	1.08	1.08	1.08	
Current Peak Season Volumes				228	1	248		1,544	1,266	706	2,260	
Growth Rate				4.11%	4.11%	4.11%		4.11%	4.11%	4.11%	4.11%	
Years to Build-out				5	5	4		5	5	5	5	
2027 Background Turning Volumes				279	1	293		1,888	1,548	864	2,764	
Project Turning Volumes				1		6		15	30	-	6	
2027 Background + Project	1.			279	1	299		1,903	1,578	864	2,770	
							PM Peak Hour				*	
	NBL	NBT	NBR	SBL	SBT	SBR	EBL	EBT	EBR	WBL	WBT	WBR
RAW Turning Movement Counts				182	0	367		2,873	464	397	2,164	-
Peak Season Correction Factor				1.08	1.08	1.08		1.08	1.08	1.08	1.08	
Current Peak Season Volumes				197	0	396		3,103	501	429	2,337	
Growth Rate				4.11%	4 11%	4.11%		4.11%	4.11%	4.11%	4.11%	
Years to Build-out				5	5	5		5	5	5	5	
2027 Background Turning Volumes				241	0	484		3,795	613	525	2,858	
Project Turning Volumes				1		15		10	11		30	
2027 Background + Project				241	0	499		3,805	624	525	2,888	

Development of Future Year Background Turning Volumes

Intersection Count Date **Build-Out Year** Three Oaks Pkwy @ Daniels Town Center

2027

	NBL	NBT	NBR	SBL	SBT	SBR	AM Pea	ak Hour	EBT	EBR	WBL	WBT	WBR
RAW Turning Movement Counts Peak Season Correction Factor													
Current Peak Season Volumes													
Growth Rate				1									
ears to Build-out													
2027 Background Turning Volumes	0	354	0	0	332	0	0	0	0	0	0		0
Project Turning Volumes	27		26	34		54	40			16	104		312
2027 Background + Project	27	354	26	34	332	54	40	0	0	16	104		312
							PM Per	ak Hour					
	NBL	NBT	NBR	SBL	SBT	SBR	EBL		EBT	EBR	WBL	WBT	WBR
AW Turning Movement Counts						200	-						
eak Season Correction Factor													
current Peak Season Volumes													
Growth Rate													
rears to Build-out											1		
2027 Background Turning Volumes	0	407	0	0	308	0	0	0	0	0	0		0
Project Turning Volumes	47		56	109		84	86			37	43		125
2027 Background + Project	40	407	56	122	308	106	101	0	0	37	43		125

TRIP GENERATION COMPARISON EXISTING ZONING VS. PROPOSED ZONING

TRIP GENERATION COMPARISON EXISTING ZONING VS. PROPOSED ZONING DANIELS TOWN CENTER

Table 1 Approved Land Uses Per Z-08-043

Land Use	Size
Retail	250,000 square feet
Office	90,000 square feet
Medical Office	50,000 square feet
Hotel	120 Rooms

Table 2
Proposed Land Uses
Daniels Town Square

Land Use	Size
Retail	30,000 square feet
Multi-Family Dwelling Units	1,251 Units
Hotel	200 Rooms

Table 3
Trip Generation – Approved Uses
Per Z-08-043

Taxab III.	Weekda	y A.M. Pe	ak Hour	Weekd	ay P.M. Po	eak Hour	Daily
Land Use	In	Out	Total	In	Out	Total	(2-way)
Shopping Center (250,000 Sq. Ft.)	174	107	281	524	568	1,092	12,391
Office (90,000 Sq. Ft.)	135	18	153	26	126	152	1,059
Medical Office (50,000 Sq. Ft.)	102	27	129	60	140	200	2,040
Hotel (120 Rooms)	29	24	53	31	30	61	877
Total Trips	440	176	616	641	864	1,505	16,367

Table 4
Trip Generation – Total Trips
Daniels Town Square

T 4 TT	Weekda	y A.M. Pe	ak Hour	Weekd	ay P.M. Pe	eak Hour	Daily
Land Use	In	Out	Total	In	Out	Total	(2-way)
Shopping Center (30,000 Sq. Ft.)	36	23	59	85	85	170	1,496
Multi-Family (1,251 Units)	124	415	539	298	190	488	5,921
Hotel (200 Rooms)	52	41	93	61	59	120	1,744
Total Trips	212	479	691	444	334	778	9,161

Table 5
Trip Generation – Net New Trips Approved Uses
Per Z-08-043

		* ** *	2-00-043				
T A TY-	Weekda	ay A.M. Pe	ak Hour	Weekd	ay P.M. Pe	eak Hour	Daily
Land Use	In	Out	Total	In	Out	Total	(2-way)
Retail (250,000 Sq. Ft)	174	107	281	524	568	1,092	12,391
Office (90,000 Sq. Ft.)	135	18	153	26	126	152	1,059
Medical Office (50,000 Sq. Ft.)	102	27	129	60	140	200	2,040
Hotel (120 Room)	29	24	53	31	30	61	877
Total	440	176	616	641	864	1,505	16,367
Less Internal Capture	-36	-36	-72	-63	-63	-126	-1,309
Less Pass-By Trips	-42	-41	-83	-160	-161	-267	-3,643
Net New Trips	362	99	461	418	640	1,058	11,415

Table 6
Trip Generation – Net New Trips
Daniels Town Square

T and Title.	Weekda	ay A.M. Pe	ak Hour	Weekd	ay P.M. Pe	ak Hour	Daily
Land Use	In	Out	Total	In	Out	Total	(2-way)
Retail (30,000 Sq. Ft)	36	23	59	85	85	170	1,496
Multi-Family (1.251 Units)	124	415	539	298	190	488	5,921
Hotel (200 Room)	52	41	93	61	59	120	1,744
Total	212	479	691	444	334	778	9,161
Less Internal Capture	-7	-7	-14	-43	-43	-86	-1,007
Less Pass-By Trips	-7	-8	-15	-20	-20	-40	-448
Net New Trips	198	464	662	381	271	652	7,706

INTERNAL CAPTURE ESTIMATES PROPOSED ZONING

	NCHRP 684 Internal Trip	Capture Estimation Tool	
Project Name:	Daniels Town Center	Organization:	
Project Location:		Performed By:	
Scenario Description:		Date:	
Analysis Year:		Checked By:	
Analysis Period:	AM Street Peak Hour	Date:	

Land Use	Developme	ent Data (For Info	rmation Only)		Estimated Vehicle-Trips3	
Land Ose	ITE LUCs1	Quantity	Units	Total	Entering	Exiting
Office				0		
Retail	822			59	36	23
Restaurant				0		
Cinema/Entertainment	-1			0		
Residential	221			539	124	415
Hotel	310			93	52	41
All Other Land Uses ²				0		
				691	212	479

		Table 2-A:	Mode Split and Vehicle	Occupancy Estimates	S		
Land Use	Entering Trips			Exiting Trips			
Land Ose	Veh. Occ.4	% Transit	% Non-Motorized	Veh. Occ.4	% Transit	% Non-Motorized	
Office							
Retail							
Restaurant							
Cinema/Entertainment							
Residential							
Hotel							
All Other Land Uses ²							

Table 3-A: Average Land Use Interchange Distances (Feet Walking Distance)										
Orlein /F		Destination (To)								
Origin (From)	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel				
Office						Statement .				
Retail		100								
Restaurant										
Cinema/Entertainment										
Residential										
Hotel	10000000									

		Table 4-A: I	nternal Person-Tri	p Origin-Destination Matrix*		
0.1.1.25				Destination (To)		
Origin (From)	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office		0	0	0	0	0
Retail	0		0	0	2	0
Restaurant	0	0		0	0	0
Cinema/Entertainment	0	0	0		0	0
Residential	0	4	0	0		0
Hotel	0	1	0	0	0	

Table 5-A: Computations Summary									
	Total	Entering	Exiting						
All Person-Trips	691	212	479						
Internal Capture Percentage	2%	3%	1%						
External Vehicle-Trips ⁵	677	205	472						
External Transit-Trips ⁶	0	0	0						
External Non-Motorized Trips ⁶	0	0	0						

Table 6-A: Internal Trip Capture Percentages by Land Use								
Land Use	Entering Trips	Exiting Trips						
Office	N/A	N/A						
Retail	14%	9%						
Restaurant	N/A	N/A						
Cinema/Entertainment	N/A	N/A						
Residential	2%	1%						
Hotel	0%	2%						

¹Land Use Codes (LUCs) from *Trip Generation Manual*, published by the Institute of Transportation Engineers.

²Total estimate for all other land uses at mixed-use development site is not subject to internal trip capture computations in this estimator.

Enter trips assuming no transit or non-motorized trips (as assumed in ITE Trip Generation Manual).

Enter vehicle occupancy assumed in Table 1-A vehicle trips. If vehicle occupancy changes for proposed mixed-use project, manual adjustments must be made to Tables 5-A, 9-A (O and D). Enter transit, non-motorized percentages that will result with proposed mixed-use project complete.

⁵Vehicle-trips computed using the mode split and vehicle occupancy values provided in Table 2-A.

⁶Person-Trips

*Indicates computation that has been rounded to the nearest whole number

Estimation Tool Developed by the Texas A&M Transportation Institute - Version 2013.1

	NCHRP 684 Internal Trip	Capture Estimation Tool	
Project Name:	Daniels Town Center	Organization:	
Project Location:		Performed By:	
Scenario Description:		Date:	
Analysis Year:	Transaction of the control of	Checked By:	
Analysis Period:	PM Street Peak Hour	Date:	

Land Use	Developme	ent Data (For Info	rmation Only)		Estimated Vehicle-Trips ³	
Land OSE	ITE LUCs1	Quantity	Units	Total	Entering	Exiting
Office				0		
Retail	822			170	85	85
Restaurant				0		
Cinema/Entertainment				0		
Residential	221			488	298	190
Hotel	320			120	61	59
All Other Land Uses ²	71 7			0		
			V. 1	778	444	334

		Entering Tr	ips	Exiting Trips		
Land Use	Veh. Occ.4	% Transit	% Non-Motorized	Veh. Occ.4	% Transit	% Non-Motorized
Office						
Retail						
Restaurant						
Cinema/Entertainment						
Residential						
Hotel						
All Other Land Uses ²						

	Table :	3-P: Average L	and Use Interchan	ge Distances (Feet Walking D	istance)				
October (Ferror)	Destination (To)								
Origin (From)	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel			
Office	S								
Retail									
Restaurant			N						
Cinema/Entertainment									
Residential									
Hotel				/					

		Table 4-P: I	nternal Person-Tri	p Origin-Destination Matrix*				
Origin (From)		Destination (To)						
	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel		
Office		0	0	0	0	0		
Retail	0		0	0	22	4		
Restaurant	0	0		0	0	0		
Cinema/Entertainment	0	0	0		0	0		
Residential	0	9	0	0		6		
Hotel	0	2	0	0	0	X		

Table 5-P:	Computatio	ns Summary	
	Total	Entering	Exiting
All Person-Trips	778	444	334
Internal Capture Percentage	11%	10%	13%
External Vehicle-Trips ⁵	692	401	291
External Transit-Trips ⁶	0	0	0
External Non-Motorized Trips ⁶	0	0	0

Table 6-P: Internal	Trip Capture Percentag	ges by Land Use	
Land Use	Entering Trips	Exiting Trips	
Office	N/A	N/A	
Retail	13%	31%	
Restaurant	N/A	N/A	
Cinema/Entertainment	N/A	N/A	
Residential	7%	8%	
Hotel	16%	3%	

Land Use Codes (LUCs) from Trip Generation Manual, published by the Institute of Transportation Engineers.

²Total estimate for all other land uses at mixed-use development site is not subject to internal trip capture computations in this estimator.

Enter trips assuming no transit or non-motorized trips (as assumed in ITE Trip Generation Manual).

Enter vehicle occupancy assumed in Table 1-P vehicle trips. If vehicle occupancy changes for proposed mixed-use project, manual adjustments must be made

Vehicle-trips computed using the mode split and vehicle occupancy values provided in Table 2-P.

Person-Trips

*Indicates computation that has been rounded to the nearest whole number.

Estimation Tool Developed by the Texas A&M Transportation Institute - Version 2013.1

INTERNAL CAPTURE ESTIMATES EXISTING ZONING

	NCHRP 684 Internal Trip	Capture Estimation Tool	
Project Name:	Daniels Town Center	Organization:	
Project Location:	Approved Zoning	Performed By:	
Scenario Description:		Date:	
Analysis Year:		Checked By:	
Analysis Period:	AM Street Peak Hour	Date:	

Land Use	Developme	ent Data (For Info	rmation Only)		Estimated Vehicle-Trips ³	
	ITE LUCs1	Quantity	Units	Total	Entering	Exiting
Office	710/720			282	237	45
Retail	820			281	174	107
Restaurant				0		
Cinema/Entertainment				0		
Residential				0		
Hotel	310			91	30	61
All Other Land Uses ²				0		
				654	441	213

Land Use		Entering Tr	ips	Exiting Trips		
	Veh. Occ.4	% Transit	% Non-Motorized	Veh Occ.4	% Transit	% Non-Motorized
Office						
Retail						
Restaurant						
Cinema/Entertainment						
Residential						
Hotel						
All Other Land Uses ²						

	Table 3	-A: Average La	and Use Interchan	ge Distances (Feet Walking D	Distance)	
Origin (From)				Destination (To)		
Origin (From)	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office						
Retail	(
Restaurant	/s					
Cinema/Entertainment						
Residential						
Hotel	1			7		

		Table 4-A: I	nternal Person-111	p Origin-Destination Matrix*		
Origin (From)				Destination (To)		
Origin (From)	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office		13	0	0	0	0
Retail	9		0	0	0	0
Restaurant	0	0		0	0	0
Cinema/Entertainment	0	0	0	A STATE OF THE STA	0	0
Residential	0	0	0	0		0
Hotel	7	7	0	0	0	

Table 5-A:	Computation	ons Summary	
	Total	Entering	Exiting
All Person-Trips	654	441	213
Internal Capture Percentage	11%	8%	17%
External Vehicle-Trips ⁵	582	405	177
External Transit-Trips ⁶	0	0	0
External Non-Motorized Trips ⁶	0	0	0

Table 6-A: Internal	Trip Capture Percentage	ges by Land Use
Land Use	Entering Trips	Exiting Trips
Office	7%	29%
Retail	11%	8%
Restaurant	N/A	N/A
Cinema/Entertainment	N/A	N/A
Residential	N/A	N/A
Hotel	0%	23%

Land Use Codes (LUCs) from Trip Generation Manual, published by the Institute of Transportation Engineers.

²Total estimate for all other land uses at mixed-use development site is not subject to internal trip capture computations in this estimator.

Enter trips assuming no transit or non-motorized trips (as assumed in ITE Trip Generation Manual)

⁴Enter vehicle occupancy assumed in Table 1-A vehicle trips. If vehicle occupancy changes for proposed mixed-use project, manual adjustments must be made to Tables 5-A, 9-A (O and D). Enter transit, non-motorized percentages that will result with proposed mixed-use project complete.

Vehicle-trips computed using the mode split and vehicle occupancy values provided in Table 2-A

⁶Person-Trips

*Indicates computation that has been rounded to the nearest whole number.

Estimation Tool Developed by the Texas A&M Transportation Institute - Version 2013.1

	NCHRP 684 Internal Trip	Capture Estimation Tool	
Project Name:	Daniels Town Center	Organization:	
Project Location:	Approved Zoning	Performed By:	
Scenario Description:		Date:	
Analysis Year:		Checked By:	
Analysis Period:	PM Street Peak Hour	Date:	

Land Use	Developme	ent Data (For Info	rmation Only)		Estimated Vehicle-Trips	
	ITE LUCs1	Quantity	Units	Total	Entering	Exiting
Office	710/720			352	86	266
Retail	820			1,092	524	568
Restaurant				0		
Cinema/Entertainment				0		
Residential	11 7			0		
Hotel	310			61	31	30
All Other Land Uses ²				0		
				1,505	641	864

		Table 2-P:	Mode Split and Vehicle	Occupancy Estimates				
Entering Trips			Exiting Trips					
Land Use	Veh. Occ.4	% Transit	% Non-Motorized	Veh. Occ.4	% Transit	% Non-Motorized		
Office								
Retail								
Restaurant								
Cinema/Entertainment								
Residential								
Hotel								
All Other Land Uses ²								

	Table 3	3-P: Average L	and Use Interchan	ge Distances (Feet Walking D	istance)			
Origin /Fram)				Destination (To)				
Origin (From)	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel		
Office								
Retail								
Restaurant								
Cinema/Entertainment								
Residential								
Hotel								

Table 4-P: Internal Person-Trip Origin-Destination Matrix*											
Origin /Erom)		Destination (To)									
Origin (From)	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel					
Office		42	0	D	0	0					
Retail	11		0	0	0	5					
Restaurant	0	0		0	0	0					
Cinema/Entertainment	0	0	0		0	0					
Residential	0	0	0	0		0					
Hotel	0	5	0	0	0						

Table 5-P: Computations Summary									
	Total	Entering	Exiting						
All Person-Trips	1,505	641	864						
Internal Capture Percentage	8%	10%	7%						
External Vehicle-Trips ⁵	1,379	578	801						
External Transit-Trips ⁶	0	0	0						
External Non-Motorized Trips ⁶	0	0	0						

Table 6-P: Internal Trip Capture Percentages by Land Use							
Land Use	Entering Trips	Exiting Trips					
Office	13%	16%					
Retail	9%	3%					
Restaurant	N/A	N/A					
Cinema/Entertainment	N/A	N/A					
Residential	N/A	N/A					
Hotel	16%	17%					

¹Land Use Codes (LUCs) from *Trip Generation Manual*, published by the Institute of Transportation Engineers.

²Total estimate for all other land uses at mixed-use development site is not subject to internal trip capture computations in this estimator

³Enter trips assuming no transit or non-motorized trips (as assumed in ITE *Trip Generation Manual*).

⁴Enter vehicle occupancy assumed in Table 1-P vehicle trips. If vehicle occupancy changes for proposed mixed-use project, manual adjustments must be made ⁵Vehicle-trips computed using the mode split and vehicle occupancy values provided in Table 2-P.

⁶Person-Trips

*Indicates computation that has been rounded to the nearest whole number.

Estimation Tool Developed by the Texas A&M Transportation Institute - Version 2013.1

FDOT FIVE YEAR WORK PROGRAM I-75 @ DANIELS PARKWAY





Florida Department of

TRANSPORTATION

E-Updates | FL511 | Site Map | Translate



- Home
- About FDOT
- Contact Us
- Maps & Data
- Offices
- Performance
- Projects

Web Application

Office of Work Program and Budget Cynthia Lorenzo - Director

Updated: 11/18/2022 12:3;

Five Year Work Program

Selection	Criteria
District 01	2023-2027 AD
Lee County	Category: Highways
Item Number:446296-2	

Display current records in a Report Style Display current records in an Excel Document

Project Summary

Transportation System: INTRASTATE INTERSTATE

Description: SR 93 (I-75) AT CR 876 / DANIELS PARKWAY

Type of Work: INTERCHANGE IMPROVEMENT

Item Number: 446296-2

Length: 0.800

District 01 - Le
District of - Le

View Scheduled

View Ma

		ct Detail		
Fiscal Year:	2023	2024	2025	2026
Highways/Preliminary Engineering				
Amount:			\$248,400	1
Highways/Design Build				
Amount:			\$38,686,035	1
Item Total:			\$38,934,435	

This site is maintained by the Office of Work Program and Budget, located at 605 Suwannee Street, MS 21, Tallahassee, Florida 323

View Contact Information for Office of Work Program and Budget

Application Home: Work Program Office Home: Office of Work Program and Budget

INTERSECTION ANALYSIS SYNCHRO SUMMARY SHEETS

DANIELS PARKWAY @ DANPORT BLVD

	•	1	-	*	•	-	-	*	1	1	-	1
Lane Group	EBU	EBL	EBT	EBR	WBU	WBL	WBT	WBR	NBL	NBT	NBR	SBL
Lane Configurations		ሕ ኘ	ffff>			Ä	tttp		7	^	74	7
Traffic Volume (vph)	4	83	3220	98	186	102	2540	138	41	3	97	72
Future Volume (vph)	4	83	3220	98	186	102	2540	138	41	3	97	72
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)		670		0		575		0	100		100	300
Storage Lanes		2		0		1		0	1		1	1
Taper Length (ft)		25				25			25			25
Lane Util. Factor	0.86	0.97	0.86	0.86	0.86	1.00	0.86	0.86	1.00	1.00	1.00	1.00
Frt			0.996				0.992			1100	0.850	
Flt Protected		0.950				0.950			0.950			0.950
Satd. Flow (prot)	0	3433	6382	0	0	1770	6357	0	1770	1863	1583	1770
Flt Permitted		0.950				0.950			0.753			0.756
Satd. Flow (perm)	0	3433	6382	0	0	1770	6357	0	1403	1863	1583	1408
Right Turn on Red				Yes				Yes			Yes	
Satd. Flow (RTOR)			6				14	100			177	
Link Speed (mph)			30				50			30		
Link Distance (ft)			1499				1055			427		
Travel Time (s)			34.1				14.4			9.7		
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	4	90	3500	107	202	111	2761	150	45	3	105	78
Shared Lane Traffic (%)								,,,,				
Lane Group Flow (vph)	0	94	3607	0	0	313	2911	0	45	3	105	78
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	RNA	Left	Left	Right	RNA	Left	Left	Right	Left	Left	Right	Left
Median Width(ft)			24				24	3		12		
Link Offset(ft)			0				0			0		
Crosswalk Width(ft)			16				16			16		
Two way Left Turn Lane										- 11		
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	9	15		9	9	15		9	15		9	15
Number of Detectors	1	1	2		1	1	2		1	2	1	1
Detector Template	Left	Left	Thru		Left	Left	Thru		Left	Thru	Right	Left
Leading Detector (ft)	20	20	100		20	20	100		20	100	20	20
Trailing Detector (ft)	0	0	0		0	0	0		0	0	0	0
Detector 1 Position(ft)	0	0	0		0	0	0		0	0	0	0
Detector 1 Size(ft)	20	20	6		20	20	6		20	6	20	20
Detector 1 Type	CI+Ex	CI+Ex	CI+Ex		CI+Ex	CI+Ex	CI+Ex		CI+Ex	CI+Ex	CI+Ex	CI+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0		0.0	0.0	0.0		0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0		0.0	0.0	0.0		0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0		0.0	0.0	0.0		0.0	0.0	0.0	0.0
Detector 2 Position(ft)	2015	1077	94				94			94	3.12	
Detector 2 Size(ft)			6				6			6		
Detector 2 Type			CI+Ex				Cl+Ex			CI+Ex		
Detector 2 Channel										CA		
Detector 2 Extend (s)			0.0				0.0			0.0		
Turn Type	Prot	Prot	NA.		Prot	Prot	NA		Perm	NA	Perm	Perm
Protected Phases	5	5	2		1	1	6		. 5.111	8	. 51111	. 51111
Permitted Phases			-		,				8		8	4

	+	1.
Lane Group	SBT	SBR
Lane Configurations	1	7
Traffic Volume (vph)	6	56
Future Volume (vph)	6	56
Ideal Flow (vphpl)	1900	1900
Storage Length (ft)	1900	300
Storage Lanes		1
Taper Length (ft)		1
Lane Util. Factor	1.00	1.00
Frt	1.00	0.850
Fit Protected		0.000
	1863	1583
Satd. Flow (prot) Flt Permitted	1003	1003
	1000	1583
Satd. Flow (perm)	1863	
Right Turn on Red		Yes
Satd. Flow (RTOR)	20	177
Link Speed (mph)	30	
Link Distance (ft)	504	
Travel Time (s) Peak Hour Factor	11.5	0.92
1 - 40 1 1 4 4 4 1 1 4 4 4 4 4	7	61
Adj. Flow (vph)	- 1	01
Shared Lane Traffic (%)	7	04
Lane Group Flow (vph)	7	61
Enter Blocked Intersection	No	No
Lane Alignment	Left	Right
Median Width(ft)	12	
Link Offset(ft)	0	
Crosswalk Width(ft)	16	
Two way Left Turn Lane		
Headway Factor	1.00	1.00
Turning Speed (mph)		9
Number of Detectors	2	1
Detector Template	Thru	Right
Leading Detector (ft)	100	20
Trailing Detector (ft)	0	0
Detector 1 Position(ft)	0	0
Detector 1 Size(ft)	6	20
Detector 1 Type	CI+Ex	CI+Ex
Detector 1 Channel		
Detector 1 Extend (s)	0.0	0.0
Detector 1 Queue (s)	0.0	0.0
Detector 1 Delay (s)	0.0	0.0
Detector 2 Position(ft)	94	3.0
Detector 2 Size(ft)	6	
Detector 2 Type	CI+Ex	
Detector 2 Channel	OILLY	
Detector 2 Extend (s)	0.0	
		Dorm
Turn Type	NA	Perm
Protected Phases	4	
Permitted Phases		4

	•	1	-	+	•	1	-	1	1	1	-	1
Lane Group	EBU	EBL	EBT	EBR	WBU	WBL	WBT	WBR	NBL	NBT	NBR	SBL
Detector Phase	5	5	2		1	1	6		8	8	8	4
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0		5.0	5.0	5.0		5.0	5.0	5.0	5.0
Minimum Split (s)	13.6	13.6	28.0		13.7	13.7	28.0		27.9	27.9	27.9	27.9
Total Split (s)	17.2	17.2	87.0		35.0	35.0	104.8		28.0	28.0	28.0	28.0
Total Split (%)	11.5%	11.5%	58.0%		23.3%	23.3%	69.9%		18.7%	18.7%	18.7%	18.7%
Maximum Green (s)	8.6	8.6	77.0		26.3	26.3	94.8		18.1	18.1	18.1	18.1
Yellow Time (s)	3.4	3.4	4.8		3.5	3.5	4.8		4.8	4.8	4.8	4.8
All-Red Time (s)	5.2	5.2	5.2		5.2	5.2	5.2		5.1	5.1	5.1	5.1
Lost Time Adjust (s)		0.0	0.0			0.0	0.0		0.0	0.0	0.0	0.0
Total Lost Time (s)		8.6	10.0			8.7	10.0		9.9	9.9	9.9	9.9
Lead/Lag	Lead	Lead	Lag		Lead	Lead	Lag					
Lead-Lag Optimize?	Yes	Yes	Yes		Yes	Yes	Yes					
Vehicle Extension (s)	3.0	3.0	3.0		3.0	3.0	3.0		3.0	3.0	3.0	3.0
Recall Mode	None	None	C-Max		None	None	C-Max		Max	Max	Max	Max
Walk Time (s)			7.0				7.0		7.0	7.0	7.0	7.0
Flash Dont Walk (s)			11.0				11.0		11.0	11.0	11.0	11.0
Pedestrian Calls (#/hr)			0				0		0	0	0	0
Act Effct Green (s)		8.2	77.0			26.3	95.2		18.1	18.1	18.1	18.1
Actuated g/C Ratio		0.05	0.51			0.18	0.63		0.12	0.12	0.12	0.12
v/c Ratio		0.50	1.10			1.01	0.72		0.27	0.01	0.30	0.46
Control Delay		78.3	85.4			103.5	17.4		64.5	58.3	2.2	71.1
Queue Delay		0.0	0.0			0.0	0.0		0.0	0.0	0.0	0.0
Total Delay		78.3	85.4			103.5	17.4		64.5	58.3	2.2	71.1
LOS		E	F			F	В		E	E	Α	E
Approach Delay			85.2				25.8			21.7		
Approach LOS			F				C			C		

Intersection Summary

Area Type: Other

Cycle Length: 150

Actuated Cycle Length: 150

Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green

Natural Cycle: 150

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 1.10

Intersection Signal Delay: 56.5


Intersection Capacity Utilization 106.5%

Intersection LOS: E

ICU Level of Service G

Analysis Period (min) 15

Splits and Phases: 6: Daniels 9300/Danport Blvd. & Daniels Pkwy



Intersection Summary

	11/14/2022

	↓	1
Lane Group	SBT	SBR
Detector Phase	4	4
Switch Phase		
Minimum Initial (s)	5.0	5.0
Minimum Split (s)	27.9	27.9
Total Split (s)	28.0	28.0
Total Split (%)	18.7%	18.7%
Maximum Green (s)	18.1	18.1
Yellow Time (s)	4.8	4.8
All-Red Time (s)	5.1	5.1
Lost Time Adjust (s)	0.0	0.0
Total Lost Time (s)	9.9	9.9
Lead/Lag		
Lead-Lag Optimize?		
Vehicle Extension (s)	3.0	3.0
Recall Mode	Max	Max
Walk Time (s)	7.0	7.0
Flash Dont Walk (s)	11.0	11.0
Pedestrian Calls (#/hr)	0	0
Act Effct Green (s)	18.1	18.1
Actuated g/C Ratio	0.12	0.12
v/c Ratio	0.03	0.18
Control Delay	58.8	1.1
Queue Delay	0.0	0.0
Total Delay	58.8	1.1
LOS	E	Α
Approach Delay	41.3	
Approach LOS	D	

6: Daniels 9300/Da						- E.N.		À.	13.		7.5	
	3	-	-	1	F	1	-	-	1	T	1	-
Lane Group	EBU	EBL	EBT	EBR	WBU	WBL	WBT	WBR	NBL	NBT	NBR	SBL
Lane Configurations		57	4111			ā	###		1	1	7	M
Traffic Volume (vph)	2	66	3832	80	26	68	3064	110	37	10	108	166
Future Volume (vph)	2	66	3832	80	26	68	3064	110	37	10	108	166
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)		670		0		575		0	100		100	300
Storage Lanes		2		0		1		0	1		1	1
Taper Length (ft)		25				25			25			25
Lane Util. Factor	0.86	0.97	0.86	0.86	0.86	1.00	0.86	0.86	1.00	1.00	1.00	1.00
Frt	0.00	0.01	0.997	0.00	0.00	1.00	0.995	0.00	1.00	1.00	0.850	1.00
Flt Protected		0.950	0.001			0.950	0.000		0.950		0.000	0.950
Satd. Flow (prot)	0	3433	6389	0	0	1770	6376	0	1770	1863	1583	1770
Flt Permitted	· ·	0.950	0000	Ü	U	0.950	0010	U	0.753	1000	1000	0.750
Satd. Flow (perm)	0	3433	6389	0	0	1770	6376	0	1403	1863	1583	1397
The state of the s	U	3433	0309	Yes	U	1770	0370	Yes	1403	1003	Yes	1397
Right Turn on Red			1	res			0	res			183	
Satd. Flow (RTOR)			4				8			20	100	
Link Speed (mph)			30				50			30		
Link Distance (ft)			1499				1055			427		
Travel Time (s)	0.00	0.00	34.1	0.00	0.00	0.00	14.4	0.00	0.00	9.7	0.00	0.00
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	2	72	4165	87	28	74	3330	120	40	11	117	180
Shared Lane Traffic (%)			10.00	-		VEGE					V V=	W U U
Lane Group Flow (vph)	0	74	4252	0	0	102	3450	0	40	11	117	180
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	RNA	Left	Left	Right	RNA	Left	Left	Right	Left	Left	Right	Left
Median Width(ft)			24				24			12		
Link Offset(ft)			0				0			0		
Crosswalk Width(ft)			16				16			16		
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	9	15		9	9	15		9	15		9	15
Number of Detectors	1	1	2		1	1	2		1	2	1	1
Detector Template	Left	Left	Thru		Left	Left	Thru		Left	Thru	Right	Left
Leading Detector (ft)	20	20	100		20	20	100		20	100	20	20
Trailing Detector (ft)	0	0	0		0	0	0		0	0	0	0
Detector 1 Position(ft)	0	0	0		0	0	0		0	0	0	0
Detector 1 Size(ft)	20	20	6		20	20	6		20	6	20	20
Detector 1 Type	CI+Ex	CI+Ex	CI+Ex		CI+Ex	CI+Ex	CI+Ex		CI+Ex	CI+Ex	CI+Ex	CI+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0		0.0	0.0	0.0		0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0		0.0	0.0	0.0		0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0		0.0	0.0	0.0		0.0	0.0	0.0	0.0
Detector 2 Position(ft)	0.0	0.0	94		0.0	0.0	94		0.0	94	0.0	0.0
Detector 2 Size(ft)			6				6			6		
			CI+Ex				CI+Ex			CI+Ex		
Detector 2 Type			CITEX				CITEX			CITEX		
Detector 2 Channel			0.0				0.0			0.0		
Detector 2 Extend (s)	D- /	D	0.0		D	D/	0.0		Desire	0.0	Desarra	D
Turn Type	Prot	Prot	NA 2		Prot	Prot	NA 6		Perm	NA 8	Perm	Perm
LIFOTO OTO A LIN OCCO	h	h	.,		7	7	6			×		

5

5

Protected Phases

Permitted Phases

8

6

8

	1	1
Lane Group	SBT	SBR
Lane Configurations	A	7
Traffic Volume (vph)	6	69
Future Volume (vph)	6	69
Ideal Flow (vphpl)	1900	1900
Storage Length (ft)	1000	300
Storage Lanes		1
Taper Length (ft)		
Lane Util. Factor	1.00	1.00
Frt	1.00	0.850
		0.850
Fit Protected	4000	4500
Satd. Flow (prot)	1863	1583
Flt Permitted	1000	4500
Satd. Flow (perm)	1863	1583
Right Turn on Red		Yes
Satd. Flow (RTOR)		183
Link Speed (mph)	30	
Link Distance (ft)	504	
Travel Time (s)	11.5	
Peak Hour Factor	0.92	0.92
Adj. Flow (vph)	7	75
Shared Lane Traffic (%)		
Lane Group Flow (vph)	7	75
Enter Blocked Intersection	No	No
Lane Alignment	Left	Right
Median Width(ft)	12	
Link Offset(ft)	0	
Crosswalk Width(ft)	16	
Two way Left Turn Lane		
Headway Factor	1.00	1.00
Turning Speed (mph)		9
Number of Detectors	2	1
Detector Template	Thru	Right
Leading Detector (ft)	100	20
Trailing Detector (ft)	0	0
Detector 1 Position(ft)	0	0
Detector 1 Size(ft)	6	20
Detector 1 Type	CI+Ex	CI+Ex
Detector 1 Channel	CITEX	OITEX
Detector 1 Extend (s)	0.0	0.0
Detector 1 Queue (s)	0.0	0.0
Detector 1 Delay (s)	0.0	0.0
Detector 2 Position(ft)	94	
Detector 2 Size(ft)	6	
Detector 2 Type	CI+Ex	
Detector 2 Channel		
Detector 2 Extend (s)	0.0	
Turn Type	NA	Perm
Protected Phases	4	
Permitted Phases		4

	•	1	-	-	F	1	+	1	1	1	-	1
Lane Group	EBU	EBL	EBT	EBR	WBU	WBL	WBT	WBR	NBL	NBT	NBR	SBL
Detector Phase	5	5	2		1	1	6		8	8	8	4
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0		5.0	5.0	5.0		5.0	5.0	5.0	5.0
Minimum Split (s)	13.6	13.6	28.0		13.7	13.7	28.0		27.9	27.9	27.9	27.9
Total Split (s)	13.9	13.9	80.0		31.0	31.0	97.1		34.0	34.0	34.0	34.0
Total Split (%)	9.6%	9.6%	55.2%		21.4%	21.4%	67.0%		23.4%	23.4%	23.4%	23.4%
Maximum Green (s)	5.3	5.3	70.0		22.3	22.3	87.1		24.1	24.1	24.1	24.1
Yellow Time (s)	3.4	3.4	4.8		3.5	3.5	4.8		4.8	4.8	4.8	4.8
All-Red Time (s)	5.2	5.2	5.2		5.2	5.2	5.2		5.1	5.1	5.1	5.1
Lost Time Adjust (s)		0.0	0.0			0.0	0.0		0.0	0.0	0.0	0.0
Total Lost Time (s)		8.6	10.0			8.7	10.0		9.9	9.9	9.9	9.9
Lead/Lag	Lead	Lead	Lag		Lead	Lead	Lag					
Lead-Lag Optimize?	Yes	Yes	Yes		Yes	Yes	Yes					
Vehicle Extension (s)	3.0	3.0	3.0		3.0	3.0	3.0		3.0	3.0	3.0	3.0
Recall Mode	None	None	C-Max		None	None	C-Max		Max	Max	Max	Max
Walk Time (s)			7.0				7.0		7.0	7.0	7.0	7.0
Flash Dont Walk (s)			11.0				11.0		11.0	11.0	11.0	11.0
Pedestrian Calls (#/hr)			0				0		0	0	0	0
Act Effct Green (s)		5.3	78.6			13.7	87.1		24.1	24.1	24.1	24.1
Actuated g/C Ratio		0.04	0.54			0.09	0.60		0.17	0.17	0.17	0.17
v/c Ratio		0.59	1.23			0.61	0.90		0.17	0.04	0.28	0.78
Control Delay		88.0	135.8			81.1	23.8		54.2	51.3	2.0	80.4
Queue Delay		0.0	0.0			0.0	0.0		0.0	0.0	0.0	0.0
Total Delay		88.0	135.8			81.1	23.8		54.2	51.3	2.0	80.4
LOS		F	F			F	C		D	D	Α	F
Approach Delay			135.0				25.5			17.6		
Approach LOS			F				C			В		
Intersection Summary	10500	1	200							-	-	

Intersection Summary

Area Type: Other

Cycle Length: 145

Actuated Cycle Length: 145

Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green

Natural Cycle: 150

Control Type: Actuated-Coordinated


Maximum v/c Ratio: 1.23

Intersection Signal Delay: 83.4
Intersection Capacity Utilization 110.0%

Intersection LOS: F
ICU Level of Service H

Analysis Period (min) 15

Splits and Phases: 6: Daniels 9300/Danport Blvd. & Daniels Pkwy



	†	1
Lane Group	SBT	SBR
Detector Phase	4	4
Switch Phase		
Minimum Initial (s)	5.0	5.0
Minimum Split (s)	27.9	27.9
Total Split (s)	34.0	34.0
Total Split (%)	23.4%	23.4%
Maximum Green (s)	24.1	24.1
Yellow Time (s)	4.8	4.8
All-Red Time (s)	5.1	5.1
Lost Time Adjust (s)	0.0	0.0
Total Lost Time (s)	9.9	9.9
Lead/Lag		
Lead-Lag Optimize?		
Vehicle Extension (s)	3.0	3.0
Recall Mode	Max	Max
Walk Time (s)	7.0	7.0
Flash Dont Walk (s)	11.0	11.0
Pedestrian Calls (#/hr)	0	0
Act Effct Green (s)	24.1	24.1
Actuated g/C Ratio	0.17	0.17
v/c Ratio	0.02	0.18
Control Delay	51.0	1.0
Queue Delay	0.0	0.0
Total Delay	51.0	1.0
LOS	D	Α
Approach Delay	56.9	
Approach LOS	E	
ntersection Summary		

04/16/2024

	•	*	-	*	4	1	-	1	1	1	1	1
Lane Group	EBU	EBL	EBT	EBR	WBU	WBL	WBT	WBR	NBL	NBT	NBR	SBL
Lane Configurations		37	tttp			ă	attt		7	1	7	1
Traffic Volume (vph)	4	83	3220	123	186	114	2540	138	41	3	97	72
Future Volume (vph)	4	83	3220	123	186	114	2540	138	41	3	97	72
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	(0.00	670	13.27	0	307 4.4	575		0	100	,	100	300
Storage Lanes		2		0		1		0	1		1	1
Taper Length (ft)		25		1.0		25			25			25
Lane Util. Factor	0.86	0.97	0.86	0.86	0.86	1.00	0.86	0.86	1.00	1.00	1.00	1.00
Frt			0.994				0.992				0.850	
Fit Protected		0.950				0.950			0.950			0.950
Satd. Flow (prot)	0	3433	6369	0	0	1770	6357	0	1770	1863	1583	1770
Fit Permitted		0.950	0000			0.950	0001	,	0.753	1000	1000	0.756
Satd. Flow (perm)	0	3433	6369	0	0	1770	6357	0	1403	1863	1583	1408
Right Turn on Red		0100	0000	Yes	,	1110	0001	Yes	1100	1000	Yes	1100
Satd. Flow (RTOR)			7	1.00			14	100			177	
Link Speed (mph)			30				50			30	1000	
Link Distance (ft)			1523				1055			427		
Travel Time (s)			34.6				14.4			9.7		
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	4	90	3500	134	202	124	2761	150	45	3	105	78
Shared Lane Traffic (%)	7	50	0000	104	202	124	2101	100	40	J	100	70
Lane Group Flow (vph)	0	94	3634	0	0	326	2911	0	45	3	105	78
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	RNA	Left	Left	Right	RNA	Left	Left	Right	Left	Left	Right	Left
Median Width(ft)	IVIVA	Lon	24	ragin	IN INCA	LOIL	24	ragin	Lon	12	ragin	LOIL
Link Offset(ft)			0				0			0		
Crosswalk Width(ft)			16				16			16		
Two way Left Turn Lane			10				10			10		
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	9	15	1,00	9	9	15	1.00	9	15	1.00	9	15
Number of Detectors	1	1	2	3	1	1	2	3	1	2	1	1
Detector Template	Left	Left	Thru		Left	Left	Thru		Left	Thru	Right	Left
Leading Detector (ft)	20	20	100		20	20	100		20	100	20	20
Trailing Detector (ft)	0	0	0		0	0	0		0	0	0	0
Detector 1 Position(ft)	0	0	0		0	0	0		0	0	0	0
Detector 1 Size(ft)	20	20	6		20	20	6		20	6	20	20
Detector 1 Type	CI+Ex	CI+Ex	CI+Ex		CI+Ex	CI+Ex	CI+Ex		CI+Ex	CI+Ex	CI+Ex	CI+Ex
Detector 1 Channel	OITEX	OILLX	OILLX		OI. LX	OITEX	OITEX		OI. LX	OILLX	OI · LX	OI. LX
Detector 1 Extend (s)	0.0	0.0	0.0		0.0	0.0	0.0		0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0		0.0	0.0	0.0		0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0		0.0	0.0	0.0		0.0	0.0	0.0	0.0
Detector 2 Position(ft)	0.0	0.0	94		0.0	0.0	94		0.0	94	0.0	0.0
Detector 2 Size(ft)			6				6			6		
Detector 2 Type			CI+Ex				CI+Ex			CI+Ex		
Detector 2 Type Detector 2 Channel			CITEX				CITEX			CITEX		
			0.0				0.0			0.0		
Detector 2 Extend (s)	Drot	Prot	NA		Prot	Prot	NA		Perm	NA	Perm	Perm
Turn Type	Prot 5	5	NA 2		Prot 1		6		reilli	NA 8	reill	reiin
Protected Phases	5	3	2		- 1	1	0		0	0	0	4
Permitted Phases									8		8	4

	1	1
Lane Group	SBT	SBR
Lane Configurations	1	7
Traffic Volume (vph)	6	56
Future Volume (vph)	6	56
Ideal Flow (vphpl)	1900	1900
Storage Length (ft)	1900	300
Storage Lanes		1
		1
Taper Length (ft)	4.00	1.00
Lane Util. Factor	1.00	1.00
Frt		0.850
Fit Protected	4000	1000
Satd. Flow (prot)	1863	1583
Fit Permitted		11990
Satd. Flow (perm)	1863	1583
Right Turn on Red		Yes
Satd. Flow (RTOR)		177
Link Speed (mph)	30	
Link Distance (ft)	504	
Travel Time (s)	11.5	
Peak Hour Factor	0.92	0.92
Adj. Flow (vph)	7	61
Shared Lane Traffic (%)		
Lane Group Flow (vph)	7	61
Enter Blocked Intersection	No	No
Lane Alignment	Left	Right
Median Width(ft)	12	ragin
	0	
Link Offset(ft)		
Crosswalk Width(ft)	16	
Two way Left Turn Lane	4.00	4.00
Headway Factor	1.00	1.00
Turning Speed (mph)	1 - 5	9
Number of Detectors	_ 2	1
Detector Template	Thru	Right
Leading Detector (ft)	100	20
Trailing Detector (ft)	0	0
Detector 1 Position(ft)	0	0
Detector 1 Size(ft)	6	20
Detector 1 Type	CI+Ex	CI+Ex
Detector 1 Channel		
Detector 1 Extend (s)	0.0	0.0
Detector 1 Queue (s)	0.0	0.0
Detector 1 Delay (s)	0.0	0.0
Detector 2 Position(ft)	94	0.0
Detector 2 Size(ft)	6 CUE	
Detector 2 Type	CI+Ex	
Detector 2 Channel		
Detector 2 Extend (s)	0.0	
Turn Type	NA	Perm
Protected Phases	4	
Permitted Phases		4

	•	1	-	7	F	1	-	*	1	1	-	1
Lane Group	EBU	EBL	EBT	EBR	WBU	WBL	WBT	WBR	NBL	NBT	NBR	SBL
Detector Phase	5	5	2		1	1	6		8	8	8	4
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0		5.0	5.0	5.0		5.0	5.0	5.0	5.0
Minimum Split (s)	13.6	13.6	28.0		13.7	13.7	28.0		27.9	27.9	27.9	27.9
Total Split (s)	17.1	17.1	90.1		32.0	32.0	105.0		27.9	27.9	27.9	27.9
Total Split (%)	11.4%	11.4%	60.1%		21.3%	21.3%	70.0%		18.6%	18.6%	18.6%	18.6%
Maximum Green (s)	8.5	8.5	80.1		23.3	23.3	95.0		18.0	18.0	18.0	18.0
Yellow Time (s)	3.4	3.4	4.8		3.5	3.5	4.8		4.8	4.8	4.8	4.8
All-Red Time (s)	5.2	5.2	5.2		5.2	5.2	5.2		5.1	5.1	5.1	5.1
Lost Time Adjust (s)		0.0	0.0			0.0	0.0		0.0	0.0	0.0	0.0
Total Lost Time (s)		8.6	10.0			8.7	10.0		9.9	9.9	9.9	9.9
Lead/Lag	Lead	Lead	Lag		Lead	Lead	Lag					
Lead-Lag Optimize?	Yes	Yes	Yes		Yes	Yes	Yes					The same
Vehicle Extension (s)	3.0	3.0	3.0		3.0	3.0	3.0		3.0	3.0	3.0	3.0
Recall Mode	None	None	C-Max		None	None	C-Max		Max	Max	Max	Max
Walk Time (s)			7.0				7.0		7.0	7.0	7.0	7.0
Flash Dont Walk (s)			11.0				11.0		11.0	11.0	11.0	11.0
Pedestrian Calls (#/hr)			0				0		0	0	0	0
Act Effct Green (s)		8.2	80.1			23.3	95.3		18.0	18.0	18.0	18.0
Actuated g/C Ratio		0.05	0.53			0.16	0.64		0.12	0.12	0.12	0.12
v/c Ratio		0.51	1.07			1.19	0.72		0.27	0.01	0.30	0.46
Control Delay		78.6	71.3			158.4	16.0		64.7	58.7	2.3	71.3
Queue Delay		0.0	14.1			0.2	0.0		0.0	0.0	0.4	3.9
Total Delay		78.6	85.4			158.6	16.0		64.7	58.7	2.7	75.2
LOS		E	F			F	В		E	E	Α	E
Approach Delay			85.3				30.3			22.0		
Approach LOS			F				C			C		

Area Type:

Cycle Length: 150

Actuated Cycle Length: 150

Offset: 95 (63%), Referenced to phase 2:EBT and 6:WBT, Start of Green

Other

Natural Cycle: 150

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 1.19


Intersection Signal Delay: 58.6

Intersection Capacity Utilization 107.6%

Intersection LOS: E
ICU Level of Service G

Analysis Period (min) 15

Splits and Phases: 6: Daniels 9300/Danport Blvd. & Daniels Pkwy



	1	1
Lane Group	SBT	SBR
Detector Phase	4	4
Switch Phase		
Minimum Initial (s)	5.0	5.0
Minimum Split (s)	27.9	27.9
Total Split (s)	27.9	27.9
Total Split (%)	18.6%	18.6%
Maximum Green (s)	18.0	18.0
Yellow Time (s)	4.8	4.8
All-Red Time (s)	5.1	5.1
Lost Time Adjust (s)	0.0	0.0
Total Lost Time (s)	9.9	9.9
Lead/Lag		
Lead-Lag Optimize?		
Vehicle Extension (s)	3.0	3.0
Recall Mode	Max	Max
Walk Time (s)	7.0	7.0
Flash Dont Walk (s)	11.0	11.0
Pedestrian Calls (#/hr)	0	0
Act Effct Green (s)	18.0	18.0
Actuated g/C Ratio	0.12	0.12
v/c Ratio	0.03	0.18
Control Delay	58.8	1.1
Queue Delay	0.0	0.0
Total Delay	58.8	1.1
LOS	E	Α
Approach Delay	43.5	
Approach LOS	D	
Intersection Summary		77

04/16/2024

Lane Configurations Traffic Volume (vph) Future Volume (vph) Ideal Flow (vphpl) Storage Length (ft) Storage Lanes Taper Length (ft) Lane Util. Factor Frt Fit Protected Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection	2 2 1900 0.86 0	66 66 1900 670 2 25 0.97 0.950 3433 0.950 3433	8832 3832 3832 1900 0.86 0.995 6376	120 120 1900 0 0 0.86	26 26 1900	WBL 113 113 1900 575 1 25 1.00	WBT 1113- 3064 3064 1900	110 110 1900 0 0	37 37 1900 100 1 25 1.00	NBT 10 10 1900	108 108 108 1900 100 1	166 166 1900 300 1 25
Lane Configurations Traffic Volume (vph) Future Volume (vph) Ideal Flow (vphpl) Storage Length (ft) Storage Lanes Taper Length (ft) Lane Util. Factor Frt Fit Protected Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)	2 1900 0.86	66 66 1900 670 2 25 0.97 0.950 3433 0.950	3832 3832 1900 0.86 0.995 6376	120 1900 0 0	26 1900	113 113 1900 575 1 25	3064 3064 1900	110 1900 0 0	37 37 1900 100 1 25	10 10 1900	108 108 1900 100	166 166 1900 300 1 25
Traffic Volume (vph) Future Volume (vph) Ideal Flow (vphpl) Storage Length (ft) Storage Lanes Taper Length (ft) Lane Util. Factor Frt Flt Protected Satd. Flow (prot) Flt Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)	2 1900 0.86	66 66 1900 670 2 25 0.97 0.950 3433 0.950	3832 3832 1900 0.86 0.995 6376	120 1900 0 0	26 1900	113 113 1900 575 1 25	3064 3064 1900	110 1900 0 0	37 37 1900 100 1 25	10 10 1900	108 108 1900 100	166 166 1900 300 1 25
Future Volume (vph) Ideal Flow (vphpl) Storage Length (ft) Storage Lanes Taper Length (ft) Lane Util. Factor Frt Flt Protected Satd. Flow (prot) Flt Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)	2 1900 0.86	66 1900 670 2 25 0.97 0.950 3433 0.950	3832 1900 0.86 0.995 6376	120 1900 0 0	26 1900	113 1900 575 1 25	3064 1900	110 1900 0 0	37 1900 100 1 25	10 1900	108 1900 100	166 1900 300 1 25
Ideal Flow (vphpl) Storage Length (ft) Storage Lanes Taper Length (ft) Lane Util. Factor Frt Flt Protected Satd. Flow (prot) Flt Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)	0.86	1900 670 2 25 0.97 0.950 3433 0.950	0.86 0.995 6376	1900 0 0	1900	1900 575 1 25	1900	1900 0 0	1900 100 1 25	1900	1900 100 1	1900 300 1 25
Storage Length (ft) Storage Lanes Taper Length (ft) Lane Util. Factor Frt Flt Protected Satd. Flow (prot) Flt Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)	0.86	670 2 25 0.97 0.950 3433 0.950	0.86 0.995 6376	0 0 0.86		575 1 25		0	100 1 25		100	300 1 25
Storage Lanes Taper Length (ft) Lane Util. Factor Frt Flt Protected Satd. Flow (prot) Flt Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)	0	2 25 0.97 0.950 3433 0.950	0.995 6376	0.86	0.86	1 25	0.86	0	1 25	1.00	1	1 25
Taper Length (ft) Lane Util. Factor Frt Flt Protected Satd. Flow (prot) Flt Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)	0	25 0.97 0.950 3433 0.950	0.995 6376	0.86	0.86	25	0.86		25	1.00		25
Lane Util. Factor Frt Flt Protected Satd. Flow (prot) Flt Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)	0	0.97 0.950 3433 0.950	0.995 6376		0.86		0.86	0.86		1.00	4.66	
Frt Flt Protected Satd. Flow (prot) Flt Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)	0	0.950 3433 0.950	0.995 6376		0.00	1.00	0.00		1 (1)	1 (1)	1.00	1.00
Fit Protected Satd. Flow (prot) Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)		3433 0.950	6376	0			0.995		1.00	1.00	0.850	1.00
Satd. Flow (prot) Flt Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)		3433 0.950		0		0.950	0.000		0.950		0.000	0.950
Fit Permitted Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)		0.950		U	0	1770	6376	0	1770	1863	1583	1770
Satd. Flow (perm) Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)	0	THE PERSON NAMED IN COLUMN 1	6276		-	0.950	03/0	·	0.753	1000	1000	0.750
Right Turn on Red Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)	v	3433		0	0	1770	6376	0	1403	1863	1583	1397
Satd. Flow (RTOR) Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)			03/0	Yes	U	1770	0370	Yes	1403	1003	Yes	1397
Link Speed (mph) Link Distance (ft) Travel Time (s) Peak Hour Factor Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)			6	165			8	168			183	
Link Distance (ft) Travel Time (s) Peak Hour Factor Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)			30				50			20	103	_
Travel Time (s) Peak Hour Factor Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)										30		
Peak Hour Factor Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)			1523				1055			427		_
Adj. Flow (vph) Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)	0.00	0.00	34.6	0.00	0.00	0.00	14.4	0.00	0.00	9.7	0.00	0.00
Shared Lane Traffic (%) Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Lane Group Flow (vph) Enter Blocked Intersection Lane Alignment Median Width(ft)	2	72	4165	130	28	123	3330	120	40	11	117	180
Enter Blocked Intersection Lane Alignment Median Width(ft)		-	4000								12.76	
Lane Alignment F Median Width(ft)	0	74	4295	0	0	151	3450	0	40	11	117	180
Median Width(ft)	No	No	No	No	No	No	No	No	No	No	No	No
	R NA	Left	Left	Right	RNA	Left	Left	Right	Left	Left	Right	Left
link Offset(ft)			24				24			12		
			0				0			0		
Crosswalk Width(ft)			16				16			16		
Two way Left Turn Lane												
	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	9	15		9	9	15		9	15		9	15
Number of Detectors	1	1	2		1	1	2		1	2	1	1
Detector Template	Left	Left	Thru		Left	Left	Thru		Left	Thru	Right	Left
Leading Detector (ft)	20	20	100		20	20	100		20	100	20	20
Trailing Detector (ft)	0	0	0		0	0	0		0	0	0	0
Detector 1 Position(ft)	0	0	0		0	0	0		0	0	0	0
Detector 1 Size(ft)	20	20	6		20	20	6		20	6	20	20
Detector 1 Type C	I+Ex	CI+Ex	CI+Ex		CI+Ex	CI+Ex	CI+Ex		CI+Ex	CI+Ex	CI+Ex	CI+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0		0.0	0.0	0.0		0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0		0.0	0.0	0.0		0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0		0.0	0.0	0.0		0.0	0.0	0.0	0.0
Detector 2 Position(ft)			94				94			94		100
Detector 2 Size(ft)			6				6			6		
Detector 2 Type			CI+Ex				CI+Ex			CI+Ex		
Detector 2 Channel												
Detector 2 Extend (s)			0.0				0.0			0.0		
	Prot	Prot	NA		Prot	Prot	NA		Perm	NA	Perm	Perm
Protected Phases	5	5	2		1	1	6		. 5.111	8	. 51111	. 5/11/
Permitted Phases			_						8	· ·	8	4

	1	1
Lane Group	SBT	SBR
Lane Configurations	1	75
Traffic Volume (vph)	6	69
Future Volume (vph)	6	69
Ideal Flow (vphpl)	1900	1900
Storage Length (ft)	1300	300
Storage Lanes		1
Taper Length (ft)	1.00	1.00
Lane Util. Factor	1.00	1.00
Frt		0.850
FIt Protected	4000	4500
Satd. Flow (prot)	1863	1583
FIt Permitted		
Satd. Flow (perm)	1863	1583
Right Turn on Red		Yes
Satd. Flow (RTOR)		183
Link Speed (mph)	30	- 31
Link Distance (ft)	504	
Travel Time (s)	11.5	
Peak Hour Factor	0.92	0.92
Adj. Flow (vph)	7	75
Shared Lane Traffic (%)		
Lane Group Flow (vph)	7	75
Enter Blocked Intersection	No	No
Lane Alignment	Left	Right
Median Width(ft)	12	3
Link Offset(ft)	0	
Crosswalk Width(ft)	16	
Two way Left Turn Lane	,5	
Headway Factor	1.00	1.00
Turning Speed (mph)	1.00	9
Number of Detectors	2	1
Detector Template	Thru	Right
Leading Detector (ft)	100	20
Trailing Detector (ft)	0	0
Detector 1 Position(ft)	0	0
Detector 1 Size(ft)	6	20
Detector 1 Type	CI+Ex	CI+Ex
Detector 1 Channel		
Detector 1 Extend (s)	0.0	0.0
Detector 1 Queue (s)	0.0	0.0
Detector 1 Delay (s)	0.0	0.0
Detector 2 Position(ft)	94	
Detector 2 Size(ft)	6	
Detector 2 Type	CI+Ex	
Detector 2 Channel		
Detector 2 Extend (s)	0.0	
Turn Type	NA	Perm
Protected Phases	4	, 3,,,,,
Permitted Phases		4
Terrinded Fridaes		7

	•	1	-	7	F	1	-	1	1	1	1	1
Lane Group	EBU	EBL	EBT	EBR	WBU	WBL	WBT	WBR	NBL	NBT	NBR	SBL
Detector Phase	5	5	2		1	1	6		8	8	8	4
Switch Phase												
Minimum Initial (s)	5.0	5.0	5.0		5.0	5.0	5.0		5.0	5.0	5.0	5.0
Minimum Split (s)	13.6	13.6	28.0		13.7	13.7	28.0		27.9	27.9	27.9	27.9
Total Split (s)	13.9	13.9	80.0		31.0	31.0	97.1		34.0	34.0	34.0	34.0
Total Split (%)	9.6%	9.6%	55.2%		21.4%	21.4%	67.0%		23.4%	23.4%	23.4%	23.4%
Maximum Green (s)	5.3	5.3	70.0		22.3	22.3	87.1		24.1	24.1	24.1	24.1
Yellow Time (s)	3.4	3.4	4.8		3.5	3.5	4.8		4.8	4.8	4.8	4.8
All-Red Time (s)	5.2	5.2	5.2		5.2	5.2	5.2		5.1	5.1	5.1	5.1
Lost Time Adjust (s)		0.0	0.0			0.0	0.0		0.0	0.0	0.0	0.0
Total Lost Time (s)		8.6	10.0			8.7	10.0		9.9	9.9	9.9	9.9
Lead/Lag	Lead	Lead	Lag		Lead	Lead	Lag					
Lead-Lag Optimize?	Yes	Yes	Yes		Yes	Yes	Yes					
Vehicle Extension (s)	3.0	3.0	3.0		3.0	3.0	3.0		3.0	3.0	3.0	3.0
Recall Mode	None	None	C-Max		None	None	C-Max		Max	Max	Max	Max
Walk Time (s)			7.0				7.0		7.0	7.0	7.0	7.0
Flash Dont Walk (s)			11.0				11.0		11.0	11.0	11.0	11.0
Pedestrian Calls (#/hr)			0				0		0	0	0	0
Act Effct Green (s)		5.3	75.0			17.3	87.1		24.1	24.1	24.1	24.1
Actuated g/C Ratio		0.04	0.52			0.12	0.60		0.17	0.17	0.17	0.17
v/c Ratio		0.59	1.30			0.72	0.90		0.17	0.04	0.28	0.78
Control Delay		88.0	169.0			79.6	23.7		54.2	51.3	2.0	80.4
Queue Delay		0.0	0.0			0.0	0.0		0.0	0.0	0.0	0.0
Total Delay		88.0	169.0			79.6	23.7		54.2	51.3	2.0	80.4
LOS		F	F			E	C		D	D	Α	F
Approach Delay			167.6				26.0			17.6		
Approach LOS			F				C			В		
Intersection Summary	STATE OF THE PARTY.		SEC.				10 - 20	-			-	-1-5

Area Type: Other

Cycle Length: 145

Actuated Cycle Length: 145

Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green

Natural Cycle: 150


Control Type: Actuated-Coordinated

Maximum v/c Ratio: 1.30

Intersection Signal Delay: 100.5 Intersection LOS: F
Intersection Capacity Utilization 113.2% ICU Level of Service H

Analysis Period (min) 15

Splits and Phases: 6: Daniels 9300/Danport Blvd. & Daniels Pkwy



	1	1
Lane Group	SBT	SBR
Detector Phase	4	4
Switch Phase		
Minimum Initial (s)	5.0	5.0
Minimum Split (s)	27.9	27.9
Total Split (s)	34.0	34.0
Total Split (%)	23.4%	23.4%
Maximum Green (s)	24.1	24.1
Yellow Time (s)	4.8	4.8
All-Red Time (s)	5.1	5.1
Lost Time Adjust (s)	0.0	0.0
Total Lost Time (s)	9.9	9.9
Lead/Lag		
Lead-Lag Optimize?		
Vehicle Extension (s)	3.0	3.0
Recall Mode	Max	Max
Walk Time (s)	7.0	7.0
Flash Dont Walk (s)	11.0	11.0
Pedestrian Calls (#/hr)	0	0
Act Effct Green (s)	24.1	24.1
Actuated g/C Ratio	0.17	0.17
v/c Ratio	0.02	0.18
Control Delay	51.0	1.0
Queue Delay	0.0	0.0
Total Delay	51.0	1.0
LOS	D	Α
Approach Delay	56.9	
Approach LOS	E	
Intersection Summary	I Conti	200

DANIELS PARKWAY

I-75 SB RAMP

	1	-	7	-	+	1	1	1	-	1	1	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		ተተተ	7	ă	ተተተ					44		77
Traffic Volume (vph)	0	1888	1548	864	2764	0	0	0	0	279	0	293
Future Volume (vph)	0	1888	1548	864	2764	0	0	0	0	279	0	293
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	1000		0	0		0	0		0
Storage Lanes	0		1	1		0	0		0	2		2
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.91	1.00	1.00	0.91	1.00	1.00	1.00	1.00	0.97	1.00	0.88
Frt			0.850					110.0			11.00	0.850
Fit Protected			0.000	0.950						0.950		0.000
Satd. Flow (prot)	0	5085	1583	1770	5085	0	0	0	0	3433	0	2787
Fit Permitted		0000	1000	0.950	0000				·	0.950		2.0.
Satd. Flow (perm)	0	5085	1583	1770	5085	0	0	0	0	3433	0	2787
Right Turn on Red		0000	Yes	1110	0000	Yes		·	Yes	0100	·	Yes
Satd. Flow (RTOR)			231			100			100			86
Link Speed (mph)		30	201		50			30			30	00
Link Opeed (mph) Link Distance (ft)		1055			1869			697			1230	
Travel Time (s)		24.0			25.5			15.8			28.0	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0.32	2052	1683	939	3004	0.32	0.32	0.52	0.52	303	0.52	318
Shared Lane Traffic (%)	U	2002	1005	303	3004	U	U	U	U	303	U	010
Lane Group Flow (vph)	0	2052	1683	939	3004	0	0	0	0	303	0	318
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)	Leit	12	Night	Leit	12	ragin	Leit	24	ragin	Lon	24	ragin
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane		10			10			10			10	
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
	1.00	1.00	9	1.00	1.00	9	1.00	1.00	9	1.00	1.00	9
Turning Speed (mph) Number of Detectors	10	2	1	1	2	9	10		9	1		1
Detector Template		Thru	-	Left	Thru					Left		Dight
Leading Detector (ft)		100	Right 20	20	100					20		Right 20
Trailing Detector (ft)		0	0	0	0					0		0
		0	0	0	0					0		0
Detector 1 Position(ft)		6	20	20	6					20		20
Detector 1 Size(ft)		CI+Ex	CI+Ex	CI+Ex	CI+Ex					CI+Ex		CI+Ex
Detector 1 Type Detector 1 Channel		CITEX	CITEX	CITEX	CITEX					CITEX		CITEX
		0.0	0.0	0.0	0.0					0.0		0.0
Detector 1 Extend (s)		0.0	0.0	0.0	0.0					0.0		0.0
Detector 1 Queue (s)		0.0	0.0	0.0	0.0					0.0		0.0
Detector 1 Delay (s)		0.0	0.0	0.0	0.0					0.0		0.0
Detector 2 Position(ft)		94			94							
Detector 2 Size(ft)		6			6							
Detector 2 Type		CI+Ex			CI+Ex							
Detector 2 Channel		0.0			0.0							
Detector 2 Extend (s)		0.0	_	-	0.0							
Turn Type		NA	Perm	Prot	NA					Prot		Prot
Protected Phases		6	100	5	2					3		3
Permitted Phases			6									

	1	-	-	1	4-	1	1	1	1	1	1	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase		6	6	5	2		-			3		3
Switch Phase												
Minimum Initial (s)		5.0	5.0	5.0	5.0					5.0		5.0
Minimum Split (s)		25.4	25.4	12.4	25.4					14.5		14.5
Total Split (s)		85.0	85.0	48.0	133.0					17.0		17.0
Total Split (%)		56.7%	56.7%	32.0%	88.7%					11.3%		11.3%
Maximum Green (s)		77.6	77.6	40.6	125.6					10.5		10.5
Yellow Time (s)		5.1	5.1	5.1	5.1					4.0		4.0
All-Red Time (s)		2.3	2.3	2.3	2.3					2.5		2.5
Lost Time Adjust (s)		0.0	0.0	0.0	0.0					0.0		0.0
Total Lost Time (s)		7.4	7.4	7.4	7.4					6.5		6.5
Lead/Lag		Lag	Lag	Lead								
Lead-Lag Optimize?		Yes	Yes	Yes								
Vehicle Extension (s)		3.0	3.0	3.0	3.0					3.0		3.0
Recall Mode		C-Max	C-Max	None	C-Max					None		None
Walk Time (s)		7.0	7.0		7.0							
Flash Dont Walk (s)		11.0	11.0		11.0							
Pedestrian Calls (#/hr)		0	0		0							
Act Effct Green (s)		77.6	77.6	40.6	125.6					10.5		10.5
Actuated g/C Ratio		0.52	0.52	0.27	0.84					0.07		0.07
v/c Ratio		0.78	1.81	1.96	0.71					1.26		1.16
Control Delay		21.8	385.5	468.9	6.0					200.4		145.7
Queue Delay		0.0	0.1	0.0	0.0					0.0		0.0
Total Delay		21.8	385.7	468.9	6.0					200.4		145.7
LOS		C	F	F	A					F		F
Approach Delay		185.8			116.2						172.4	
Approach LOS		F			F						F	
Intersection Summary		Sid.	515									-41
Area Type:	Other											
Cycle Length: 150												
Actuated Cycle Length: 150												
Offset: 0 (0%), Referenced to	phase 2	:WBTU a	nd 6:EBT	Start of	Green							
Natural Cycle: 150												
Control Type: Actuated-Coor	dinated											

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 1.96

Intersection Signal Delay: 151.7
Intersection Capacity Utilization 156.1%

Intersection LOS: F
ICU Level of Service H

Analysis Period (min) 15


Splits and Phases: 4: I-75 SB Ramp & Daniels Pkwy



	1	→	1	1	-		1	1	-	1	1	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		ተተተ	7	Ä	十十十					44		77
Traffic Volume (vph)	0	3795	613	525	2858	0	0	0	0	241	0	484
Future Volume (vph)	0	3795	613	525	2858	0	0	0	0	241	0	484
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	1000		0	0		0	0	10,00	0
Storage Lanes	0		1	1		0	0		0	2		2
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.91	1.00	1.00	0.91	1.00	1.00	1.00	1.00	0.97	1.00	0.88
Frt			0.850									0.850
Fit Protected				0.950						0.950		
Satd. Flow (prot)	0	5085	1583	1770	5085	0	0	0	0	3433	0	2787
Flt Permitted				0.950	0.555					0.950		
Satd. Flow (perm)	0	5085	1583	1770	5085	0	0	0	0	3433	0	2787
Right Turn on Red			Yes			Yes	- 1		Yes			Yes
Satd. Flow (RTOR)			267									89
Link Speed (mph)		30			50			30			30	
Link Distance (ft)		1055			1869			697			1230	
Travel Time (s)		24.0			25.5			15.8			28.0	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	4125	666	571	3107	0	0	0	0	262	0	526
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	4125	666	571	3107	0	0	0	0	262	0	526
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12	3		12	3		24			24	,
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors		2	1	1	2					1		1
Detector Template		Thru	Right	Left	Thru					Left		Right
Leading Detector (ft)		100	20	20	100					20		20
Trailing Detector (ft)		0	0	0	0					0		0
Detector 1 Position(ft)		0	0	0	0					0		0
Detector 1 Size(ft)		6	20	20	6					20		20
Detector 1 Type		CI+Ex	CI+Ex	CI+Ex	CI+Ex					CI+Ex		CI+Ex
Detector 1 Channel												
Detector 1 Extend (s)		0.0	0.0	0.0	0.0					0.0		0.0
Detector 1 Queue (s)		0.0	0.0	0.0	0.0					0.0		0.0
Detector 1 Delay (s)		0.0	0.0	0.0	0.0					0.0		0.0
Detector 2 Position(ft)		94			94							
Detector 2 Size(ft)		6			6							
Detector 2 Type		CI+Ex			CI+Ex							
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0							
Turn Type		NA	Perm	Prot	NA					Prot		Prot
Protected Phases		6		5	2					3		3
Permitted Phases		18	6									

	<u> </u>		-	-	*	1	1	-	1	1	1
Lane Group	EBL EF	T EB	R WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase		6	6 5	2					3		3
Switch Phase											
Minimum Initial (s)	5	.0 5.	0 5.0	5.0					5.0		5.0
Minimum Split (s)	25	.4 25.	4 12.4	25.4					14.5		14.5
Total Split (s)	87	.0 87.	0 35.0	122.0					23.0		23.0
Total Split (%)	60.0	% 60.09	6 24.1%	84.1%					15.9%		15.9%
Maximum Green (s)	79	.6 79.	6 27.6	114.6					16.5		16.5
Yellow Time (s)	5	.1 5.	1 5.1	5.1					4.0		4.0
All-Red Time (s)	2	.3 2.	3 2.3	2.3					2.5		2.5
Lost Time Adjust (s)	0	.0 0.	0.0	0.0					0.0		0.0
Total Lost Time (s)	7	.4 7.	4 7.4	7.4					6.5		6.5
Lead/Lag	La	ig La	g Lead								
Lead-Lag Optimize?	Ye	es Ye	s Yes								
Vehicle Extension (s)	3	.0 3.	0 3.0	3.0					3.0		3.0
Recall Mode	C-Ma	x C-Ma	x None	C-Max					None		None
Walk Time (s)	7	.0 7.	0	7.0							
Flash Dont Walk (s)	11	.0 11.	0	11.0							
Pedestrian Calls (#/hr)		0	0	0							
Act Effct Green (s)	79	6 79.	6 27.6	114.6					16.5		16.5
Actuated g/C Ratio	0.5	5 0.5	5 0.19	0.79					0.11		0.11
v/c Ratio	1.4	8 0.6	7 1.70	0.77					0.67		1.33
Control Delay	235	7 6.	5 362.1	9.9					70.9		203.6
Queue Delay	0	.0 0.	0.0	0.0					0.0		0.0
Total Delay	235	7 6.	5 362.1	9.9					70.9		203.6
LOS		F .	A F	A					E		F
Approach Delay	203	.8		64.6						159.5	
Approach LOS		F		E						F	
Intersection Summary					200						
Area Type: Oth	er										
Cycle Length: 145											
Actuated Cycle Length: 145											
Offset: 0 (0%), Referenced to p	hase 2:WBTU	and 6:EE	BT, Start of	Green							
Natural Cycle: 150											
Control Type: Actuated-Coording	nated										
Maximum v/c Ratio: 1.70											
Intersection Signal Delay: 144.7				ntersection							
Intersection Capacity Utilization	125.0%			CU Level	of Service	H					
Analysis Period (min) 15											





	1	-	*	1	+	1	1	1	-	1	1	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		ተተተ	7	ă	ተተተ					44		77
Traffic Volume (vph)	0	1903	1578	864	2770	0	0	0	0	279	0	299
Future Volume (vph)	0	1903	1578	864	2770	0	0	0	0	279	0	299
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	1000	100,000	0	0	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	0	0		0
Storage Lanes	0		1	1		0	0		0	2		2
Taper Length (ft)	25			25			25			25		-
Lane Util. Factor	1.00	0.91	1.00	1.00	0.91	1.00	1.00	1.00	1.00	0.97	1.00	0.88
Frt	1.00	0.01	0.850	1.00	0.01	1.00	1.00	1.00	1.00	0.01	1.00	0.850
Fit Protected			0.000	0.950						0.950		0.000
Satd. Flow (prot)	0	5085	1583	1770	5085	0	0	0	0	3433	0	2787
Flt Permitted	U	3003	1000	0.950	3003	U	U	U	U	0.950	U	2101
Satd. Flow (perm)	0	5085	1583	1770	5085	0	0	0	0	3433	0	2787
	U	5005	Yes	1770	5005	Yes	U	U	Yes	3433	U	
Right Turn on Red		537		_		Tes			res			Yes
Satd. Flow (RTOR)		20	231		F0			20			00	86
Link Speed (mph)		30			50			30			30	
Link Distance (ft)		1055			1869			697			1230	
Travel Time (s)	0.00	24.0			25.5			15.8			28.0	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	2068	1715	939	3011	0	0	0	0	303	0	325
Shared Lane Traffic (%)		Solvio	Transaction of the Control of the Co		ver.					20.416		-
Lane Group Flow (vph)	0	2068	1715	939	3011	0	0	0	0	303	0	325
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			24			24	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors		2	1	1	2					1		1
Detector Template		Thru	Right	Left	Thru					Left		Right
Leading Detector (ft)		100	20	20	100					20		20
Trailing Detector (ft)		0	0	0	0					0		0
Detector 1 Position(ft)		0	0	0	0					0		0
Detector 1 Size(ft)		6	20	20	6					20		20
Detector 1 Type		CI+Ex	CI+Ex	CI+Ex	CI+Ex					CI+Ex		CI+Ex
Detector 1 Channel												
Detector 1 Extend (s)		0.0	0.0	0.0	0.0					0.0		0.0
Detector 1 Queue (s)		0.0	0.0	0.0	0.0					0.0		0.0
Detector 1 Delay (s)		0.0	0.0	0.0	0.0					0.0		0.0
Detector 2 Position(ft)		94	0.0	0.0	94					0.0		0.0
Detector 2 Size(ft)		6			6							
Detector 2 Type		CI+Ex			CI+Ex							
Detector 2 Channel		OI. LX			OILLY							
Detector 2 Extend (s)		0.0			0.0							
		NA	Perm	Drot	NA					Prot		Drot
Turn Type Protected Phases			Pelli	Prot 5	2					Prot 3		Prot
AND THE PROPERTY OF THE PARTY O		6	0	5	2					3		3
Permitted Phases			6									

	<u>ه</u> ـ	. >	1	-	*	1	1	1	1	1	1
Lane Group	EBL EB	T EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBF
Detector Phase		6 6	5	2	100				3		
Switch Phase											
Minimum Initial (s)	5	0 5.0	5.0	5.0					5.0		5.0
Minimum Split (s)	25	4 25.4	12.4	25.4					14.5		14.5
Total Split (s)	85	0 85.0	48.0	133.0					17.0		17.0
Total Split (%)	56.7	% 56.7%	32.0%	88.7%					11.3%		11.3%
Maximum Green (s)	77.	6 77.6	40.6	125.6					10.5		10.5
Yellow Time (s)	5	1 5.1	5.1	5.1					4.0		4.0
All-Red Time (s)	2	3 2.3	2.3	2.3					2.5		2.5
Lost Time Adjust (s)	0.			0.0					0.0		0.0
Total Lost Time (s)	7.			7.4					6.5		6.5
Lead/Lag	La		Lead								
Lead-Lag Optimize?	Ye										
Vehicle Extension (s)	3.			3.0					3.0		3.0
Recall Mode	C-Ma			C-Max					None		None
Walk Time (s)	7.			7.0							
Flash Dont Walk (s)	11.			11.0							
Pedestrian Calls (#/hr)		0 0		0							
Act Effct Green (s)	77.			125.6					10.5		10.5
Actuated g/C Ratio	0.5			0.84					0.07		0.07
v/c Ratio	0.7		1.96	0.71					1.26		1.18
Control Delay	24.			6.0					200.4		154.4
Queue Delay	0.		0.0	0.0					0.0		0.0
Total Delay	24.			6.0					200.4		154.4
LOS		C F	F	A					F		F
Approach Delay	195.			116.0						176.6	,
Approach LOS		F		F						F	
ntersection Summary	1	Carl I			allenes.	7-41				Ti S	-
Area Type: Othe	er										
Cycle Length: 150											
Actuated Cycle Length: 150											
Offset: 0 (0%), Referenced to ph	ase 2:WBTU	and 6:EB	T, Start of	Green							
Natural Cycle: 150											
Control Type: Actuated-Coordinated	ated										
Maximum v/c Ratio: 1.96											
ntersection Signal Delay: 156.7			1	ntersection	LOS: F						
ntersection Capacity Utilization	157.9%		- 1	CU Level	of Service	H					
Analysis Period (min) 15											
Splits and Phases: 4: I-75 SB	Ramp & Dar	iels Pkwv									
4-										1	
Ø2 (R)										100	3

₩Ø6 (R)

ÿ5

	1	-	-	1	-	1	1	1	-	1	1	1
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		ተተተ	7	Ä	ተተተ					1/4		77
Traffic Volume (vph)	0	3805	624	525	2888	0	0	0	0	241	0	499
Future Volume (vph)	0	3805	624	525	2888	0	0	0	0	241	0	499
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0	1000	0	1000	1000	0	0		0	0	,,,,,	0
Storage Lanes	0		1	1		0	0		0	2		2
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.91	1.00	1.00	0.91	1.00	1.00	1.00	1.00	0.97	1.00	0.88
Frt			0.850									0.850
Flt Protected			0.000	0.950						0.950		0.000
Satd. Flow (prot)	0	5085	1583	1770	5085	0	0	0	0	3433	0	2787
Fit Permitted		0000	1000	0.950	0000					0.950		2.0.
Satd. Flow (perm)	0	5085	1583	1770	5085	0	0	0	0	3433	0	2787
Right Turn on Red		0000	Yes	1110	0000	Yes			Yes	0400	Ü	Yes
Satd. Flow (RTOR)			271			100			100			89
Link Speed (mph)		30	211		50			30			30	0.0
Link Distance (ft)		1055			1869			697			1230	
Travel Time (s)		24.0			25.5			15.8			28.0	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0.32	4136	678	571	3139	0.52	0.52	0.32	0.52	262	0.52	542
Shared Lane Traffic (%)	U	4100	010	011	0100	U	U	U	U	202	U	042
Lane Group Flow (vph)	0	4136	678	571	3139	0	0	0	0	262	0	542
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)	Lon	12	ragin	Lon	12	ragin	Lon	24	rugin	LOIL	24	ragin
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane		10			10			10			10	
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15	1.00	9	15	1.00	9	15	1.00	9	15	1.00	9
Number of Detectors	10	2	1	1	2	U	10			1		1
Detector Template		Thru	Right	Left	Thru				- T	Left		Right
Leading Detector (ft)		100	20	20	100					20		20
Trailing Detector (ft)		0	0	0	0					0		0
Detector 1 Position(ft)		0	0	0	0					0		0
Detector 1 Size(ft)		6	20	20	6					20		20
Detector 1 Type		CI+Ex	CI+Ex	CI+Ex	CI+Ex					CI+Ex		CI+Ex
Detector 1 Channel		OILLA	OTILX	OTILA	OITEX					OI LA		OI LX
Detector 1 Extend (s)		0.0	0.0	0.0	0.0					0.0		0.0
Detector 1 Queue (s)		0.0	0.0	0.0	0.0					0.0		0.0
Detector 1 Delay (s)		0.0	0.0	0.0	0.0					0.0		0.0
Detector 2 Position(ft)		94	0.0	0.0	94					0.0		0.0
Detector 2 Size(ft)		6			6							
Detector 2 Type		Cl+Ex			CI+Ex							
Detector 2 Channel		OITEX			OITEX							
Detector 2 Extend (s)		0.0			0.0							
Turn Type		NA	Perm	Prot	NA					Prot		Prot
Protected Phases		6	I CIIII	5	2					3		3
Permitted Phases		0	6	0	2					3		3

	→	7	1	-	-	1	1	-	1	+	1
Lane Group	EBL EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBF
Detector Phase	6	6	5	2	19.00				3		3
Switch Phase											
Minimum Initial (s)	5.0	5.0	5.0	5.0					5.0		5.0
Minimum Split (s)	25.4	25.4	12.4	25.4					14.5		14.5
Total Split (s)	87.0	87.0	35.0	122.0					23.0		23.0
Total Split (%)	60.0%	60.0%	24.1%	84.1%					15.9%		15.9%
Maximum Green (s)	79.6	79.6	27.6	114.6					16.5		16.5
Yellow Time (s)	5.1	5.1	5.1	5.1					4.0		4.0
All-Red Time (s)	2.3	2.3	2.3	2.3					2.5		2.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0					0.0		0.0
Total Lost Time (s)	7.4	7.4	7.4	7.4					6.5		6.5
Lead/Lag	Lag	Lag	Lead								
Lead-Lag Optimize?	Yes	Yes	Yes								
Vehicle Extension (s)	3.0	3.0	3.0	3.0					3.0		3.0
Recall Mode	C-Max		None	C-Max					None		None
Walk Time (s)	7.0	7.0	110110	7.0					Hono		Hone
Flash Dont Walk (s)	11.0	11.0		11.0							
Pedestrian Calls (#/hr)	0	0		0							
Act Effct Green (s)	79.6	79.6	27.6	114.6					16.5		16.5
Actuated g/C Ratio	0.55	0.55	0.19	0.79					0.11		0.11
v/c Ratio	1.48	0.68	1.70	0.78					0.67		1.37
Control Delay	237.7	7.2	362.1	10.1					70.9		219.7
Queue Delay	0.0	0.0	0.0	0.0					0.0		0.0
Total Delay	237.7	7.2	362.1	10.1					70.9		219.7
LOS	F	A	F	В					E		F
Approach Delay	205.3	-	-	64.3					-	171.2	-
Approach LOS	F			E						F	
Intersection Summary											
Area Type: Oth	er	_					IGI				-
Cycle Length: 145											
Actuated Cycle Length: 145											
Offset: 0 (0%), Referenced to p	hase 2:WBTU a	nd 6:FBT	Start of	Green							
Natural Cycle: 150	11000 2.11310 0	ila o.Eb i	Otario	010011							
Control Type: Actuated-Coordin	nated										
Maximum v/c Ratio: 1.70	latod										
Intersection Signal Delay: 146.3	3		li li	ntersection	LOS: F						
Intersection Capacity Utilization					of Service	Н					
Analysis Period (min) 15	120.170			OO LOVOI (or oct vioc						
California Dhanno A. 1.75 CC	Doma (Donie	la Diama									
Splits and Phases: 4: I-75 SE	3 Ramp & Danie	is PKWy							14		
Ø2 (R)	V								1	Ø3	
lies.							-		1138	1	

Ø6 (R)

√ Ø5

THREE OAKS PARKWAY

(a)

DANIELS TOWN CENTER ACCESS

04/16/2024

	¥	×	2	-	×	*	7	*	~	6	K	×
Lane Group	SEL	SET	SER	NWL	NWT	NWR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations	7	44	7	ሻ	ተተ	7	7	^	7	7	4	7
Traffic Volume (vph)	34	332	54	27	354	26	40	0	16	104	0	312
Future Volume (vph)	34	332	54	27	354	26	40	0	16	104	0	312
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	450	1000	400	450	1000	400	200	,,,,,,	0	200	1,000	0
Storage Lanes	1		1	1		1	1		1	1		1
Taper Length (ft)	25		- 1	25			25			25		
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1,00	0.00	0.850	1.00	0.00	0.850	1,00	1.00	0.850	1.00	1.00	0.850
Flt Protected	0.950		0.000	0.950		0.000	0.950		0.000	0.950		0.000
Satd. Flow (prot)	1770	3539	1583	1770	3539	1583	1770	1863	1583	1770	1863	1583
Flt Permitted		3039	1000	0.536	3339	1303	0.757	1003	1565	0.574	1000	1000
40 - 41 - 12 8 - 44 - 12 - 12 - 12 - 12 - 12 - 12 - 12	0.428 797	2520	1583	998	2520	1583	1410	1863	1583	1069	1863	1583
Satd. Flow (perm)	191	3539		990	3539		1410	1003		1009	1003	
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		20	182		20	182		20	524		20	522
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		392			1222			646			802	_
Travel Time (s)		8.9			27.8			14.7			18.2	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	37	361	59	29	385	28	43	0	17	113	0	339
Shared Lane Traffic (%)		750	-									TARREST OF
Lane Group Flow (vph)	37	361	59	29	385	28	43	0	17	113	0	339
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	60		60	60		60	60		60	60		60
Turn Type	pm+pt	NA	Perm	pm+pt	NA	Perm	pm+pt		Perm	pm+pt		Perm
Protected Phases	1	6		5	2		7	4		3	8	
Permitted Phases	6		6	2		2	4		4	8		8
Minimum Split (s)	12.0	25.0	25.0	12.0	29.0	29.0	12.0	25.0	25.0	12.0	25.0	25.0
Total Split (s)	23.0	64.0	64.0	18.0	59.0	59.0	28.0	29.0	29.0	39.0	40.0	40.0
Total Split (%)	15.3%	42.7%	42.7%	12.0%	39.3%	39.3%	18.7%	19.3%	19.3%	26.0%	26.7%	26.7%
Maximum Green (s)	16.0	57.0	57.0	11.0	52.0	52.0	21.0	22.0	22.0	32.0	33.0	33.0
Yellow Time (s)	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
All-Red Time (s)	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Walk Time (s)	100	7.0	7.0	100	7.0	7.0	100	7.0	7.0	, 00	7.0	7.0
Flash Dont Walk (s)		11.0	11.0		11.0	11.0		11.0	11.0		11.0	11.0
Pedestrian Calls (#/hr)		0	0		0	0		0	0		0	0
Act Effet Green (s)	73.0	57.0	57.0	63.0	52.0	52.0	43.0	Ü	22.0	61.0	U	33.0
The State of the S	0.49	0.38	0.38	0.42	0.35	0.35	0.29		0.15	0.41		0.22
Actuated g/C Ratio										4,511,00		
v/c Ratio	0.08	0.27	0.08	0.06	0.31	0.04	0.09		0.03	0.19		0.45

C

A

1.9 0.0 1.9 A

	w/	×	1	-	K	*	7	*	~	6	×
Lane Group	SEL	SET	SER	NWL	NWT	NWR	NEL	NET	NER	SWL	SWT
Control Delay	19.7	32.8	0.2	20.0	36.8	0.1	28.9		0.1	29.3	
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0		0.0	0.0	
Total Delay	19.7	32.8	0.2	20.0	36.8	0.1	28.9		0.1	29.3	
LOS	В	С	Α	В	D	Α	C		Α	C	
Approach Delay		27.5			33.4			20.7			8.8

Intersection Summary

Area Type: Other

Cycle Length: 150

Approach LOS

Actuated Cycle Length: 150

Offset: 0 (0%), Referenced to phase 2:NWTL and 6:SETL, Start of Green

C


Natural Cycle: 80 Control Type: Pretimed Maximum v/c Ratio: 0.45 Intersection Signal Delay: 23.1 Intersection Capacity Utilization 50.8%

Intersection LOS: C
ICU Level of Service A

C

Analysis Period (min) 15


Splits and Phases: 14: Three Oaks Pkwy & Daniels Town Center



	4	×	2	-	K		7	×	~	6	K	*
Lane Group	SEL	SET	SER	NWL	NWT	NWR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations	7	44	7	7	44	7	7	1	N	*	1	71
Traffic Volume (vph)	122	308	106	40	407	56	101	0	37	43	0	125
Future Volume (vph)	122	308	106	40	407	56	101	0	37	43	0	125
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	450	1000	400	450	1000	400	200	1000	0	200	1000	0
Storage Lanes	1		1	1		1	1		1	1		1
Taper Length (ft)	25			25			25		- '	25		
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.55	0.850	1.00	0.55	0.850	1.00	1.00	0.850	1.00	1.00	0.850
Flt Protected	0.950		0.000	0.950		0.000	0.950		0.000	0.950		0.000
Satd. Flow (prot)	1770	3539	1583	1770	3539	1583	1770	1863	1583	1770	1863	1583
Flt Permitted	0.350	3339	1000	0.550	3339	1000	0.757	1003	1303	0.561	1003	1000
Section of the Control of the Contro		2520	1583		2520	1583		1000	1583		1000	1502
Satd. Flow (perm)	652	3539		1025	3539		1410	1863		1045	1863	1583
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		00	188		00	241		00	602		00	398
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		392			1222			646			802	
Travel Time (s)		8.9		- 2.22	27.8			14.7	2.22		18.2	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	133	335	115	43	442	61	110	0	40	47	0	136
Shared Lane Traffic (%)												-
Lane Group Flow (vph)	133	335	115	43	442	61	110	0	40	47	0	136
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	60		60	60		60	60		60	60		60
Turn Type	pm+pt	NA	Perm	pm+pt	NA	Perm	pm+pt		Perm	pm+pt		Perm
Protected Phases	1	6		5	2		7	4		3	8	
Permitted Phases	6		6	2		2	4		4	8		8
Minimum Split (s)	12.0	25.0	25.0	12.0	25.0	25.0	12.0	25.0	25.0	12.0	25.0	25.0
Total Split (s)	28.0	63.0	63.0	16.0	51.0	51.0	16.0	27.0	27.0	39.0	50.0	50.0
Total Split (%)	19.3%	43.4%	43.4%	11.0%	35.2%	35.2%	11.0%	18.6%	18.6%	26.9%	34.5%	34.5%
Maximum Green (s)	21.0	56.0	56.0	9.0	44.0	44.0	9.0	20.0	20.0	32.0	43.0	43.0
Yellow Time (s)	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
All-Red Time (s)	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0
Lead/Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Walk Time (s)	163	7.0	7.0	100	7.0	7.0	100	7.0	7.0	163	7.0	7.0
Flash Dont Walk (s)		11.0	11.0		11.0	11.0		11.0	11.0		11.0	11.0
		0	0		0	0		0	0		0	0
Pedestrian Calls (#/hr)	72.0			53.0	44.0	44.0	29.0	U		59.0	U	
Act Effct Green (s)	72.0	56.0	56.0						20.0			43.0
Actuated g/C Ratio	0.50	0.39	0.39	0.37	0.30	0.30	0.20		0.14	0.41		0.30
v/c Ratio	0.27	0.25	0.16	0.10	0.41	0.09	0.36		0.05	0.08		0.18

	4	×	2	-	×	*	7	×	1	6	K	*
Lane Group	SEL	SET	SER	NWL	NWT	NWR	NEL	NET	NER	SWL	SWT	SWR
Control Delay	21.5	30.8	0.5	20.8	41.6	0.3	34.6		0.1	26.7		0.5
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0		0.0	0.0		0.0
Total Delay	21.5	30.8	0.5	20.8	41.6	0.3	34.6		0.1	26.7		0.5
LOS	С	C	Α	С	D	Α	C		Α	С		А
Approach Delay		22.7			35.4			25.4			7.3	
Approach LOS		C			D			C			Α	
Intersection Summary	No.	Rig	994								22	
Area Type:	Other			-								
Cycle Length: 145												
Actuated Cycle Length: 1	45											
Offset: 0 (0%), Reference	ed to phase 2:1	WTL and	6:SETL	, Start of	Green							
Natural Cycle: 75												
Control Type: Pretimed												
Maximum v/c Ratio: 0.41												
Intersection Signal Delay	: 25.8			In	tersection	LOS: C						
Intersection Capacity Util	ization 47.8%			IC	U Level	of Service	Α					
Analysis Period (min) 15					1000							

Splits and Phases: 14: Three Oaks Pkwy & Daniels Town Center



THREE OAKS PARKWAY EXTENSION DESIGN PROJECT TRAFFIC ANALYSIS REPORT EXCERPTS McCORMICK TAYLOR

THREE OAKS PARKWAY EXTENSION DESIGN PROJECT

TRAFFIC ANALYSIS REPORT

April 2020

Prepared by:



1404 Dean Street, Suite 200 First Myers, FL 33901

Prepared for:



1500 Monroe Street Fort Myers, FL 33901

	1	-	-	+	1	1	1	1	1	1	
Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations	37	titi	Ä	tttp	7	1	7	7	1	7	
Traffic Volume (vph)	69	1968	114	2511	30	11	125	132	5	99	
Future Volume (vph)	69	1968	114	2511	30	11	125	132	5	99	
Turn Type	Prot	NA	Prot	NA	Perm	NA	Perm	Perm	NA	Perm	
Protected Phases	1	6	5	2		4			8		
Permitted Phases					4	4	4	8	8	8	
Detector Phase	1	6	5	2	4	4	4	8	8	8	
Switch Phase											
Minimum Initial (s)	7.0	15.0	7.0	15.0	8.0	8.0	8.0	8.0	8.0	8.0	
Minimum Split (s)	15.6	24.0	15.6	24.0	17.9	17.9	17.9	17.9	17.9	17.9	
Total Split (s)	71.0	42.0	71.0	42.0	37.0	37.0	37.0	37.0	37.0	37.0	
Total Split (%)	47.3%	28.0%	47.3%	28.0%	24.7%	24.7%	24.7%	24.7%	24.7%	24.7%	
Yellow Time (s)	3.4	4.8	3.4	4.8	4.8	4.8	4.8	4.8	4.8	4.8	
All-Red Time (s)	5.2	2.4	5.2	2.4	5.1	5.1	5.1	5.1	5.1	5.1	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	8.6	7.2	8.6	7.2	9.9	9.9	9.9	9.9	9.9	9.9	
Lead/Lag	Lead	Lag	Lead	Lag							
Lead-Lag Optimize?											
Recall Mode	None	C-Max	None	C-Max	Max	Max	Max	None	None	None	
Act Effct Green (s)	9.8	79.8	17.4	87.4	27.1	27.1	27.1	27.1	27.1	27.1	
Actuated g/C Ratio	0.07	0.53	0.12	0.58	0.18	0.18	0.18	0.18	0.18	0.18	
v/c Ratio	0.53	0.53	0.73	0.63	0.12	0.03	0.33	0.54	0.01	0.26	
Control Delay	79.4	11.7	77.4	19.1	54.5	53.0	11.2	64.7	50.8	10.9	
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Total Delay	79.4	11.7	77.4	19.1	54.5	53.0	11.2	64.7	50.8	10.9	
LOS	E	В	E	В	D	D	В	E	D	В	
Approach Delay		15.5		22.2		21.8			41.8		
Approach LOS		В		C		C			D		

Cycle Length: 150 Actuated Cycle Length: 150

Offset: 2 (1%), Referenced to phase 2:WBT and 6:EBT, Start of Green


Natural Cycle: 70

Control Type: Actuated-Coordinated Maximum v/c Ratio: 0.73

Intersection Signal Delay: 20.4
Intersection Capacity Utilization 86.8%

Analysis Period (min) 15

Intersection LOS: C
ICU Level of Service E



	-	*	1	-	1	1	
Lane Group	EBT	EBR	WBL	WBT	SBL	SBR	
Lane Configurations	^	7	ă	ተተተ	44	77	
Traffic Volume (vph)	1929	332	573	2115	599	700	
Future Volume (vph)	1929	332	573	2115	599	700	
Turn Type	NA	Perm	Prot	NA	Prot	Prot	
Protected Phases	6		5	2	3	3	
Permitted Phases		6			3		
Detector Phase	6	6	5	2	3	3	
Switch Phase							
Minimum Initial (s)	15.0	15.0	7.0	15.0	8.0	8.0	
Minimum Split (s)	24.0	24.0	15.0	24.0	16.0	16.0	
Total Split (s)	59.0	59.0	56.0	115.0	35.0	35.0	
Total Split (%)	39.3%	39.3%	37.3%	76.7%	23.3%	23.3%	
Yellow Time (s)	5.1	5.1	5.1	5.1	4.0	4.0	
All-Red Time (s)	2.3	2.3	2.0	2.3	2.5	2.5	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	7.4	7.4	7.1	7.4	6.5	6.5	
Lead/Lag	Lead	Lead	Lag				
Lead-Lag Optimize?							
Recall Mode	C-Max	C-Max	None	C-Max	None	None	
Act Effct Green (s)	51.6	51.6	48.9	107.6	28.5	28.5	
Actuated g/C Ratio	0.34	0.34	0.33	0.72	0.19	0.19	
v/c Ratio	1.04	0.50	1.09	0.54	0.96	1.13	
Control Delay	57.0	7.1	110.1	7.5	87.1	124.0	
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	
Total Delay	57.0	7.1	110.1	7.5	87.1	124.0	
LOS	E	A	F	A	F	F	
Approach Delay	49.7			30.6			
Approach LOS	D			C			
Intersection Summary	TO STORY		11.46	-		Chief	

Actuated Cycle Length: 150

Offset: 148 (99%), Referenced to phase 2:WBT and 6:EBT, Start of Green

Natural Cycle: 150

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 1.13


Intersection Signal Delay: 53.2


Intersection Capacity Utilization 101.5%

Analysis Period (min) 15

Intersection LOS: D

ICU Level of Service G





	1	-	1	4	4	1	-	1	1	1	
Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations	37	tttî:	Ä	ttt	4	1	7	7	1	7	
Traffic Volume (vph)	83	2705	61	2638	32	15	149	168	20	99	
Future Volume (vph)	83	2705	61	2638	32	15	149	168	20	99	
Turn Type	Prot	NA	Prot	NA	Perm	NA	Perm	Perm	NA	Perm	
Protected Phases	1	6	5	2		4			8		
Permitted Phases					4	4	4	8	8	8	
Detector Phase	1	6	5	2	4	4	4	8	8	8	
Switch Phase											
Minimum Initial (s)	7.0	15.0	7.0	15.0	8.0	8.0	8.0	8.0	8.0	8.0	
Minimum Split (s)	16.0	24.0	15.6	24.0	17.9	17.9	17.9	17.9	17.9	17.9	
Total Split (s)	28.0	64.0	28.0	64.0	38.0	38.0	38.0	38.0	38.0	38.0	
Total Split (%)	21.5%	49.2%	21.5%	49.2%	29.2%	29.2%	29.2%	29.2%	29.2%	29.2%	
Yellow Time (s)	3.4	4.8	3.4	4.8	4.8	4.8	4.8	4.8	4.8	4.8	
All-Red Time (s)	5.2	2.4	5.2	2.4	5.1	5.1	5.1	5.1	5.1	5.1	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	8.6	7.2	8.6	7.2	9.9	9.9	9.9	9.9	9.9	9.9	
Lead/Lag	Lead	Lag	Lead	Lag	-						
Lead-Lag Optimize?				3							
Recall Mode	None	C-Max	None	C-Max	Max	Max	Max	None	None	None	
Act Effct Green (s)	9.3	64.3	11.9	66.9	28.1	28.1	28.1	28.1	28.1	28.1	
Actuated g/C Ratio	0.07	0.49	0.09	0.51	0.22	0.22	0.22	0.22	0.22	0.22	
v/c Ratio	0.51	0.78	0.63	0.75	0.11	0.04	0.33	0.56	0.05	0.24	
Control Delay	75.1	8.1	69.2	22.2	42.4	41.1	8.3	53.5	41.0	8.4	
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Total Delay	75.1	8.1	69.2	22.2	42.4	41.1	8.3	53.5	41.0	8.4	
LOS	E	A	E	С	D	D	Α	D	D	A	
Approach Delay		11.0		23.8		16.4			37.1		
Approach LOS		В		C		В			D		

Cycle Length: 130 Actuated Cycle Length: 130

Offset: 112 (86%), Referenced to phase 2:WBT and 6:EBT, Start of Green

Natural Cycle: 80

Control Type: Actuated-Coordinated


Maximum v/c Ratio: 0.78

Intersection Signal Delay: 18.3

Intersection Capacity Utilization 93.1%

Analysis Period (min) 15

Intersection LOS: B
ICU Level of Service F





	-	1	1	4-	1	1	
Lane Group	EBT	EBR	WBL	WBT	SBL	SBR	
Lane Configurations	^	7	Ä	ተተተ	44	77	
Traffic Volume (vph)	2608	452	472	2396	237	514	
Future Volume (vph)	2608	452	472	2396	237	514	
Turn Type	NA	Perm	Prot	NA	Prot	Prot	
Protected Phases	6		5	2	3	3	
Permitted Phases		6			3		
Detector Phase	6	6	5	2	3	3	
Switch Phase							
Minimum Initial (s)	15.0	15.0	7.0	15.0	8.0	8.0	
Minimum Split (s)	24.0	24.0	15.0	24.0	16.0	16.0	
Total Split (s)	67.0	67.0	41.0	108.0	22.0	22.0	
Total Split (%)	51.5%	51.5%	31.5%	83.1%	16.9%	16.9%	
Yellow Time (s)	5.1	5.1	5.1	5.1	4.0	4.0	
All-Red Time (s)	2.3	2.3	2.0	2.3	2.5	2.5	
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	7.4	7.4	7.1	7.4	6.5	6.5	
Lead/Lag	Lead	Lead	Lag				
Lead-Lag Optimize?							
Recall Mode	C-Max	C-Max	None	C-Max	None	None	
Act Effct Green (s)	59.6	59.6	33.9	100.6	15.5	15.5	
Actuated g/C Ratio	0.46	0.46	0.26	0.77	0.12	0.12	
v/c Ratio	1.02	0.52	1.06	0.55	0.63	1.14	
Control Delay	37.0	2.2	104.3	4.6	62.7	127.0	
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	
Total Delay	37.0	2.2	104.3	4.6	62.7	127.0	
LOS	D	A	F	Α	Е	F	
Approach Delay	31.8			21.2			
Approach LOS	С			C			

Cycle Length: 130 Actuated Cycle Length: 130


Offset: 128 (98%), Referenced to phase 2:WBT and 6:EBT, Start of Green

Natural Cycle: 130


Control Type: Actuated-Coordinated Maximum v/c Ratio: 1.14 Intersection Signal Delay: 35.7 Intersection Capacity Utilization 96.9% Analysis Period (min) 15

Intersection LOS: D ICU Level of Service F


Splits and Phases: 120: I-75 SB On-Ramp/I-75 SB Off-Ramp & Daniels Pkwy






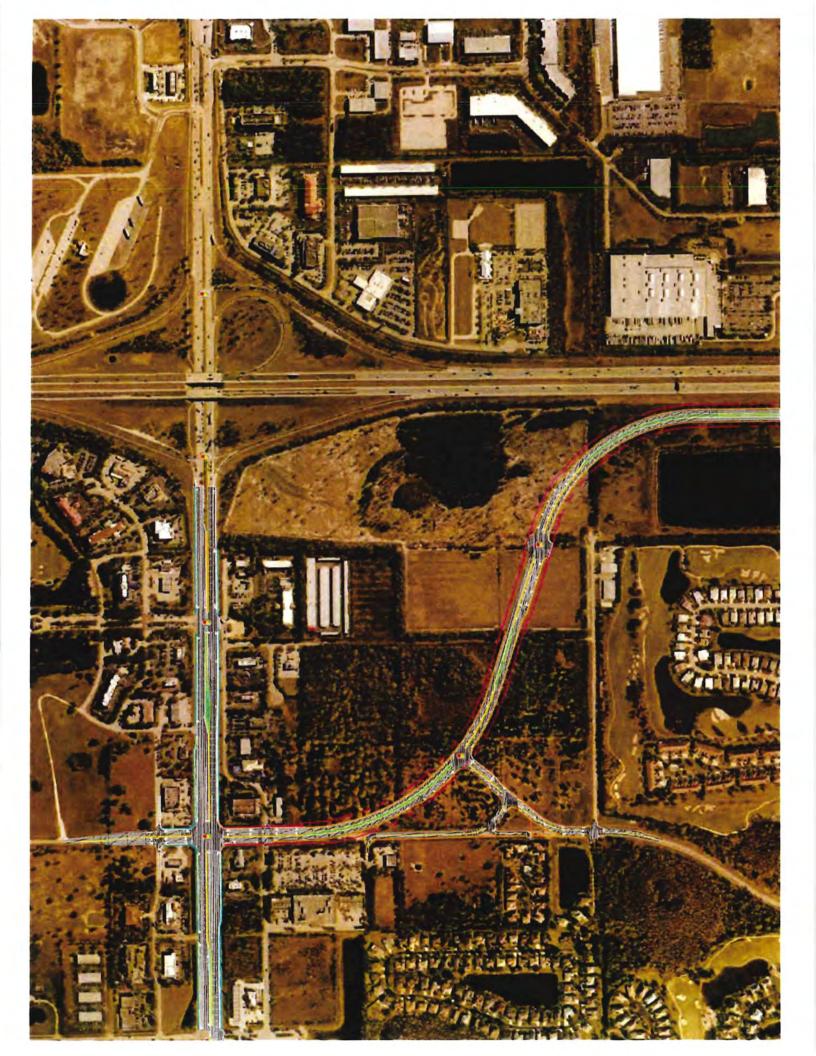

DEVELOPMENT OF FUTURE BACKGROUND THROUGH VOLUMES ON THREE OAKS PARKWAY

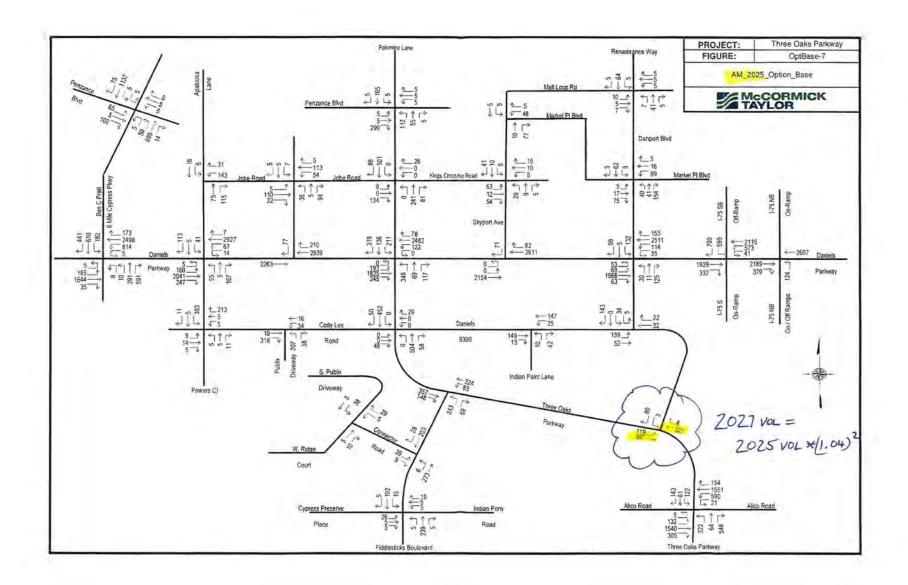

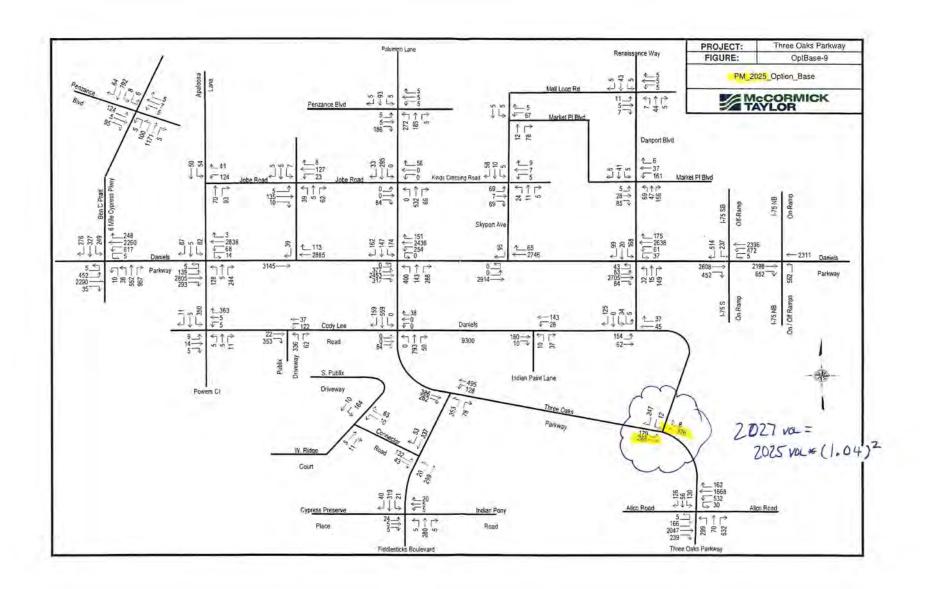



Multifamily Housing (Mid-Rise) Not Close to Rail Transit (221)

Vehicle Trip Ends vs: Dwelling Units On a: Weekday


Setting/Location: General Urban/Suburban

Number of Studies: 11 Avg. Num. of Dwelling Units: 201

Directional Distribution: 50% entering, 50% exiting

Vehicle Trip Generation per Dwelling Unit

Average Rate	Range of Rates	Standard Deviation
4.54	3.76 - 5.40	0,51

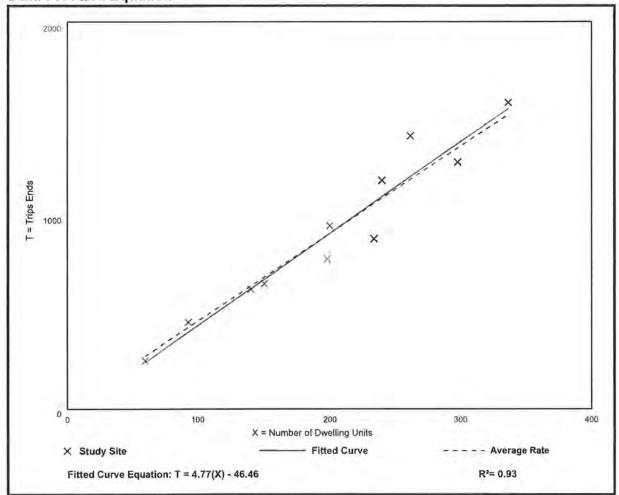

Multifamily Housing (Mid-Rise) Not Close to Rail Transit (221)

Vehicle Trip Ends vs: Dwelling Units

On a: Weekday,

Peak Hour of Adjacent Street Traffic,

One Hour Between 7 and 9 a.m.


Setting/Location: General Urban/Suburban

Number of Studies: 30 Avg. Num. of Dwelling Units: 173

Directional Distribution: 23% entering, 77% exiting

Vehicle Trip Generation per Dwelling Unit

Average Rate	Range of Rates	Standard Deviation
0.37	0.15 - 0.53	0.09

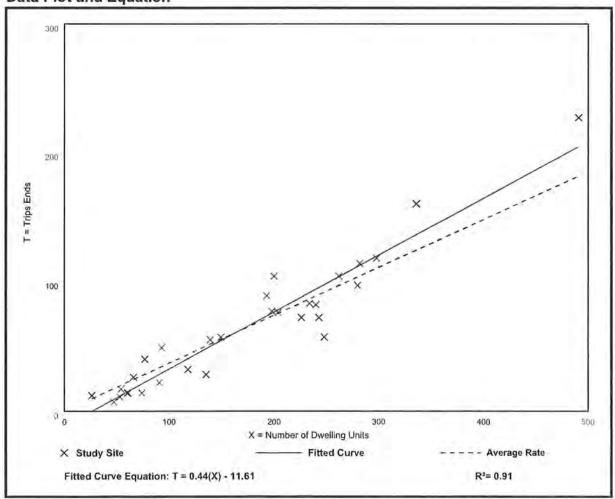



Multifamily Housing (Mid-Rise) Not Close to Rail Transit (221)

Vehicle Trip Ends vs: Dwelling Units

On a: Weekday,

Peak Hour of Adjacent Street Traffic,

One Hour Between 4 and 6 p.m.


Setting/Location: General Urban/Suburban

Number of Studies: 31 Avg. Num. of Dwelling Units: 169

Directional Distribution: 61% entering, 39% exiting

Vehicle Trip Generation per Dwelling Unit

Average Rate	Range of Rates	Standard Deviation
0.39	0.19 - 0.57	0.08

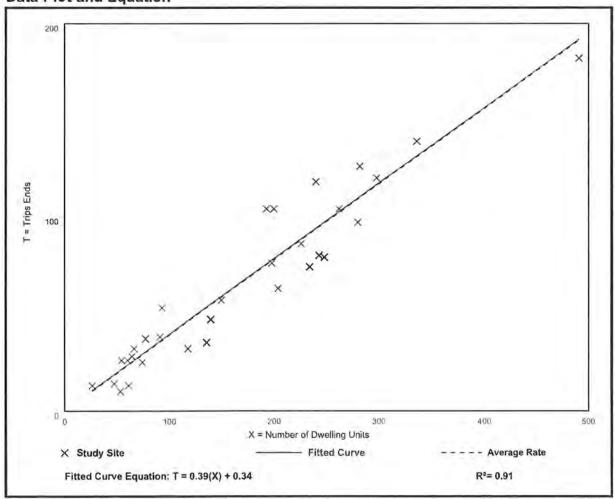

Hotel (310)

Vehicle Trip Ends vs: Rooms On a: Weekday


Setting/Location: General Urban/Suburban

Number of Studies: 7 Avg. Num. of Rooms: 148

Directional Distribution: 50% entering, 50% exiting

Vehicle Trip Generation per Room

Average Rate	Range of Rates	Standard Deviation
7.99	5.31 - 9.53	1.92

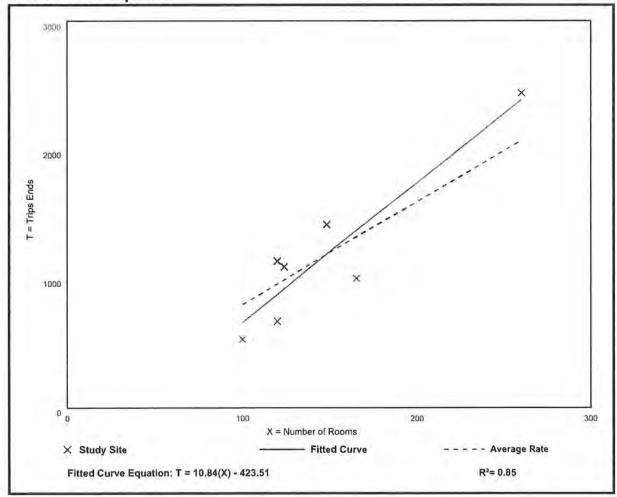

Hotel (310)

Vehicle Trip Ends vs: Rooms

On a: Weekday,

Peak Hour of Adjacent Street Traffic,

One Hour Between 7 and 9 a.m.


Setting/Location: General Urban/Suburban

Number of Studies: 28 Avg. Num. of Rooms: 182

Directional Distribution: 56% entering, 44% exiting

Vehicle Trip Generation per Room

Average Rate	Range of Rates	Standard Deviation
0.46	0.20 - 0.84	0.14

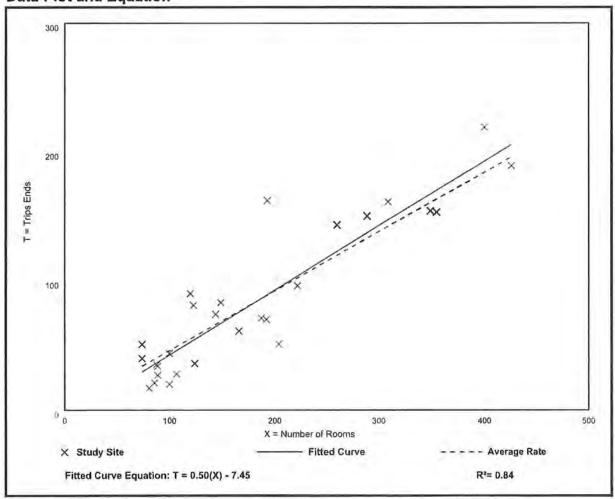



Hotel (310)

Vehicle Trip Ends vs: Rooms

On a: Weekday,

Peak Hour of Adjacent Street Traffic,

One Hour Between 4 and 6 p.m.


Setting/Location: General Urban/Suburban

Number of Studies: 31 Avg. Num. of Rooms: 186

Directional Distribution: 51% entering, 49% exiting

Vehicle Trip Generation per Room

Average Rate	Range of Rates	Standard Deviation
0.59	0.26 - 1.06	0.22

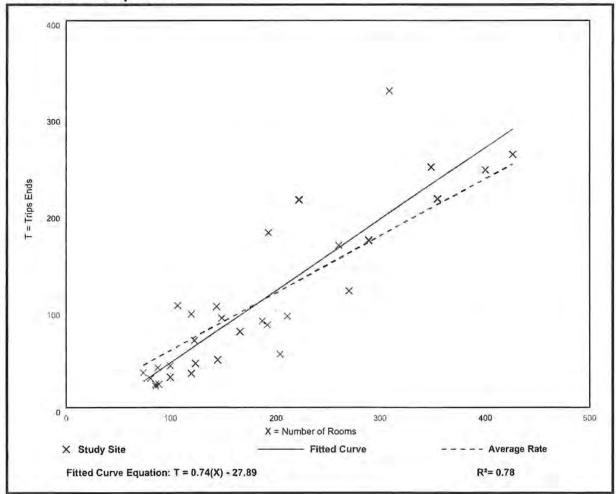



Strip Retail Plaza (<40k) (822)

Vehicle Trip Ends vs: 1000 Sq. Ft. GLA On a: Weekday


Setting/Location: General Urban/Suburban

Number of Studies: 4 Avg. 1000 Sq. Ft. GLA; 19

Directional Distribution: 50% entering, 50% exiting

Vehicle Trip Generation per 1000 Sq. Ft. GLA

Average Rate	Range of Rates	Standard Deviation
54.45	47.86 - 65.07	7.81

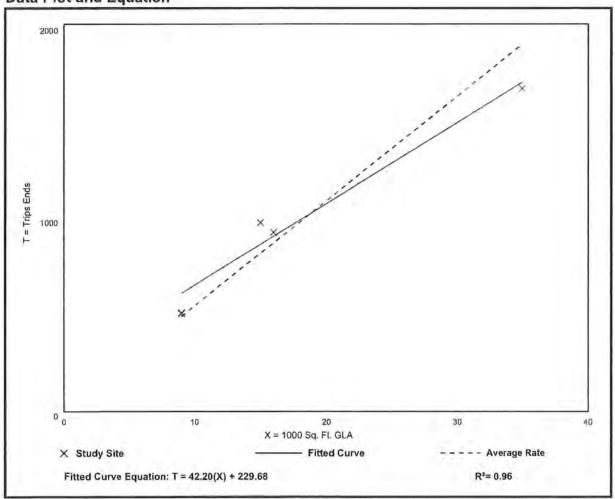



Strip Retail Plaza (<40k) (822)

Vehicle Trip Ends vs: 1000 Sq. Ft. GLA

On a: Weekday,

Peak Hour of Adjacent Street Traffic,

One Hour Between 7 and 9 a.m.


Setting/Location: General Urban/Suburban

Number of Studies: 5 Avg. 1000 Sq. Ft. GLA: 18

Directional Distribution: 60% entering, 40% exiting

Vehicle Trip Generation per 1000 Sq. Ft. GLA

Average Rate	Range of Rates	Standard Deviation
2.36	1.60 - 3.73	0.94

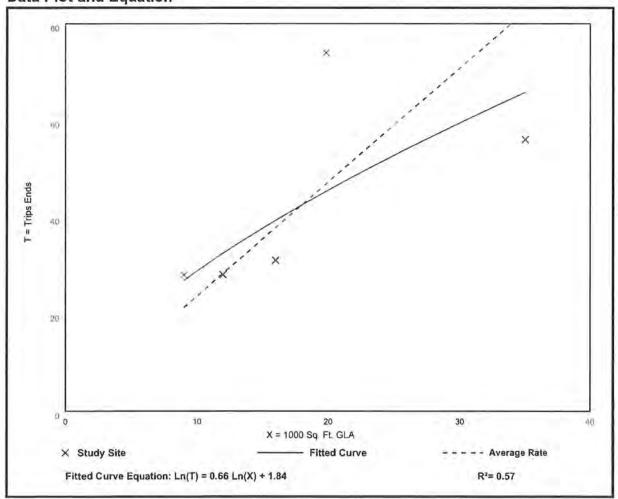

Strip Retail Plaza (<40k) (822)

Vehicle Trip Ends vs: 1000 Sq. Ft. GLA

On a: Weekday,

Peak Hour of Adjacent Street Traffic,

One Hour Between 4 and 6 p.m.

Setting/Location: General Urban/Suburban

Number of Studies: 25 Avg. 1000 Sq. Ft. GLA: 21

Directional Distribution: 50% entering, 50% exiting

Vehicle Trip Generation per 1000 Sq. Ft. GLA

Average Rate	Range of Rates	Standard Deviation
6.59	2.81 - 15.20	2.94

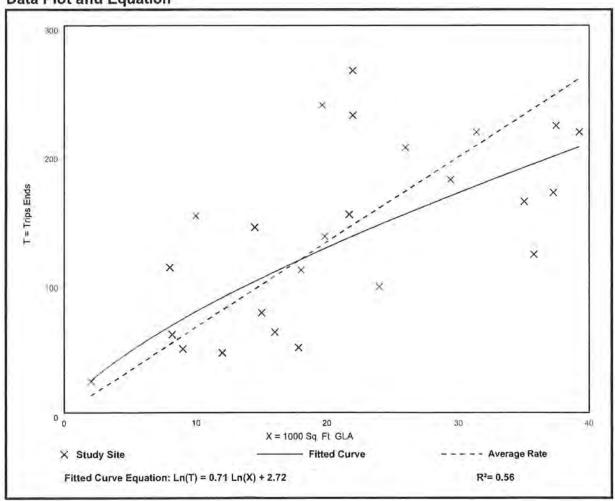






EXHIBIT T8 – HISTORIC RESOURCES IMPACT ANALYSIS



DANIELS TOWN SQUARE CPA

Historic Resources Impact Analysis

I. REQUEST

The contract purchaser for the 61.26+/- acre subject property, Bison Property Holdings, LLC ("Applicant"), is requesting a Comprehensive Plan Amendment for three changes to Lee County's Comprehensive Plan:

- Amend Map 1-A Future Land Use from General Interchange to the Intensive Development Future Land Use Category (FLUC) and
- Amend Map 1-B Mixed-use Overlay to add the property to the Mixed-use Overlay (MUO).
- A Text Amendment to Lee Plan Table 1(b) to add the residential property acreage to Intensive Development and remove acreage from General Interchange.

Additionally, there is a companion zoning action being submitted to rezone from CPD to Mixed-use Planned Development (MPD). The intent is to use the property as a commercial retail and employment center as well as multifamily residential housing.

II. HISTORIC RESOURCES IMPACT ANALYSIS

The property does not contain any historic resources (including structure, districts, and/or archaeologically sensitive areas). A letter has been secured from the Division of Historical Resources - Florida Department of State which is included in this document.



EXHIBIT T9 AND 10 – STATE AND REGIONAL POLICY ANALYSIS



DANIELS TOWN SQUARE CPA

State Policy Plan and Regional Policy Plan

I. STATE COMPREHENSIVE PLAN

Although the Community Planning Act of 2011 eliminated the requirement for consistency of the local comprehensive plan with the state comprehensive plan, the following analysis is included for further justification of the request. The plan amendment is consistent and furthers the adopted State Comprehensive Plan. Relevant portions are discussed below.

187.201(6) PUBLIC SAFETY.-

(a) Goal.—Florida shall protect the public by preventing, discouraging, and punishing criminal behavior, lowering the highway death rate, and protecting lives and property from natural and manmade disasters.

(b) Policies:

9. Increase crime prevention efforts to enhance the protection of individual personal safety and property.

<u>CONSISTENCY</u>: The Lee County Sheriff's Office has provided a letter of service availability for this site dated July 20, 2022.

(b) Policies:

- 22. Require local governments, in cooperation with regional and state agencies, to prepare advance plans for the safe evacuation of coastal residents.
- 23. Require local governments, in cooperation with regional and state agencies, to adopt plans and policies to protect public and private property and human lives from the effects of natural disasters.

CONSISTENCY: The map amendment from General Interchange to Intensive Development does not alter the density or allowance for population to occupy the parcel and need to evacuate during a natural disaster. The Lee County Emergency Management department has accounted for the population and likeliness of a natural disaster by assigning it to Evacuation Zone D. According to the LCEM plan, Zone D is one of our least vulnerable Evacuation Zones. Well prepared and protected buildings should be safe in most events. However, if evacuations are required, the safest option may be to travel to the east coast." The site will have direct access to Daniels Parkway and Three Oaks North (once completed) which connect directly to Alico Road and I-75. This is an ideal place for quick and effective evacuation and a proper place for density as it is inland out of most major dangers such as flooding or tidal surges. The site is also within 3 miles of South Fort Myers High DSchool which is a public shelter site.



187.201(7) WATER RESOURCES.—

(a) Goal.—Florida shall assure the availability of an adequate supply of water for all competing uses deemed reasonable and beneficial and shall maintain the functions of natural systems and the overall present level of surface and ground water quality. Florida shall improve and restore the quality of waters not presently meeting water quality standards.

(b) Policies:

5. Ensure that new development is compatible with existing local and regional water supplies.

CONSISTENCY: Lee County Utilities has issued a letter of utility service availability for the site.

10. Protect surface and groundwater quality and quantity in the state.

<u>CONSISTENCY</u>: The site is undergoing a planned development zoning, a custom zoning district that will be required to meet the Land Development Code regulations for Lee County, and additionally may be conditioned by the County to ensure consistency with all groundwater quality and quantity requirements. Moreover, in order for development to occur an Environmental Resource Permit will have to be attained from the State of Florida which will enforce the requirements to protect surface and ground water. The property has an active ERP in process – Application No. 220526-34567.

187.201(9) NATURAL SYSTEMS AND RECREATIONAL LANDS.—

(a) Goal.—Florida shall protect and acquire unique natural habitats and ecological systems, such as wetlands, tropical hardwood hammocks, palm hammocks, and virgin longleaf pine forests, and restore degraded natural systems to a functional condition.

(b) Policies:



- 1. Conserve forests, wetlands, fish, marine life, and wildlife to maintain their environmental, economic, aesthetic, and recreational values.
- 3. Prohibit the destruction of endangered species and protect their habitats.
- 4. Establish an integrated regulatory program to assure the survival of endangered and threatened species within the state.

<u>CONSISTENCY</u>: Lee County requires a Protected species Survey and mitigation if endangered or protected species are found. Lee County's requirements are consistent with State programs and requirements. The Southwest Florida Water Management District (SFWMD) monitors the protection of wetlands and similar environmentally sensitive site. As mentioned, the property is obtaining an ERP (Application No. 220526-34567) which will demonstrate compliance with State law.

187.201(12) HAZARDOUS AND NONHAZARDOUS MATERIALS AND WASTE.—

(a) Goal.—All solid waste, including hazardous waste, wastewater, and all hazardous materials, shall be properly managed, and the use of landfills shall be eventually eliminated.

(b) Policies:

2. By 1994, provide in all counties a countywide solid waste collection system to discourage littering and the illegal dumping of solid waste.

<u>CONSISTENCY</u>: Lee County Solid Waste has provided a letter of service availability to dispose of all solid waste on site and Lee County has an incineration plant to minimize landfill contributions.

187.201(14) PROPERTY RIGHTS.—

(a) Goal.—Florida shall protect private property rights and recognize the existence of legitimate and often competing public and private interests in land use regulations and other government action.

(b) Policies:

- 1. Provide compensation, or other appropriate relief as provided by law, to a landowner for any governmental action that is determined to be an unreasonable exercise of the state's police power so as to constitute a taking.
- 2. Determine compensation or other relief by judicial proceeding rather than by administrative proceeding.
- 3. Encourage acquisition of lands by state or local government in cases where regulation will severely limit practical use of real property.

<u>CONSISTENCY</u>: The site is under private contracts and not negatively affected by State or local policy or land use regulations that would constitute compensation.

(15) LAND USE.—

(a) Goal.—In recognition of the importance of preserving the natural resources and enhancing the quality of life of the state, development shall be directed to those areas which have in place, or have agreements to provide, the land and water resources, fiscal abilities, and service capacity to accommodate growth in an environmentally acceptable manner.

(b) Policies:

1. Promote state programs, investments, and development and redevelopment activities which encourage efficient development and occur in areas which will have the capacity to service new population and commerce.



 Develop a system of incentives and disincentives which encourages a separation of urban and rural land uses while protecting water supplies, resource development, and fish and wildlife habitats.

<u>CONSISTENCY</u>: The development area is an urban environment with current intense allowances for development that are appropriate as the site is serviced by or has commitments from all applicable urban services agencies such as EMS, Police, Fire, Transit, Utilities, Schools, Solid Waste and Parks. Additionally, the site will have access to major roadways with adequate carrying capacity when the current plans for Three Oaks North, Daniels Parkway Expansion and the I-75 interchange improvements are made – all slated and funded for construction.

(17) PUBLIC FACILITIES.—

(a) Goal.—Florida shall protect the substantial investments in public facilities that already exist and shall plan for and finance new facilities to serve residents in a timely, orderly, and efficient manner.

(b) Policies:

- Provide incentives for developing land in a way that maximizes the uses of existing public facilities.
- 2. Promote rehabilitation and reuse of existing facilities, structures, and buildings as an alternative to new construction.
- 3. Allocate the costs of new public facilities on the basis of the benefits received by existing and future residents.

<u>CONSISTENCY</u>: The site is considered an urban site that has been identified as a proper place for intense development by the Lee Plan having been placed in the General Interchange future land use category. The change to Intensive Development and the Mixed-use Overlay is a reflection of the proper placement of population and commercial employment centers that are serviced by all means if urban services.

