

ADMINISTRATIVE AMENDMENT (PD) ADD2023-00145

ADMINISTRATIVE AMENDMENT
LEE COUNTY, FLORIDA

WHEREAS, Miromar Lakes, LLC filed an application for Final Plan Approval in a Mixed Use Planned Development (MPD) with utilization of two previously approved deviations and five additional requested deviations on a project known as Prestino at Miromar Lakes to permit a 23-lot residential subdivision on +/- 21.9 acres of land located at Miromar Lakes, Fort Myers, FL; and

WHEREAS that the subject property is generally located at the southeast corner of the intersection of Treeline Avenue/Ben Hill Griffin Parkway and Alico Road, described more particularly as:

LEGAL DESCRIPTION: In Section 11, Township 46 South, Range 25 East, Lee County, Florida:

ATTACHED AS EXHIBIT "A"

WHEREAS, the subject property is located in the University Community Future Land Use Category as designated by the Lee Plan; and

WHEREAS, the property was originally rezoned to Mixed Use Planned Development (MPD) in Resolution number Z-99-029 (with subsequent amendments in Resolution numbers Z-02-072, Z-06-064, Z-10-019, Z-12-004, Z-13-020 and Z-23-018); and

WHEREAS, the Lee County Land Development Code provides for certain administrative changes to planned development master concept plans and planned unit development final development plans; and

WHEREAS, Condition 1.c. of Resolution Z-13-020 requires, as a prerequisite to approval of any local Development Order, an approved Final Zoning Plan (FPA) that specifies the type, intensity and configuration of development for the particular site prior to vertical (structural) development (see Exhibit "D"); and

WHEREAS, the Miromar Lakes Mixed Use Planned Development (MPD)/Development of Regional Impact (DRI) is a +/- 1,800-acre mixed use project approved for 125,000 square feet of retail uses, 25,000 square feet of office uses, 150 hotel rooms, 3,066 residential units, and recreational facilities and preserve areas (see Exhibit "E"); and

WHEREAS, the applicant has requested the following deviations to facilitate the proposed development (see Exhibit "C"):

Deviation 5 of Resolution Z-13-020, which approved relief from the LDC 10-291(3) requirement that a residential development of more than five acres and commercial or industrial development of more than ten acres must provide more

than one means of ingress or egress for the development to allow only one means of access. Fire Department approval for Prestino has been obtained.

Deviation 7 of Resolution Z-13-020, which approved relief from the LDC Section 10-296 ("Street Design and Construction Standard") requirement to provide that wearing surfaces for local and access roads for Class A development must be 1.5 inches asphaltic concrete of Florida Department of Transportation Type S-1, to allow for cement concrete or decorative pavers within private local roadways with Miromar Lakes.

Deviation 1: A request for relief from the LDC Section 10-418(3) which states that bulkheads, geo-textile tubes, riprap revetments or other similar hardened shoreline structures may comprise up to 20 percent of an individual lake shoreline; to allow 65 percent of the intended shoreline for recreational purposes.

Deviation 2: A request for relief from the LDC Section 10-418 requirement that states the use of rip-rap adjacent to single family homes is prohibited, to allow for rip-rap placement adjacent to single family homes.

Deviation 3: A request for relief from the LDC Section 10-328(a) requirement which mandates that no portion of the required lake maintenance easement may be located within the limits of a platted single-family residential lot to allow lake maintenance easements with the limits of the platted-single family lots with the subject tract.

Deviation 4: A request for relief from the LDC Section 10-384(c)4 requirement that the maximum allowed dead-end water line must be no longer than 1,000 feet; to allow the proposed dead-end water line to exceed 1,000 feet.

Deviation 5: A request for relief from LDC Section 10-256(2)(c) which requires a pedestrian way along one side of all streets internal to a residential development to all no sidewalk.

WHEREAS, Deviations 1, 2, 3, and 5 were previously approved by ADD2020-00138, which abuts the subject property to the south, and deviation 4 was previously approved for the subject property by ADD2020-00071, which this amendment proposes to supersede; and

WHEREAS, the objective of a Final Zoning Plan is to ensure compliance with the DRI Development Order, Zoning Resolution, and LDC and to allow detailed review of deviations while allowing development flexibility to respond to changing conditions; and

WHEREAS, the subject application and plans have been reviewed by the Lee County Department of Community Development in accordance with applicable regulations for compliance with all terms of the administrative approval procedures; and

WHEREAS, the subject application and plans have been reviewed for compliance with the MCP and all of the conditions approved by Resolution Z-13-020, as subsequently amended; and

WHEREAS, staff from the Development Services and Zoning Sections reviewed the deviation requests and offered no objection; and

WHEREAS, it is found that the proposed amendment does not increase density or intensity within the development; does not decrease buffers or open space required by the LDC; does not underutilize public resources or infrastructure; does not reduce total open space, buffering, landscaping or preservation areas; and does not otherwise adversely impact on surrounding land uses.

NOW, THEREFORE, IT IS HEREBY DETERMINED that the application for for Final Plan Approval in a Mixed Use Planned Development (MPD) with utilization of two previously approved deviations and five additional deviations on a project known as Prestino at Miromar Lakes to permit a 23-lot residential subdivision on +/- 21.9 acres of land is **APPROVED**, **subject to the following conditions:**

1. **The Development must be in substantial compliance with the Final Zoning Plan entitled “Prestino at Miromar Lakes” dated August 2023, attached hereto as Exhibit “B”.**
2. **Any development which is not consistent with the final site plan approved herein and attached hereto, will require an additional, amended final plan approval.**
3. **Deviations as proposed are approved per the conditions of this amendment only.**
4. **As required under Condition 3 of ADD2020-00138 and Deviation 5 of Z-13-020, prior to Development Order approval the applicant must obtain an approval in writing from Lee County Department of Public Safety for the ingress and egress to the parcel.**
5. **Prior to Development Order approval the applicant must provide hydraulic calculations signed and sealed by a professional engineer, verifying that the proposed water main design is sufficient to provide the required fire flow in accordance with the requirements of the National Fire Protection Association.**
6. **The terms and conditions of the original zoning resolutions and subsequent amendments thereto remain in full force and effect, except as amended herein.**
7. **If it is determined that inaccurate or misleading information was provided to the County or if this decision does not comply with the LDC when rendered, then, at any time, the Zoning Manager may issue a modified decision that complies with the Code or revoke the decision. If the approval is revoked, the**

applicant may acquire the necessary approvals by filing an application for public hearing in accordance with Chapter 34.

Duly passed, adopted, and electronically signed on 10/18/2023

Anthony R. Rodriguez, AICP, CPM, Zoning Manager

List of Exhibits

Exhibit A: Legal Description

Exhibit B: Site Plan (Final Plan Approval)

Exhibit C: Schedule of Deviations and Justifications

Exhibit D: Resolution Z-13-020

Exhibit E: Resolution Z-23-018

Exhibit F: Fire District Approval Letter



Prestino at Miromar Lakes - Legal Description

Tract FD-3, Miromar Lakes-Unit XVIII-Costa Maggiore-Phase 2, a subdivision according to the plat thereof recorded under Official Records Instrument No. 2020000096915, in the Public Records of Lee County, Florida.

STRAP NO. 11-46-25-L1-20FD3.0000

REVIEWED
ADD2023-00145
Rick Burris, Principal
Planner
Lee County DCD/Planning
9/19/2023

Exhibit B

FINAL PLAN APPROVAL
FOR

PRESTINO AT MIROMAR LAKES

PART OF SECTION 11, TOWNSHIP 46, RANGE 25E,
LEE COUNTY, FLORIDAPREPARED FOR/OWNED BY:
MIROMAR DEVELOPMENT CORPORATION
10801 CORKSCREW ROAD, SUITE 305
ESTERO, FL 33928
(239) 390-5100


OPEN SPACE

OPEN SPACE	AREA (ACRES)
GOLF COURSE	218.96
PHASE I	61.72
PHASE II	13.10
GOLF MAINTENANCE	0.92
VALENCIA	8.08
TRACT M & N	4.77
BEACH CLUB	2.34
TIVOLI	0.00
BELLAVISTA	3.55
MEDITERRANEAN VILLAGE	6.71
CAPRINI GREENS	1.19
VAVALDI	0.00
GOLF CLUBHOUSE	2.51
SAND MARINO	13.40
MIRASOL ACCESS DRIVE	1.31
TRACT C1/C2 ENTRANCE	0.39
PORTO ROMANO	2.90
MIRASOL RESIDENTIAL	0.00
CASTELLI & ANACAPRI	0.92
VOLTERRA & BELLINI	5.89
RAVENNA	3.17
BEACH CLUB PH. 2	2.73
MIROMAR LAKES PKWT. EXTENSION	0.00
EAST 100 AC.	0.00
BEACH COTTAGES	3.31
PENINSULA PHASE III	6.16
PENINSULA PHASE IV	16.33
UNIVERSITY VILLAGE PH I	24.74
LAKE SHORE STABILIZATION	0.00
TRACT M-M	1.90
POSITANO	0.00
TEMPORARY BOAT STORAGE FACILITY	0.92
RESORT VILLAGE PHASE I	2.26
SARDINIA	1.27
RESORT VILLAGE PHASE 2	7.02
POSITANO	0.98
RESORT VILLAGE PHASE 2D	1.71
PRESTINO	5.80
BOAT RAMP	0.39
AVELLINO	0.67
TOTAL	429.02 AC.

OPEN SPACE FOR ALL DEVELOPMENTS EXCEPT PRESTINO OBTAINED FROM ADD2020-00138

LEE COUNTY NUMBER	APPROVAL HISTORY TRACT	DATE	TYPE	QUANTITY
Z-99-029	MIROMAR LAKES	9/29/1999	RESOLUTION	N/A
ADD2000-00110	PHASE 1	7/27/2000	SINGLE FAMILY	11 UNITS
ADD2000-00111	PHASE 1	7/27/2000	SINGLE FAMILY	30 UNITS
ADD2000-00117	PHASE 2	7/31/2000	SINGLE FAMILY	51 UNITS
ADD2000-00161	GOLF MAINT.	12/19/2000	COMMERCIAL	7500 S.F.
ADD2000-00191	TEMP CLUBHOUSE	1/6/2001	COMMERCIAL	6,500 S.F.
ADD2001-00018	VALENCIA	5/24/2001	MULTI-FAMILY	80 UNITS
ADD2001-00085	TRACT M & N	9/17/2001	SINGLE FAMILY	27 UNITS
ADD2001-00113A	BEACH CLUB	4/1/2002	RECREATION	4.77 ACRES
ADD2001-00125	TIVOLI	10/16/2001	SINGLE FAMILY	113 UNITS
ADD2001-00142	SALES CENTER	12/20/2001	COMMERCIAL	4,147 S.F.
ADD2002-00045	BELLAVISTA	6/28/2002	MULTI-FAMILY	60 UNITS
ADD2002-00077	MED. VILLAGE	8/5/2002	SINGLE FAMILY	33 UNITS
ADD2002-00168	CAPRINI GREENS	12/17/2002	SINGLE FAMILY	27 UNITS
ADD2003-00028	VAVALDI	4/4/2003	MULTI-FAMILY	60 UNITS
ADD2003-00047	GOLF CLUBHOUSE	5/14/2003	RECREATION	5.45 ACRES
Z-02-072	MIROMAR LAKES	12/15/2003	RESOLUTION	N/A
ADD2003-00151	CAPRINI GREENS MOD	12/18/2003	ADMEND. TO ADD2002-00168	
ADD2004-00033	SAN MARINO	7/21/2004	MULTI-FAMILY	160 UNITS
ADD2004-00042	MIRASOL ACCESS	4/2/2004	ACCESS	5.07 ACRES
ADD2004-00045	C1/C2 ACCESS	4/2/2004	ACCESS	1.02 ACRES
ADD2004-00054	PORTO ROMANO	5/11/2004	SINGLE FAMILY	55 UNITS
ADD2004-00070	MIRASOL RESIDENTIAL	7/27/2004	MULTI-FAMILY	110 UNITS*
ADD2004-00074	CAPRINI GREENS MOD	4/21/2004	ADMEND. TO ADD2002-00168	
ADD2004-00176	MIRASOL ACCESS MOD	11/17/2004	ADMEND. TO ADD2004-00042	
ADD2004-00177	CASTELLI & ANACAPRI	12/3/2004	SINGLE FAMILY	18 UNITS
ADD2004-00223	MONTABELLO	01/10/2005	MULTI-FAMILY	40 UNITS
ADD2004-00253	VOLTERRA & BELLINI	4/25/2005	SINGLE FAMILY/ MULTI-FAMILY	12/60 UNITS
ADD2005-00134	MIRASOL PHASE 2	8/2/2005	MULTI-FAMILY	120 UNITS**
ADD2005-00190	RAVENNA	3/31/2006	MULTI-FAMILY	60 UNITS
ADD2006-00004	BEACH CLUB PH. 2	3/13/2006	RECREATION	7.67 ACRES
ADD2006-00002	MIROMAR LAKES PKWT. EXTENSION	3/13/2006	ACCESS	133.08 ACRES
ADD2006-00009	EAST 100 AC.	4/10/2006	SINGLE FAMILY	50 UNITS*
Z-06-064	MIROMAR LAKES	10/16/2006	RESOLUTION	N/A
ADD2008-00130	BEACH COTTAGES	12/5/2008	SINGLE FAMILY	15 UNITS*
ADD2008-00144	SORRENTO LME MOD.	4/1/2009	ADMEND. TO ADD2006-00009	
ADD2009-00026	COSA AMALFI MOD.	4/16/2009	ADMEND. TO ADD2008-00130	
ADD2009-00026	COSA AMALFI MOD	3/8/2010	ADMEND. TO ADD2009-00026	
Z-10-019	MIROMAR LAKES	10/16/2006	RESOLUTION	N/A
Z-12-004	MIROMAR LAKES	10/16/2006	RESOLUTION	N/A
ADD2012-00110	PENINSULA PHASE III	5/16/2012	SINGLE FAMILY	28 UNITS
ADD2014-00102	PENINSULA PHASE IV	8/15/2014	SINGLE FAMILY	56 UNITS
ADD2014-00175	COSTA AMALFI MOD.	10/27/2014	ADMEND. TO ADD2008-00130	
ADD2014-00213	UNIVERSITY VILLAGE PH I	PENDING	MIXED USE	168 M.F. UNITS 75,000 S.F.
ADD2015-00070	LAKE SHORELINE STABILIZATION	10/6/2015	RECREATIONAL	RIP RAP TO 60% 12 UNITS
ADD2015-00079	TRACT M-M	07/14/2015	SINGLE FAMILY	12 UNITS
ADD2015-00209	POSITANO	01/12/2016	MULTI-FAMILY	40 UNITS**
ADD2016-00025	TEMP BOAT STORAGE	07/07/16	RECREATION	N/A
ADD2016-00148	RESORT VILLAGE PH I	11/29/16	SINGLE FAMILY	24 UNITS
ADD2016-00206	SARDINIA	01/06/17	SINGLE FAMILY	8 UNITS
ADD2017-00013	RESORT VILLAGE PH II	07/30/19	SINGLE FAMILY	29 UNITS
ADD2017-00036	UNIVERSITY VILLAGE PH II	03/07/17	MULTI-FAMILY	96 UNITS
ADD2019-00163	POSITANO	11/21/2019	SINGLE FAMILY	18 UNITS
ADD2019-00178	RESORT VILLAGE PH II D	01/17/2020	ADMEND. TO ADD2017-00013	
ADD2020-00071	CAPRI	07/29/2020	RECREATION	110 UNITS**
ADD2020-00072	BOAT RAMP	08/21/2020	RECREATION	N/A
ADD2020-00138	AVELLINO	12/17/2020	SINGLE FAMILY	22 UNITS
ADD2023-00138	PRESTINO	PENDING	SINGLE FAMILY	23 UNITS

NOTES:

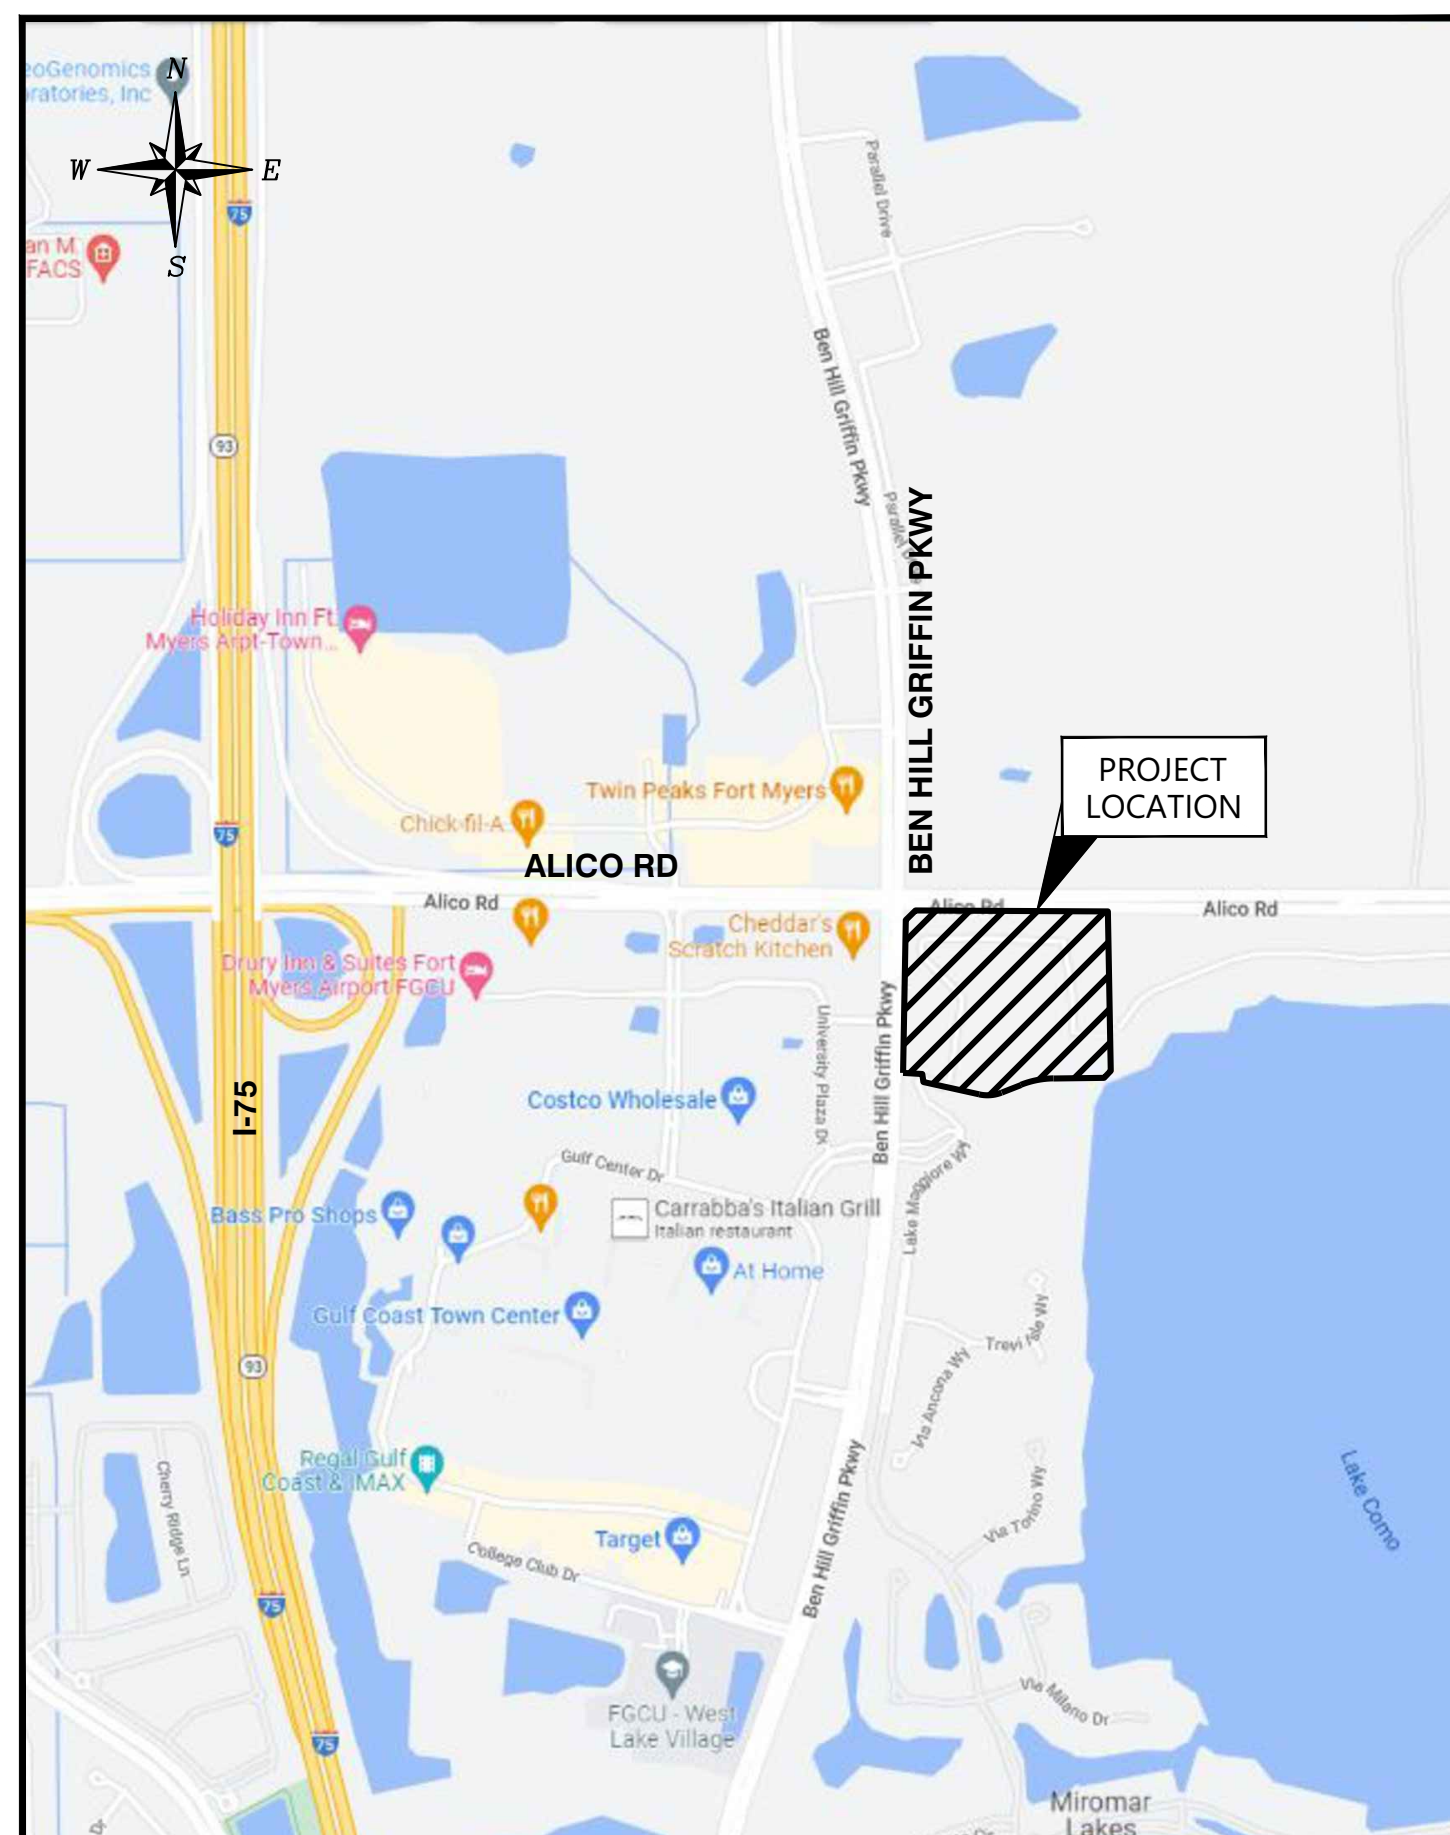* DENOTES PROJECTS CONSTRUCTED FEWER
UNITS THAN APPROVED. NUMBER
REPRESENTS CONSTRUCTED NUMBER OF
UNITS** DENOTES ADD APPROVAL THAT IS VOIDED
BY LATER APPROVALAPPROVAL HISTORY OBTAINED FROM
ADD2020-00138

PROJECT LOCATION

N.T.S.

BOAT DOCK HISTORY

SINGLE FAMILY SUBDIVISIONS

	BOAT DOCKS APPROVED	BOAT DOCKS PROPOSED
VERONA LAGO	55	0
CAPRINI GREENS/BELLAMARE	18	0
ISOLA BELLA	13	0
CASTELLI & ANACAPRI	17	0
VOLTERRA	12	0
COSTA AMALFI (BEACH COTTAGES) SORRENTO	9	0
(EAST 100 AC.)	11	0
PORTOFINO (EAST 100 AC.)	20	0
MURANO (EAST 100 AC.)	19	0
NAVONA (PENINSULA PH III) SALERNO	18	0
(PENINSULA PH III) SALERNO (PENINSULA PH IV)	10	0
ESTATE LOTS (PENINSULA PH IV)	22	0
VILLA LOTS (PENINSULA PH IV)	0	0
TRACT M-M	0	0
POSITANO	0	0
RESORT VILLAGE -PHASE 1	16	0
SARDINIA	8	0
RESORT VILLAGE -PHASE 2	18	0
AVELLINO	22	0
PRESTINO	0	23
TOTAL	288	23

ANCILLARY (250 MAXIMUM)

	BOAT SLIPS APPROVED	BOAT SLIPS PROPOSED
BEACH CLUB PH I	13	0
BEACH CLUB PH II	13	0
BEACH CLUB PH III	13	0
VIVALDI	18	0
MIRASOL BEACH PH 1&2	18	0
BELLINI	18	0
RAVENNA	60	0
THE PENINSULA PH IV POSITANO	16	0
POSITANO	18	0
TOTAL	187	0

TOTAL PROPOSED & APPROVED ANCILLARY SLIPS

187

TOTAL REMAINING ANCILLARY SLIPS

63


EACH SINGLE-FAMILY LAKEFRONT LOT IS ALLOWED TO HAVE ONE DOCK. SINGLE-FAMILY LAKEFRONT LOT DOCKS MAY BE CONVERTED TO MULTIPLE-FAMILY SLIPS FOR WET BOAT STORAGE ON A ONE FOR ONE (1:1) BASIS.

AN ADDITIONAL 250 (MAXIMUM) ANCILLARY SLIPS FOR WET BOAT STORAGE ARE ALLOWED ON THE LAKE.

RWA ENGINEERING	6610 Willow Park Drive Suite 200 Naples, FL 34109	ENGINEER'S SEAL:
	12800 University Drive Suite 175 Fort Myers, FL 33907	
	19503 S West Villages Pkwy Unit A5 Venice, FL 34293	
	Office: (239) 597-0575 Fax: (239) 597-0578 www.consult-rwa.com	
	Florida Certificates of Authorization EB 7663 LB 6952	
DATE: AUGUST, 2023	PROJECT No.: 180114.00.01	SHEET No.: 01 OF 4



LEGEND	
PROPOSED	DESCRIPTION
	PROPOSED AND EXISTING SHORELINE
	EXISTING APPROVED RIP-RAP LOCATION
	PHASE 1 - APPROVAL OF EXISTING UNDOCUMENTED RIP-RAP LOCATIONS
	PHASE 2 - RIP-RAP LOCATION
	PHASE 3 - RIP-RAP LOCATION
	PHASE 4 - RIP-RAP LOCATION
	PHASE 4 - RIP-RAP RELOCATION AREA
	PHASE 5 - RIP-RAP LOCATION
	PHASE 6 - RIP-RAP LOCATION
	PHASE 7 - RIP-RAP LOCATION RESORT VILLAGE PHASE 1 - PROPOSED RIP-RAP
	PHASE 8 - RIP-RAP LOCATION - RESORT VILLAGE PHASE 2 - PROPOSED RIP-RAP
	PHASE 9 - RIP-RAP LOCATION PRESTINO AT MIROMAR LAKES - PROPOSED RIP-RAP



PROPOSED LAKE 5 & 6 SHORELINE:

TOTAL SHORELINE 69,955 L.F.

PROPOSED RIP RAP	
APPROVED	11,130 L.F.
PHASE 1	10,750 L.F.
PHASE 2	1,140 L.F.
PHASE 3	2,910 L.F.
PHASE 4	5,795 L.F.
PHASE 5	2,100 L.F.
PHASE 6	600 L.F.
PHASE 7 RESORT VILLAGE PH1	900 L.F.
PHASE 8 RESORT VILLAGE PH2	900 L.F.
PHASE 9 PRESTINO AT MIROMAR LAKES	1,562 L.F.
PHASE 10 BOAT RAMP	300 L.F.
PHASE 11 AVELLINO	1,560 L.F.
TOTAL	39,647 L.F.

PERCENTAGE TO COVER PROPOSED SHORELINE TREATMENT
• 39,647 L.F. / 69,955 L.F. *100 = 56.7

MAXIMUM HARDENED SHORELINE TREATMENT (65%)
• 69,955 L.F. * 65.0% = 45,471 L.F.

AVAILABLE SHORELINE TREATMENT FOR STABILIZATION
• 45,471 L.F. - 39,647 L.F. = 5,824 L.F.


GENERAL NOTES

- IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD LOCATE AND VERIFY ANY EXISTING UTILITIES.
- EXTREME CAUTION IS TO BE USED WHEN EXCAVATING, AS THE NUMBER AND LOCATION OF EXISTING UTILITIES HAVE BEEN NOTED BASED ON THE BEST INFORMATION AVAILABLE.
- THE CONTRACTOR SHALL SAFEGUARD AND AVOID PENETRATION OF SPECIAL WETLAND PRESERVATION AREAS SHOWN ON THE DRAWINGS AND FENCED AT THE SITE.
- IT IS THE CONTRACTOR'S RESPONSIBILITY TO REPLACE ANY EXISTING LANDSCAPING (i.e. SOD, BUSHES, TREES, ETC.), SPRINKLER PIPE, SPRINKLER HEADS AND FENCING THAT MAY HAVE TO BE REMOVED DURING CONSTRUCTION.
- ANY DAMAGE TO EXISTING UTILITIES AND PROPERTY DURING CONSTRUCTION SHALL BE REPAIRED AND/OR REPLACED AT THE CONTRACTOR'S EXPENSE.


GENERAL DEVELOPMENT NOTE:

1) BASED ON THE SFWMD GENERAL PERMIT #36-03568-P AND THE U.S.D.A. SOIL CONSERVATION SERVICE SOIL SURVEY OF LEE COUNTY, FLORIDA. IT IS ANTICIPATED THAT THIS SITE MAY BE USED SAFELY FOR BUILDING PURPOSES, WITHOUT UNDUE DANGER FROM FLOOD OR ADVERSE SOIL OR FOUNDATION CONDITIONS. SUBJECT TO PROPERLY ENGINEERED AND CONSTRUCTED CORRECTIVE MEASURES, INCLUDING BUT NOT LIMITED TO SITE FILL, DRAINAGE WATER MANAGEMENT AND SEWAGE DISPOSAL FACILITIES.

ALL RIP-RAP AREAS EXCEPT PHASE 9 (PRESTINO)
OBTAINED FROM ADD2020-00138

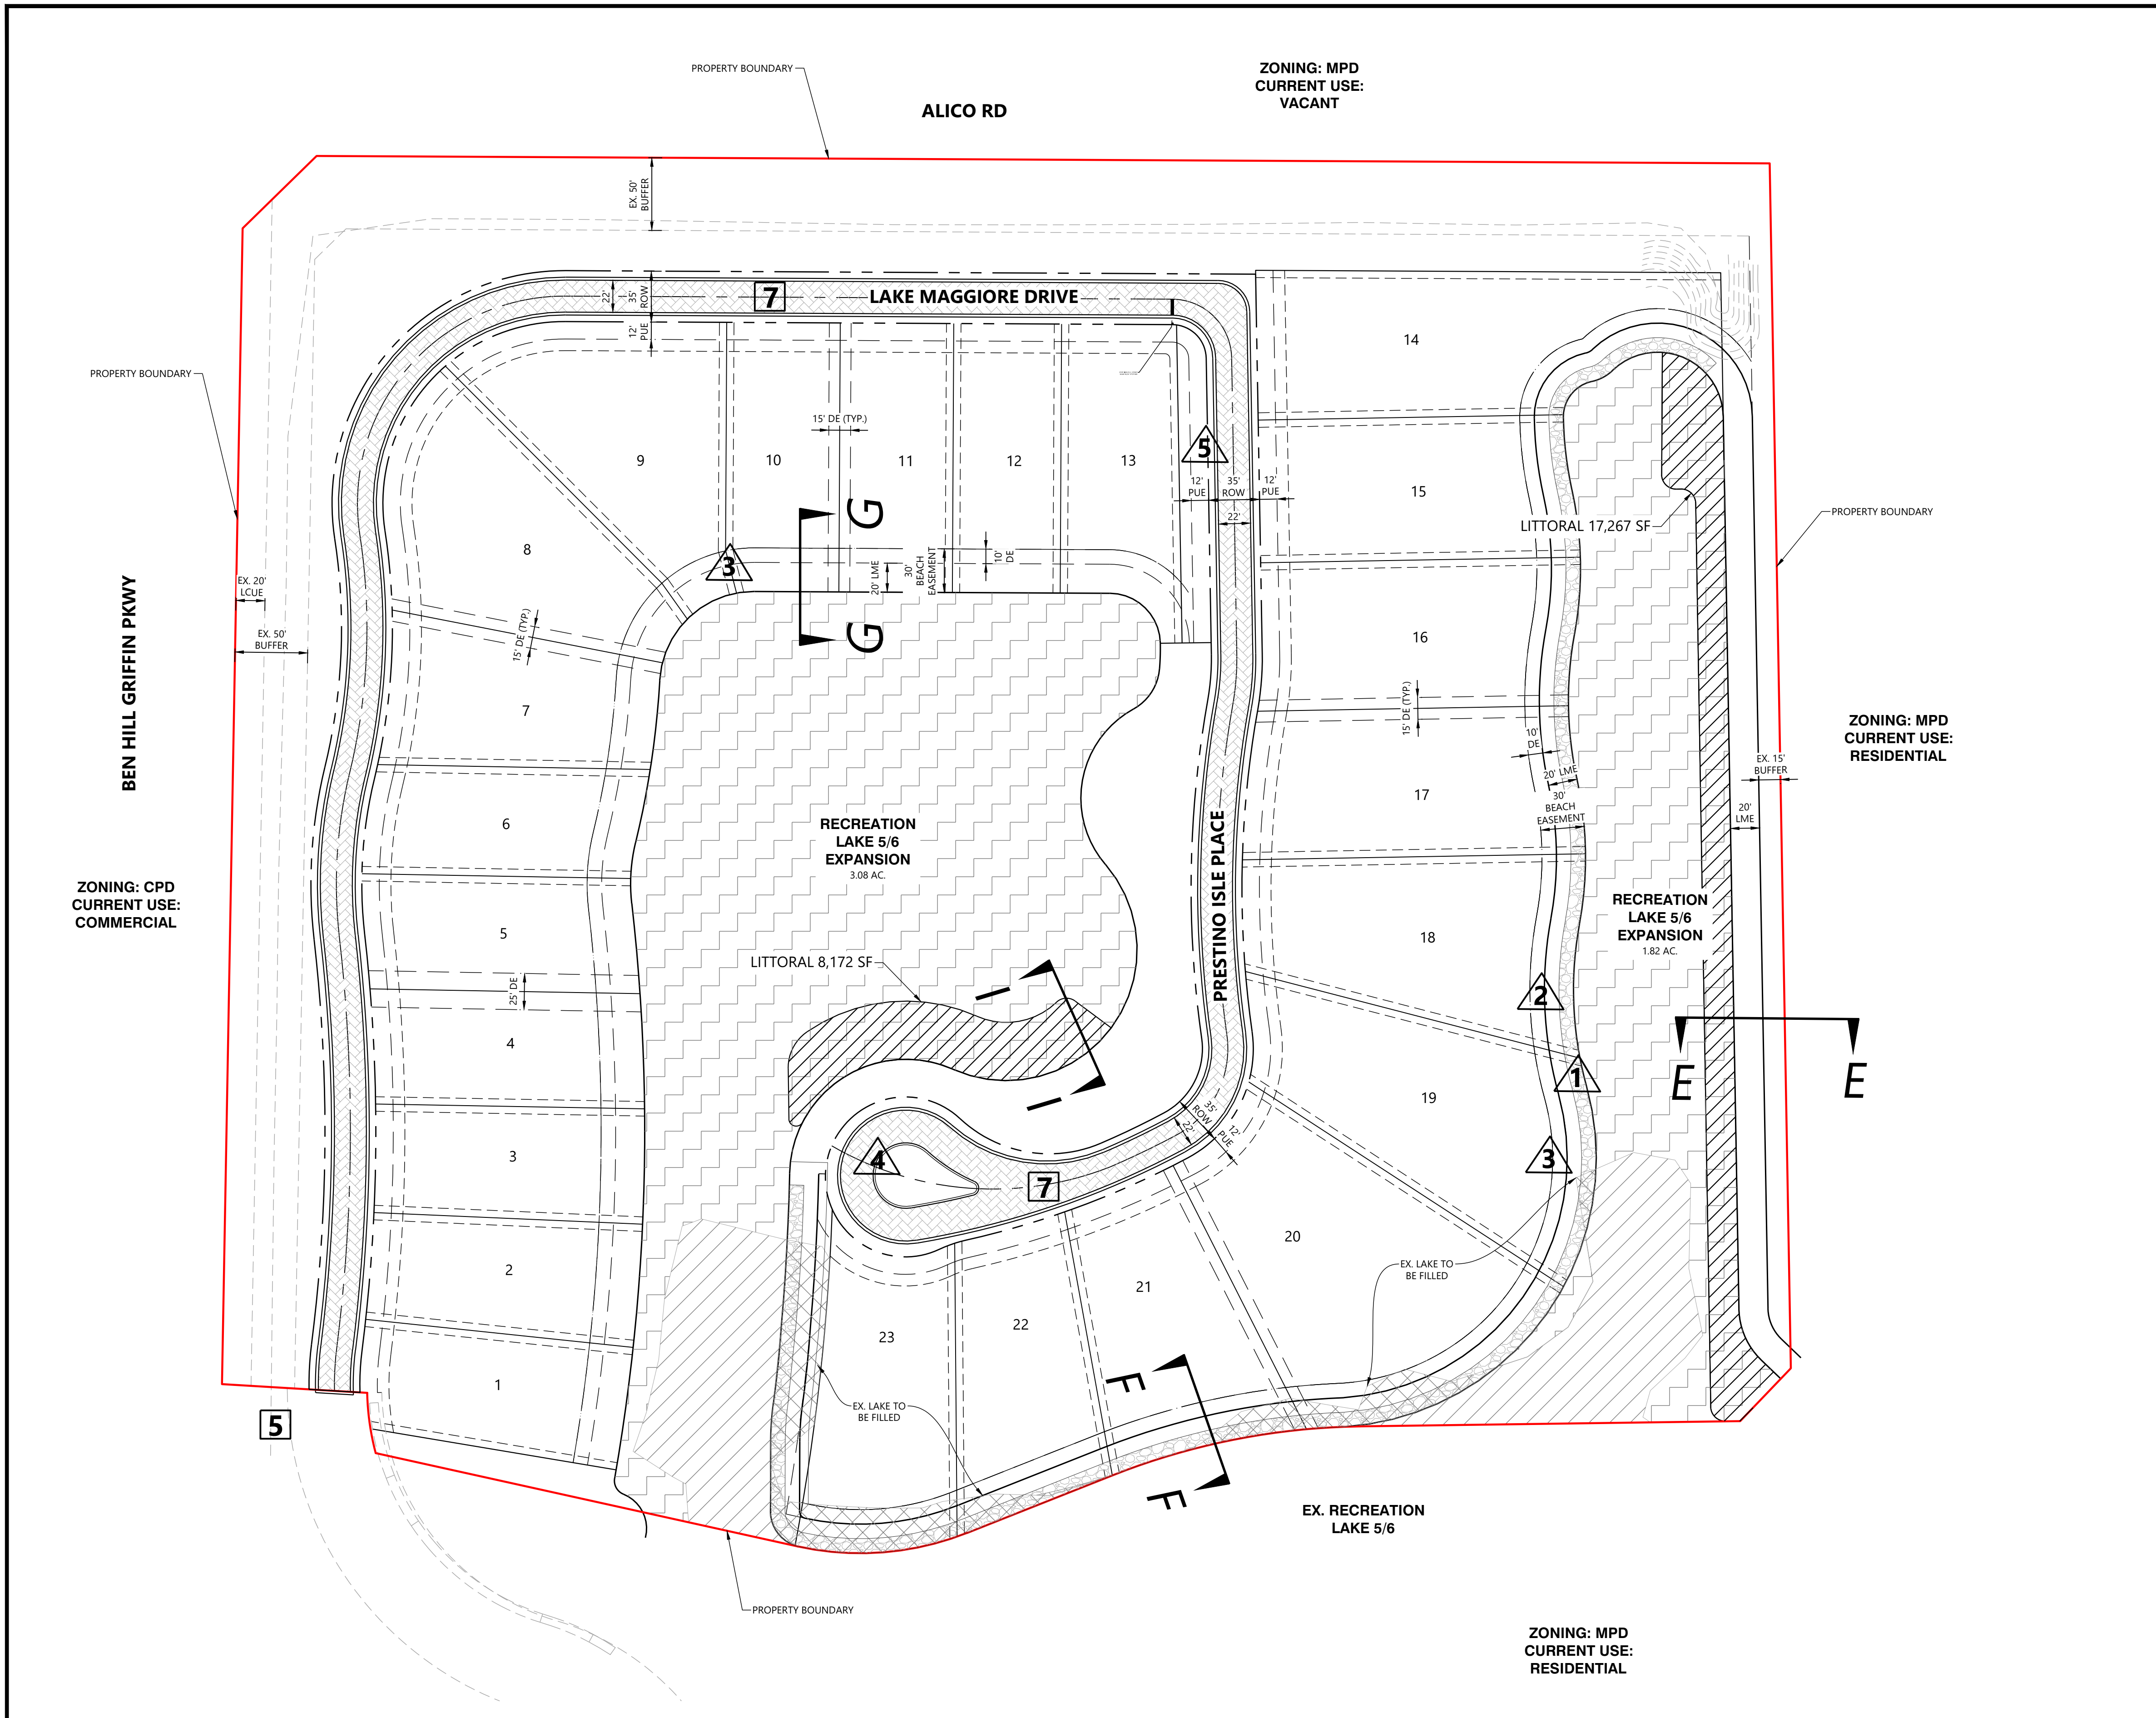

LEGEND	
PROPOSED	DESCRIPTION
	EXISTING LAKE AREA
	EXISTING LAKE AREA TO BE FILLED
	PROPOSED LAKE AREA
	LITTORAL AREA
	PAVER BRICK
	RIP-RAP LAKE SHORELINE
	DEVIATION PER Z-13-20
	PROPOSED DEVIATION

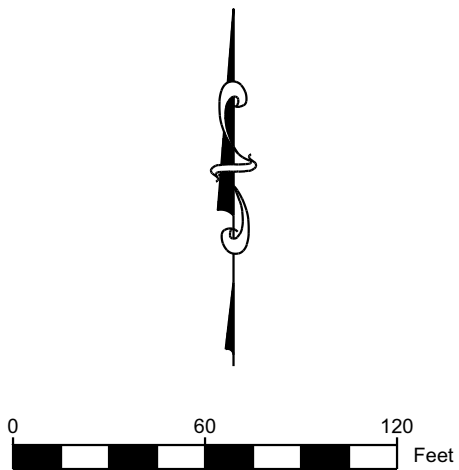

SETBACK STANDARDS TABLE RESOLUTION #Z-13-020	
SINGLE FAMILY DETACHED VILLAS	MIN. REQUIRED
MIN. LOT AREA (S.F.)	6,500 S.F.
MIN. LOT WIDTH	50
MIN. LOT DEPTH	70
MIN. STREET SETBACK ¹	20
MIN. SIDE SETBACK	5.0
MIN. REAR SETBACK ²	10
MIN. ACCESSORY STR. ³ SIDE SETBACK	5.0
MIN. ACCESSORY STR. ³ REAR SETBACK	10
BUILDING SEPARATION	10
MAX. BUILDING HEIGHT ⁴	45' / 3 STORIES
MAX. LOT COVERAGE (%)	55%

LAND USE SUMMARY		
LAND USE	ACREAGE	PERCENT
LOT AREA	10.70	49%
LAKE AREA	4.82	22%
RIGHT OF WAY	1.80	8%
PERVIOUS AREA	0.49	2%
IMPERVIOUS AREA	1.31	6%
OPEN SPACE AREA	4.60	21%
TOTAL AREA	21.92	100%

PROVIDED OPEN SPACE:
4.60 AC. (OPEN SPACE TRACTS) + 1.20 (25% LAKE AREA) = 5.80 AC

23 BOAT DOCKS PROPOSED (1 PER SINGLE-FAMILY LOT).






DEVIATIONS PER Z-13-020:
DEVIATION ONE MEANS OF ACCESS
DEVIATION BRICK PAVERS TO REPLACE 1 1/2" S-1 ON PRIVATE ROADS
PROPOSED DEVIATIONS:
DEVIATION 65% HARDENED SHORELINE STRUCTURES FOR RECREATIONAL LAKE
DEVIATION RIP-RAP ALONG SINGLE-FAMILY LOTS
DEVIATION LAKE MAINTENANCE EASEMENTS WITHIN THE LIMITS OF SINGLE-FAMILY PLATTED LOTS
DEVIATION DEAD-END WATER MAIN EXCEEDING 1,000 FEET
DEVIATION NO SIDEWALK

ALL EXISTING AND PROPOSED GRADE ELEVATIONS ARE N.A.V.D. 1988

LITTORAL PLANTING CALCULATION:
PER SECTION 10-418 OF THE LEE COUNTY LDC

ALL STREETS TO BE PRIVATELY MAINTAINED

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

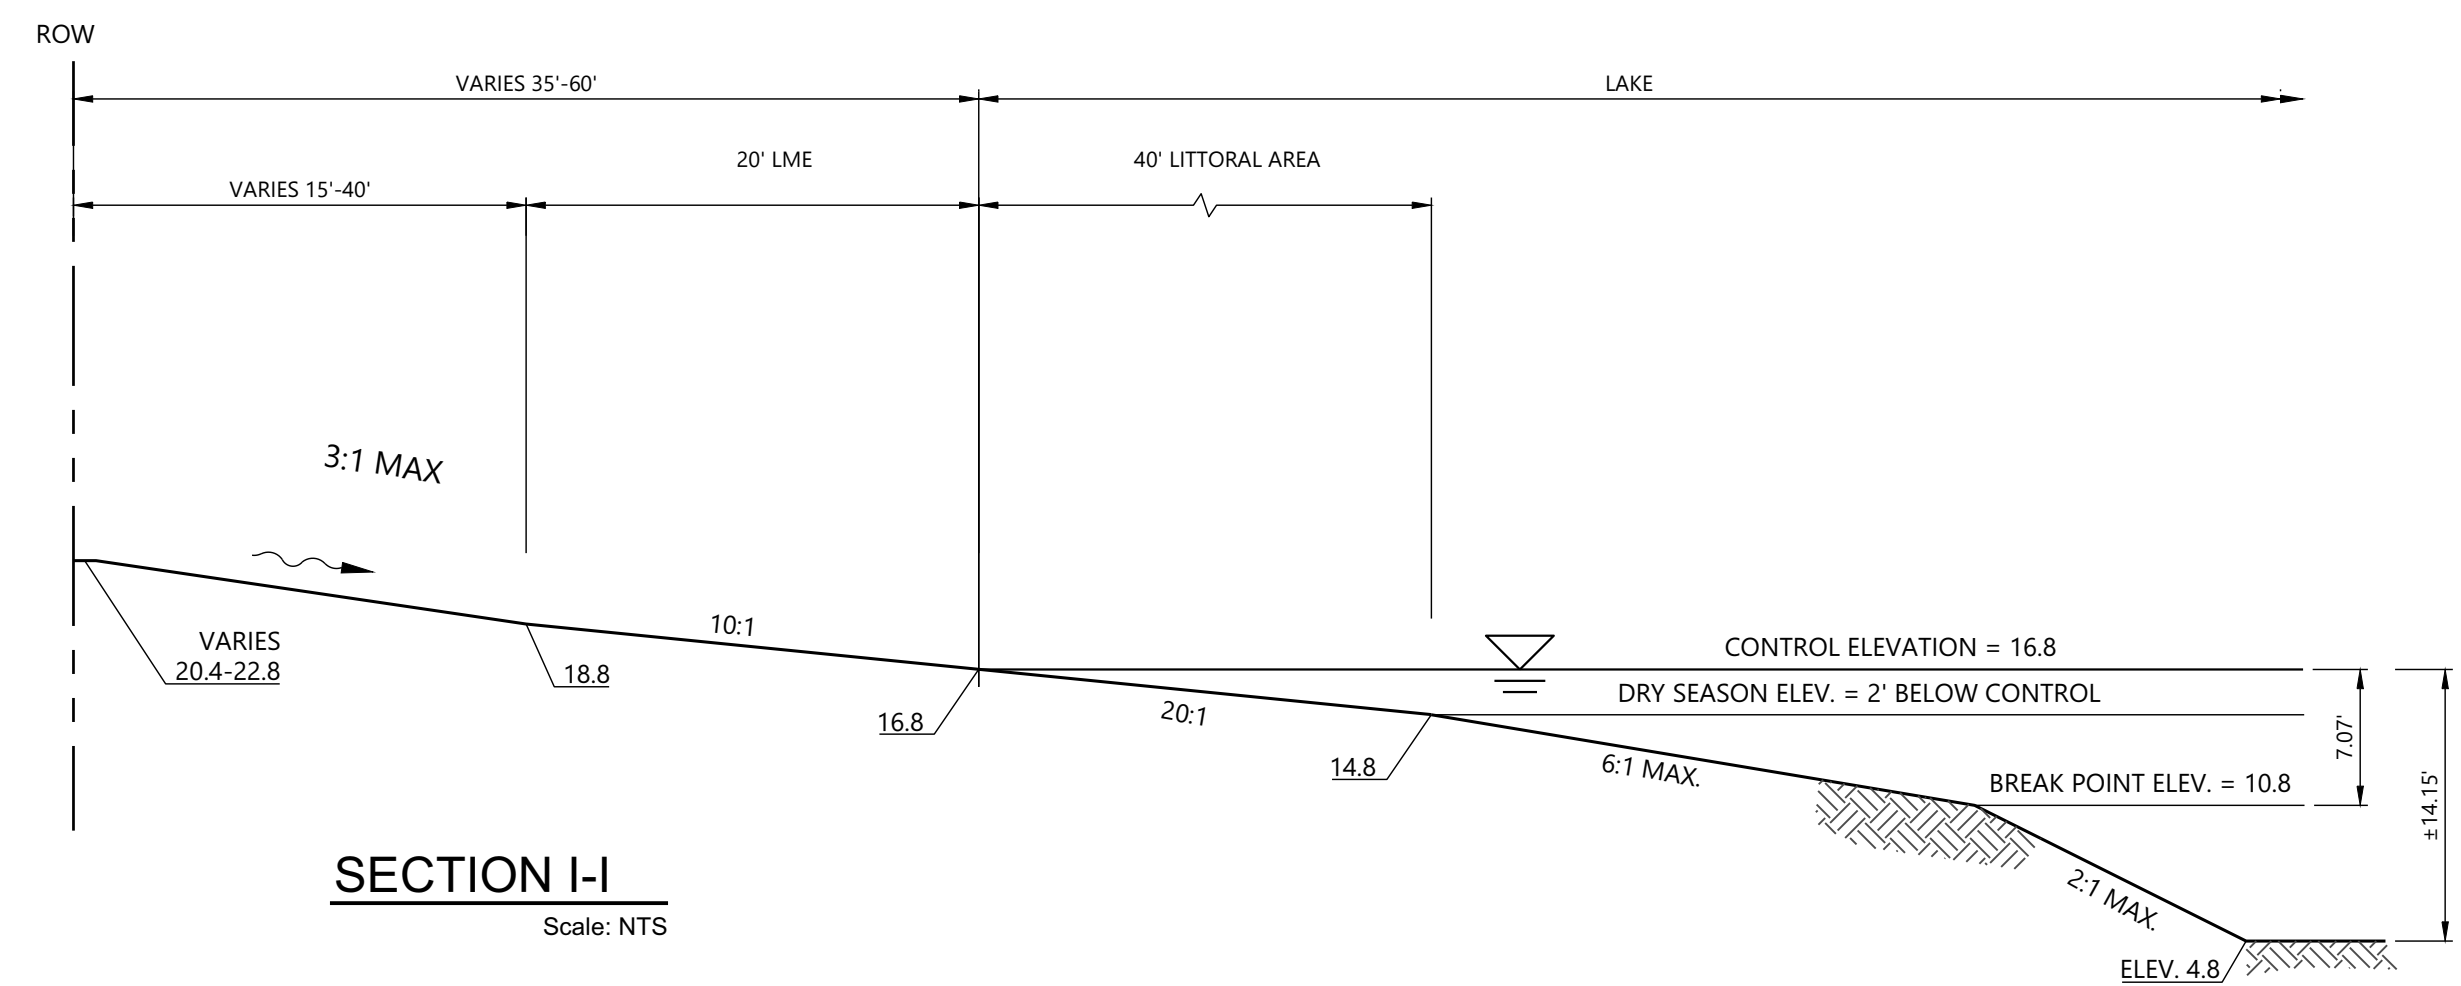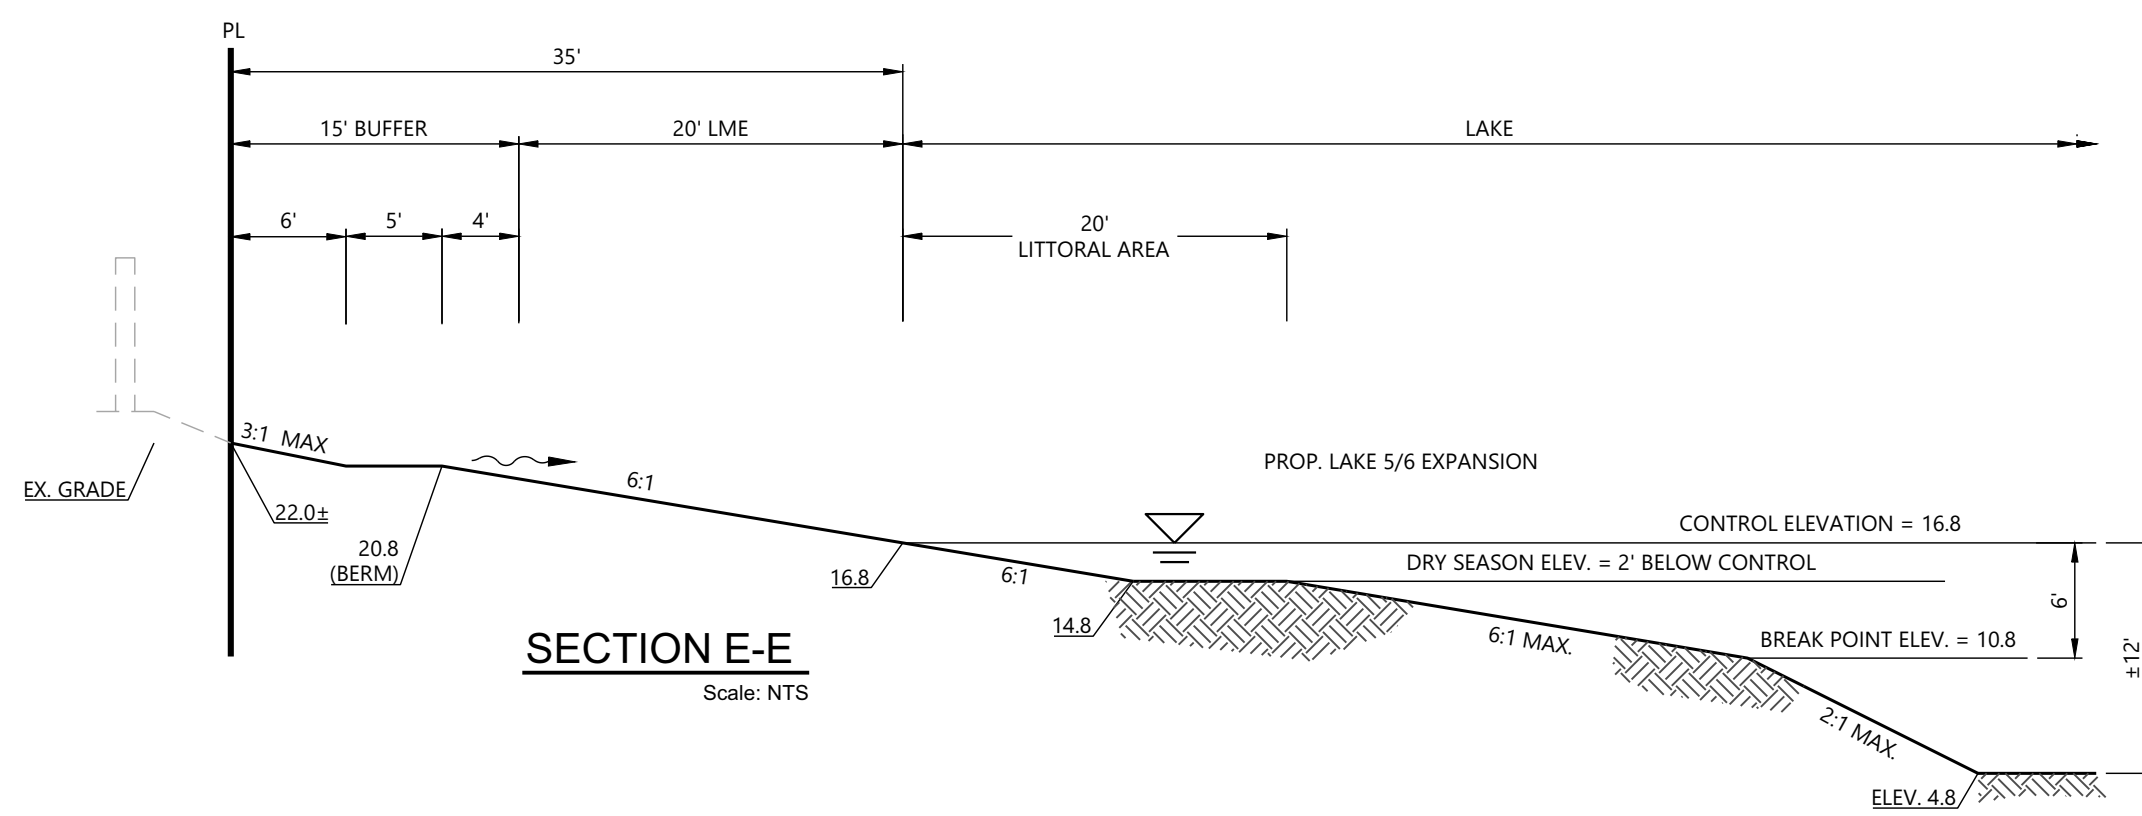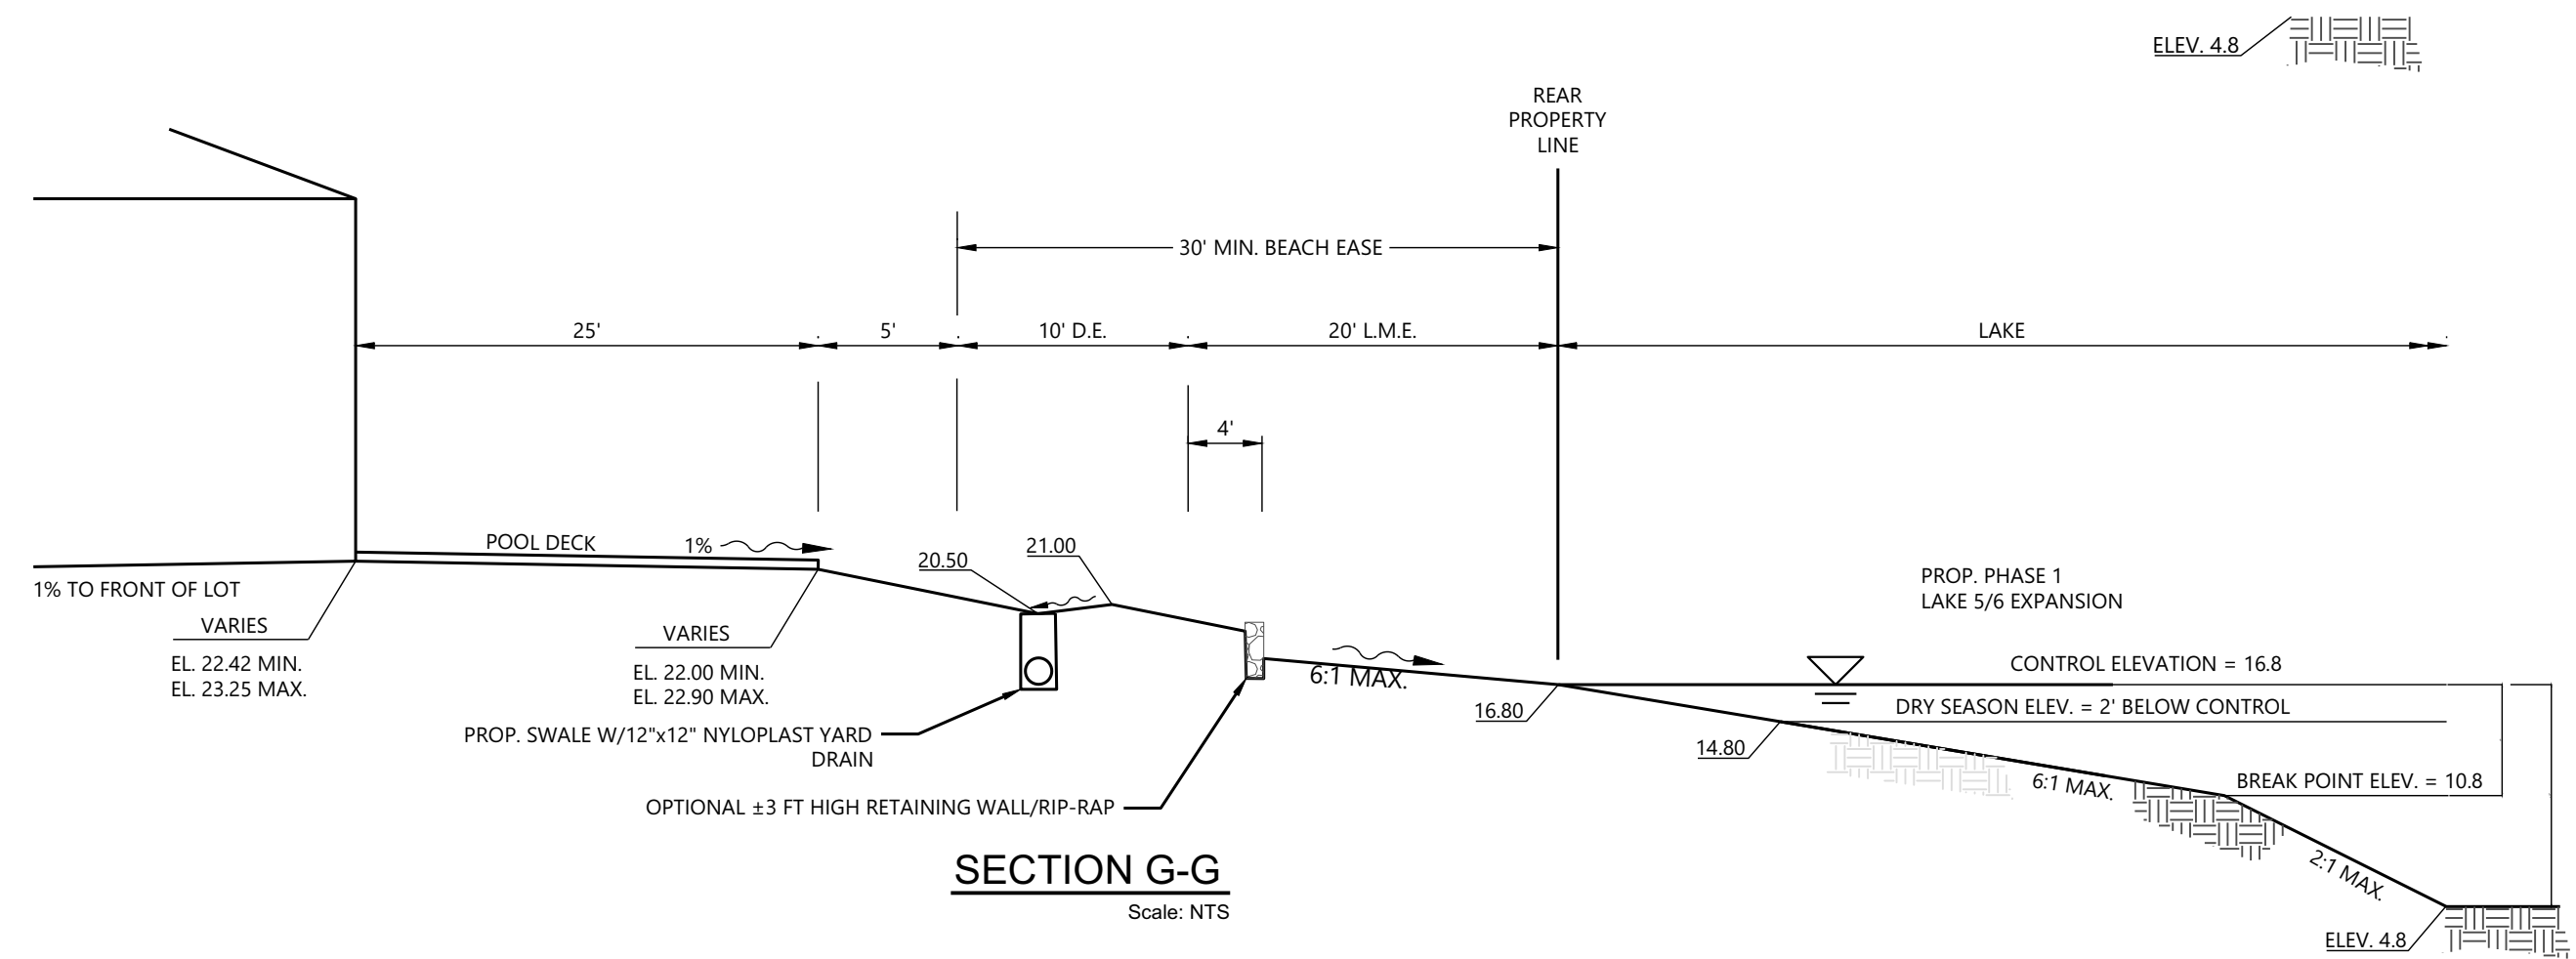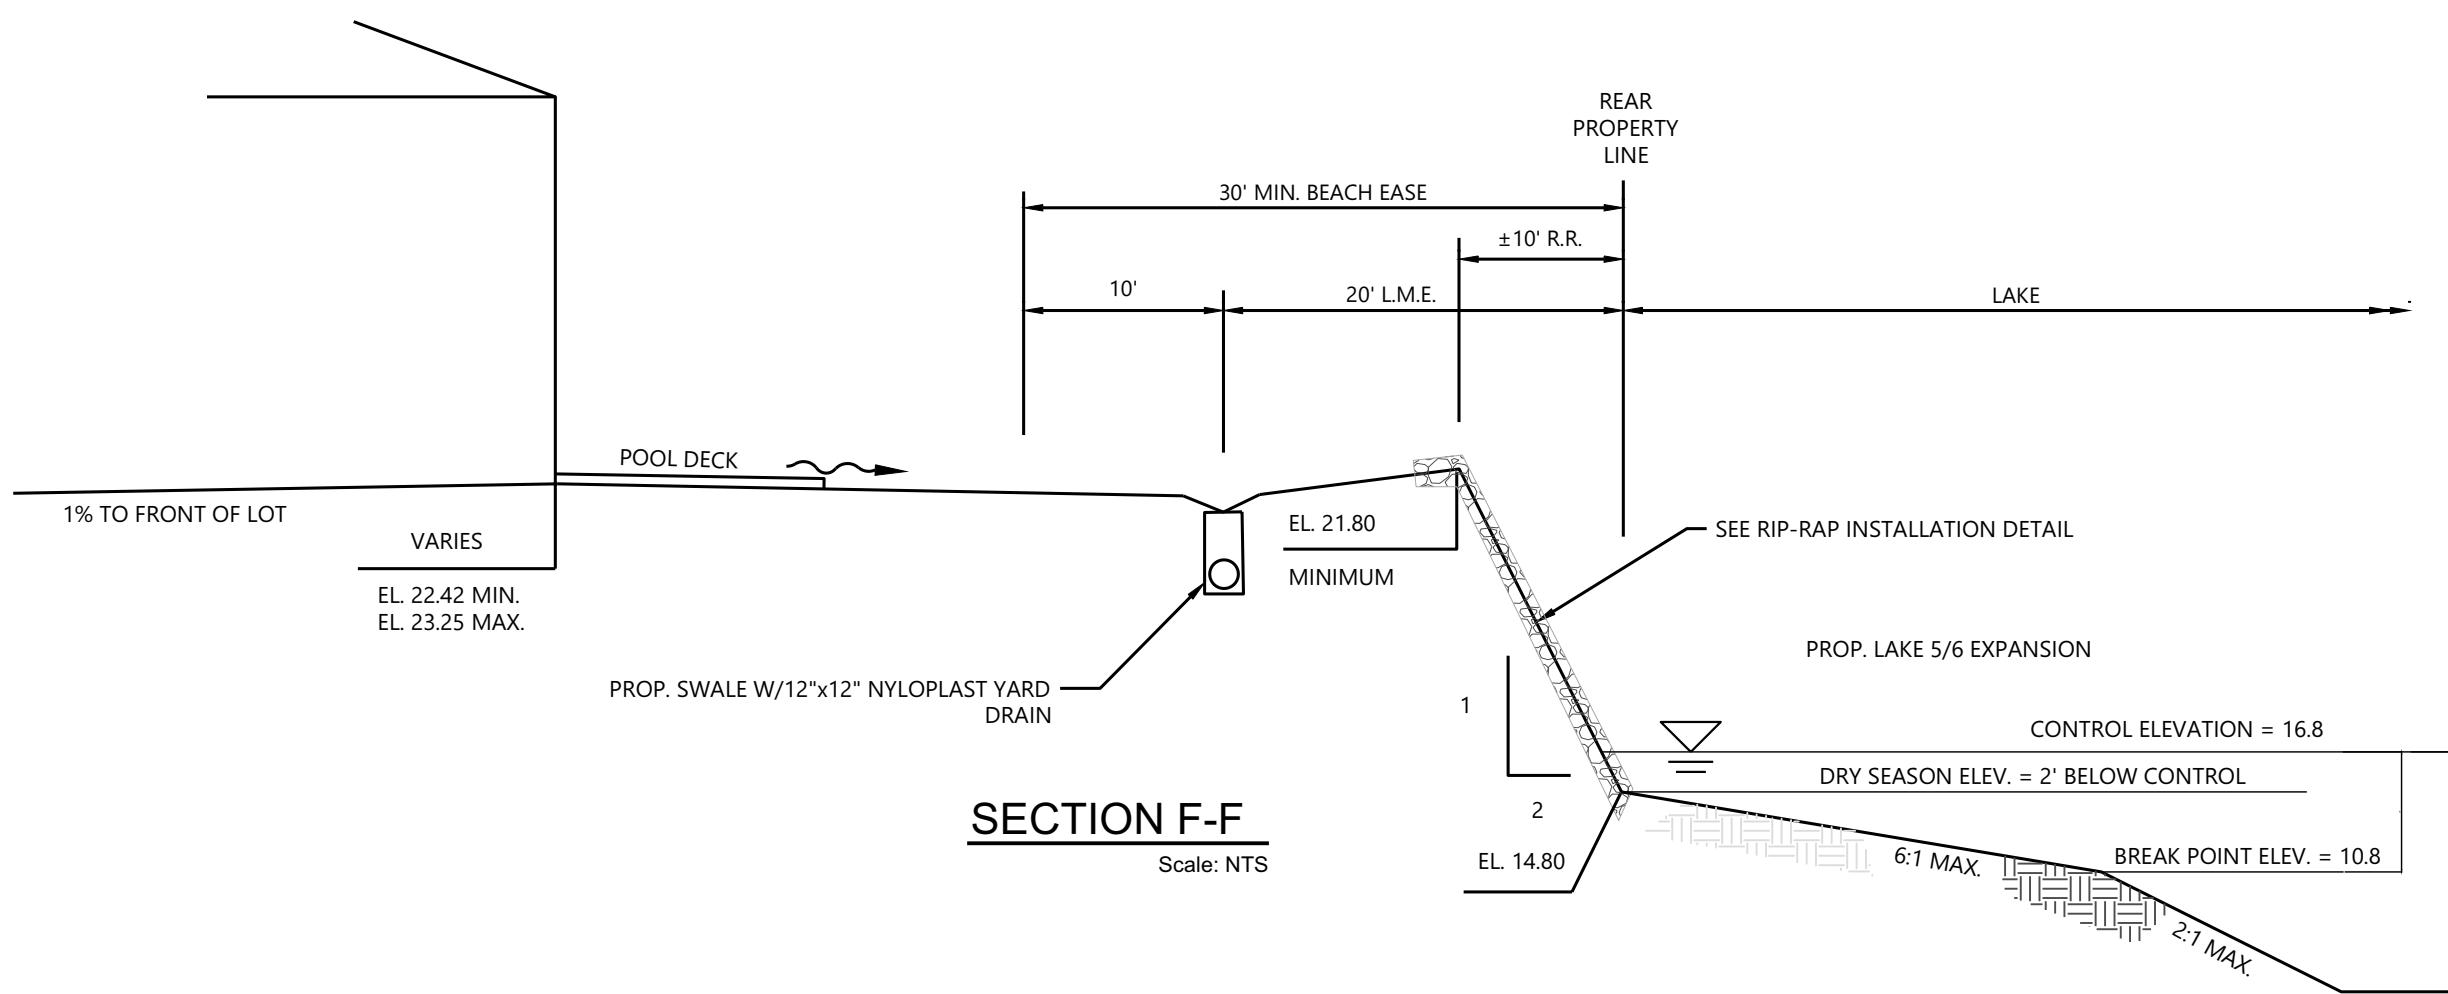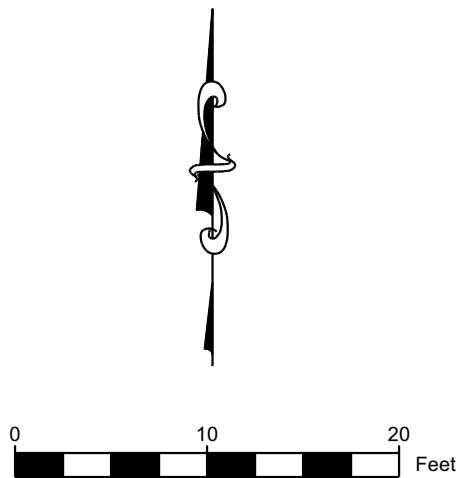

																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					</
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----



**Prestino at Miromar Lakes Request for Final Plan Approval
Schedule of Deviations and Justifications
August 21, 2023**

This project proposes to utilize the following deviations approved by Z-13-020:

DEVIATION (5) from LDC 10-291(3) requirement that a residential development of more than five acres and commercial or industrial development of more than ten acres must provide more than one means of ingress or egress for the development to allow only one means of access. Fire Department approval for Prestino has been obtained.

DEVIATION (7) from LDC 10-296 ("Street Design and Construction Standard") requirement to provide that wearing surfaces for local and access roads for Class A development must be 1.5 inches asphaltic concrete of Florida Department of Transportation Type S-1, to allow for cement concrete or decorative pavers within private local roadways with Miromar Lakes.

Proposed Deviations as part of this request:

Deviation 1:

A request to extend a previously granted administrative deviation, last approved under ADD2020-00138 for additional rip-rap within the Capri Project which is now being changed to the Prestino Project. LDC Section 10-418(3) outlines that a combination of bulkheads, geo-textile tubes, riprap revetments, or analogous fortified shoreline installations is permissible for up to 20 percent of a single lake shoreline. In this case, the request seeks permission to deviate and allow for up to 65% coverage of the intended shoreline for recreational purposes.

Justification: The requested deviation has previously received authorization under ADD2020-00138 to update the last Lake Stabilization Plan which has been approved under previous Final Plan Approvals. The enclosed Final Plan Approval Plans outline the proposed revisions to the Master Lake Stabilization Plan, in the Prestino Project area and areas that referenced past ADD Approvals. This requested variance remains confined to the site and contributes to the fulfillment of the planned development's objectives, preserving the overarching intention of safeguarding public health, safety, and welfare. Additionally, this appeal adheres to the pertinent criteria for administrative deviations, as specified in LDC Section 10-104(b): (1) The alternative to established standards is rooted in robust engineering practices; (2) The proposed alternative upholds the health, safety, and welfare of neighboring landowners and the general public, at least to the same extent as the standard for which the deviation is sought; (3) not applicable; (4) The grant of this variance doesn't conflict with any

explicit policy directives of the County Commissioners' Board, other ordinances, or Lee Plan provisions; and (5) not applicable; and will be provided on the D.O. plat for Prestino.

Deviation 2:

A request for relief from LDC 10-418 requirement which mandates that the use of rip-rap adjacent to single family homes is prohibited. The request seeks permission to deviate and allow for rip-rap placement adjacent to single family homes.

Justification: The requested deviation has previously received authorization under ADD2020-00138.

Deviation 3:

A request for relief from LDC 10-328(a) requirement which mandates that no portion of the required lake maintenance easement may be located within the limits of a platted single-family residential lot to allow lake maintenance easements within the limits of the platted single-family lots within the subject tract.

Justification: The requested deviation has previously received authorization under ADD2020-00138.

Deviation 4:

A request for relief from LDC Section 10-384(c)4 requirement which mandates that the longest permissible length of a dead-end water line should not surpass 1,000 feet. The request seeks permission to deviate and allow for the proposed dead-end water line to exceed the 1,000 feet limitation.

Justification: The requested deviation has previously received authorization under ADD2020-00071 for the Capri Project which is now being changed to the Prestino Project. The appeal for deviation is encompassed within the list of provisions outlined in LDC Section 10-104(a)(15), granting the Development Services Director the authority to administer such deviations. There is an existing 12" water main that terminates at the southern boundary of Prestino on Lake Maggiore Drive. An 8" water main is proposed in Prestino which extends approximately 250 feet to the cul-de-sac at Prestino Isle Place. Approximately 400 ft south of Prestino, there is a water main that connects to Ben Hill Griffin Parkway. Given that this is the final project at Miromar's northern boundary, future extensions are not anticipated. The dead-end main meets the necessary fire flow criteria and thorough hydrologic modeling confirms that the proposed configuration adequately ensures fire protection.

The appeal is in alignment with the pertinent criteria outlined for administrative deviations as detailed in LDC Section 10-104(b): (1) The proposed alternative to the established standards is rooted in sound engineering practices. (2) The alternative maintains a level of consistency no less than the standard being deviated from, in terms of safeguarding the health, safety, and welfare of neighboring landowners and the general public. (3) Not applicable in this

context. (4) The approval of this deviation doesn't contradict any explicit policy direction from the Board of County Commissioners, nor does it conflict with any other ordinance or provision within the Lee Plan. (5) Not applicable. (6) Not applicable.

Deviation 5:

A request to extend a previously granted administrative deviation, sanctioned under LDC 10-256(2)(c) which requires a pedestrian way along one side of all streets internal to a residential development to allow no sidewalk.

Justification: The requested deviation has previously received authorization under ADD2020-00138 for an adjacent neighborhood. We believe that constructing a sidewalk within the single-family neighborhood is not suitable. Sidewalks have already been established along all internal roads that connect various neighborhoods. Introducing a sidewalk to this specific neighborhood would deviate from the consistent approach adopted in all prior developments within Miromar Lakes.

RESOLUTION OF THE BOARD OF COUNTY COMMISSIONERS
OF LEE COUNTY, FLORIDA

WHEREAS, Miromar Lakes, LLC, filed an application on behalf of the property owner, Florida Gulf Coast University, to amend the Miromar Lakes DRI Development Order and Mixed Use Planned Development (MPD); and

WHEREAS, a public hearing before the Lee County Zoning Hearing Examiner, Laura B. Belflower, was advertised to be held on September 4, 2013. On September 4, 2013, the Hearing Examiner introduced herself and the case for the record. A mutual continuance request was discussed and everyone agreed to continue the subject case to October 16, 2013, with the 17th, 18th, and 30th being held as reserved dates for further testimony, if necessary; and

WHEREAS, on October 16, 2013, October 17, 2013, October 18, 2013, and October 30, 2013 the public hearing was held. At the conclusion of the hearing on October 30, 2013, it was agreed that continuing the hearing to November 8th, 13th and 21st was in the best interests of all concerned; and

WHEREAS, on November 8, 2013, November 13, 2013, and November 21, 2013 the public hearing was held. At the conclusion of the hearing on November 21, 2013, it was agreed that continuing the hearing to December 6, 2013 to allow additional time for the Applicant, the Staff, and the public to present additional evidence and testimony; and

WHEREAS, on December 6, 2013 the public hearing was held. At the conclusion of the hearing on December 6, 2013, the Hearing Examiner left the record open and requested Staff and the Applicant to submit written submissions to her Office on or before December 20, 2013, January 10, 2014, and January 24, 2014; and

WHEREAS, on January 22, 2014, the Hearing Examiner granted an extension of the written submittal date to February 14, 2014; and

WHEREAS, the Hearing Examiner gave full consideration to the evidence in the record for Case #DRI2012-00021 and DCI2013-00008, and recommended APPROVAL of the Request; and

WHEREAS, a second public hearing was advertised and held on June 18, 2014 before the Lee County Board of Commissioners; and,

WHEREAS, the Lee County Board of Commissioners gave full and complete consideration to the recommendations of the staff, the Hearing Examiner, the documents on record and the testimony of all interested persons.

NOW, THEREFORE, BE IT RESOLVED BY THE BOARD OF COUNTY COMMISSIONERS:

SECTION A. REQUEST

The applicant filed a request to amend the Miromar Lakes DRI Development Order and MPD. The request includes:

- Relocating approved commercial uses from the northern part of the MPD to the southern part of the MPD and replacing the northern commercial with residential uses;
- Introducing a flexible category allowing approved commercial and residential uses in a small north area of the MPD and a large area east of Florida Gulf Coast University (FGCU);
- Adding multiple-family dwelling uses in the southeastern quadrant of the project;
- Changing some uses allowed in the R-2 designation; and
- Delineating height potentials uniformly.

The property is located in the University Community, Wetlands and Conservation Wetlands and Uplands Future Land Use Categories and is legally described in attached Exhibit A. The request is APPROVED, SUBJECT TO the conditions and deviations specified in Sections B and C below.

SECTION B. CONDITIONS:

All references to uses are as defined or listed in the Lee County Land Development Code (LDC).

1. a. Development of this project must be consistent with the:
 - i. One-page Master Concept Plan (MCP) entitled "Miromar Lakes DRI Master Concept Plan," prepared by Delisi Fitzgerald, Inc., date stamped received JUL 11 2014 and attached hereto as Exhibit C, except as modified by the conditions below.
 - (1) Development must comply with all requirements of the LDC at time of local development order approval, except as may be granted by deviation as part of this planned development.
 - (2) If changes to the MCP are subsequently pursued, appropriate approvals will be necessary.
 - (3) The southern boundary of the project shown on the MCP must correspond to the north Estero Parkway Extension right-of-way line as it existed in 2014 on the date of the approval of this MPD amendment. This boundary must be noted on the MCP as the Miromar Lakes southern boundary. All other graphics that show the southern project boundary must also reflect the right-of-way as the boundary.
 - (4) The scale of the MCP must be clearly indicated and be an accurate scale for the size of paper that will constitute the official copy of the MCP.
 - ii. The current Miromar Lakes DRI Development Order, as may be amended.

- iii. Administrative amendments, including final plan approvals and deviations for existing developments within Miromar Lakes MPD, are still valid including:

ADD2013-00045	ADD2012-00110	ADD2010-00021
ADD2009-00026	ADD2008-00144	ADD2008-00130
ADD2006-00009	ADD2006-00004	ADD2006-00002
ADD2005-00190	ADD2005-00134	ADD2005-00104
ADD2004-00253	ADD2004-00223	ADD2004-00177A
ADD2004-00176	ADD2004-00074	ADD2004-00070
ADD2004-00054	ADD2004-00045	ADD2004-00042
ADD2004-00033	ADD2003-00047	ADD2003-00028
ADD2002-00168	ADD2002-00077	ADD2002-00045
ADD2001-00142	ADD2001-00125	ADD2001-00113A
ADD2001-00085	ADD2001-00018	ADD2000-00191
ADD2000-00161	ADD2000-00117	ADD200-00111
ADD2000-00110	ADD2013-00146	

Zoning Resolutions #Z-12-004, #Z-10-019, #Z-06-064, #Z-02-072, #Z-99-029 and administrative amendment ADD2012-00055 are null and void as a result of approval of this zoning action, and are superseded by this zoning resolution.

- b. Development of the property is limited to the following parameters:

USE	PARAMETERS OF DEVELOPMENT	TOTAL UNITS	ACRES
Single-family Residential	700 du	2,600	
Multiple-family Residential	1,900 du		
Retail Commercial	250,000 sq ft (GFA)		
Office	340,000 sq ft (GFA)		
Research & Development	40,000 sq ft (GFA)		
Hotel	450 rooms		
Lakes/Miscellaneous Recreation/Buffers	N/A		312
Conservation Areas	N/A		344.7

Notes:

- The club uses may each include up to 10,000 square feet of retail uses, which are ancillary to the residential uses and do not count against the project's approved total commercial square footage.
- Commercial uses within an Assisted Living Facility are limited to Personal Services, Groups I-III, excluding massage parlors unless in conjunction with a chiropractor or other medical facility, and a total floor area not to exceed 10 percent of the total residential area contained therein, exclusive of vehicular parking and service areas.
- In reference to the above table, single-family residential uses include zero-lot line, duplexes, two-family attached, and townhome dwelling types.

- iv. See approved Master Concept Plan for acreage within residential, commercial, lakes/miscellaneous recreation/ buffers, mixed use, and conservation areas.
 - v. See also Condition 31 for retail commercial and office square footage limitations.
 - vi. Dwelling unit types and office uses may be converted in accordance with DRI Development Order Section II.D.7, but must remain consistent with Condition 24.
- c. The developer must obtain Final Plan Approval (FPA) when parcel development includes vertical (structural) development or when further administrative deviations, as permitted by the LDC, are requested. All administrative deviations must be processed in accordance with the LDC. If FPA is required, then the developer must file an application prior to, or simultaneous with, a local development order that proposes vertical development. The purpose of this process is to ensure that vertical development is generally in compliance with the approved zoning resolution, MCP and DRI Development Order, while at the same time allowing flexibility in response to changing development practices.
- d. The Application for Administrative Action for Final Plan Approval must include the following additional information:
- i. Type and amount of uses, i.e. the number of residential dwelling units, total square feet of commercial uses, or other measures of intensities;
 - ii. an ongoing tabulation of the total number of residential dwelling units, commercial square footage, and other measures of intensity that have received local development order approval;
 - iii. location and dimensions of access points; internal roadways; buildings/structures and parking spaces/areas;
 - iv. setbacks and building heights;
 - v. certified sketch of and description of perimeter boundary of development tract;
 - vi. adjacent zoning and land uses;
 - vii. buffers and landscape strips required or proposed;
 - viii. open space, including an ongoing tabulation of required open space; and
 - ix. detail drawings showing the location and application of deviations.
2. The Schedule of Uses and Property Development Regulations are set forth in Exhibit D.
3. Hurricane Mitigation
- a. The developer must initiate the establishment of a property owner's or resident's association(s). The organization must provide an educational program on an annual basis, in conjunction with the staff of Emergency Management, which will provide literature, brochures and technical assistance for Hurricane Awareness/Preparedness Seminars, describing the risks of natural hazards. The intent of this recommendation is

to provide a mechanism to educate residents concerning the actions they should take to mitigate the dangers inherent in these hazards.

- b. The developer must formulate an emergency hurricane notification and evacuation plan for the development, which will be subject to review and approval by the Lee County Office of Emergency Management prior to issuance of a local development order.
 - c. The developer's proportionate share payment of \$10.9 million for the development's impacts on significantly and adversely impacted roadway network, including Alico Road, will adequately mitigate the development's hurricane evacuation impacts.
4. If access to this development or into portions of this development is through a security gate or similar device, which is not manned twenty-four hours a day, the gate must be equipped with an override strip installed in a glass-covered box to be used by drivers of emergency vehicles to gain entry consistent with LDC §34-1748.
5. If required by federal, state or local regulations:
- a. The purchaser/end user of parcels that will be used to store, manufacture, or use hazardous materials, must contact the Lee County Office of Emergency Management Hazardous Material Representative, to discuss the proposed development in relation to the potential type, use, and storage of hazardous materials that will be located on the premises.
 - b. The purchaser/end user must prepare or have available material safety data sheets (MSDS) and submit either copies of MSDS or a list of chemicals to the appropriate local fire district and to the Lee County Division of Public Safety.
 - c. The applicant must establish an emergency notification system to be used in the event of a hazardous material release.

6. Agricultural Uses

Agriculture is not approved as a permanent use in the Schedule of Uses for this property. All agricultural uses must cease upon approval of the requested rezoning, except as follows:

- a. Existing bona fide agricultural uses as shown on attached Exhibit E may continue and plant nurseries may be instituted until approval of a local development order for the area of the project containing those uses.
- b. Additional clearing of trees or other vegetation in agricultural areas is prohibited. Existing areas of bona fide agricultural use may be maintained, i.e., mowed, but not cleared or expanded. This prohibition is not intended to preclude County approved requests for the removal of invasive exotic vegetation.
- c. The property owner must terminate the agricultural tax exemption for any portion of the property that receives a local development order, except for a local development order obtained by or on behalf of Florida Gulf Coast University for access, drainage, utility extension, or other improvements associated with the southern and eastern access through the Miromar Lakes property to the University.

The agricultural use must cease by December 31st of the calendar year in which the local development order is issued. The exemption termination must be filed with the Property Appraiser's Office by December 31st of the calendar year in which the local development order is issued. A copy of the exemption termination must be provided to the Office of the County Attorney.

7. The development must comply with LDC §34-1010 for any tall structures including permanent buildings, antenna supporting structures, wireless communications facilities and temporary construction cranes.
8. The development of helistop(s) within the Miromar Lakes MPD is subject to review and approval by the Florida Department of Transportation (FDOT) and the Lee County Port Authority. Helistops are prohibited within 500 feet of the Miromar Lakes southern boundary.
9. Prior to local development order approval for property that includes Big Cypress Fox Squirrel habitat, the developer must amend the draft "Big Cypress Fox Squirrel Management Program" counter-stamped July 6, 1998, as amended on January 2002, (Exhibit F) to meet the requirements of the Department of Economic Opportunity (DEO) and the Southwest Florida Regional Planning Council. The developer must provide evidence of the management plan approval and the finalized management plan must be adopted as part of the local development order. Prior to issuance of a Vegetation Removal Permit, the developer must resurvey the property south of Stewart Cypress Slough specifically for Big Cypress fox squirrel nests. The developer must barricade and maintain a 75-foot radius undisturbed buffer around all active nests until after all young fox squirrels leave the nest or the squirrels and nest are relocated. The developer must first coordinate with and must receive approval for any relocation activities from the Florida Fish and Wildlife Conservation Commission.
10. Prior to issuance of a local a development order, the developer must:
 - a. Resurvey the gopher tortoise habitat west of the preserve depicted within the area south of Stewart Cypress Slough and east of Ben Hill Griffin Parkway specifically for gopher tortoises and burrows; and
 - b. Submit a final gopher tortoise management plan for off-site relocation to the Division of Environmental Sciences Staff for review and approval.
11. The developer must provide educational materials describing the eastern indigo snake and regulations related to its protection/listed status to field survey and construction crews prior to commencement of construction activities. A qualified biologist must be present during the construction clearing phases of the project for the first week, with at least two spot checks per week thereafter, to survey ahead of clearing activities and to verify that appropriate steps are being followed to protect these snakes. If an indigo snake is located, the clearing operations must cease until the developer secures the snake, relocates it to an appropriate preserve, and notifies the Division of Environmental Sciences Staff that an indigo snake was found and relocated.
12. At the time of local development order submittal, the "Miromar Lakes Snail Kite Management Plan" dated January 11, 1999 (Exhibit G) must be revised and provided for Division of Environmental Sciences review and approval. The plan must include a

narrative of how the cattails will be managed to allow more open waters within the borrow lakes to provide snail kite foraging areas. Commitments must be made to conduct the recommended management activities.

13. All residents must be provided with an informational pamphlet regarding the protection of alligators and how to live with alligators. Prior to local development order approval, the developer must submit a copy of this pamphlet to the Division of Environmental Sciences Staff for review and approval.

Two signs must be placed within the golf course south of Stewart Cypress Slough, one near the clubhouse and one half way through the course, that informs golfers of the presence of alligators and that it is illegal to feed or harass alligators. Prior to local development order approval, the development order plans must provide detail of the signs including wording and size, and the location of the signs must be delineated on the landscape plans.

14. Prior to issuance of a local development order for property containing least terns or its habitat, suitable habitat for least terns must be re-surveyed during the least tern nesting season (April - August). If least tern nesting is documented on the property, the developer must submit a management plan per LDC §10-474.
15. Prior to local development order approval, the plans must include open space calculations and delineate how the required open space will be provided in compliance with the "Miromar Lakes Open Space and Indigenous Preservation" requirements attached as Exhibit H.
16. The developer must make reasonable efforts to preserve existing native vegetation within common open space areas including the golf course and lakes in the final design. This requirement will not be interpreted in a manner to impair good golf course design, or to reduce the overall number of residential dwelling units approved for the project. The developer must hold an onsite preconstruction meeting with Division of Environmental Sciences Staff, prior to the issuance of a vegetation removal permit for any phase of development, to confirm preservation and barricading requirements prior to the initiation of site clearing.
17. The paving, grading and landscape plans must delineate for preservation the area dominated by cypress canopy and identified as Florida Land Use and Cover Classification System (FLUCCS) code 621E1 on the Environmental Resource Permit (ERP) FLUCCS map and generally identified on attached as Exhibit I, prior to local development order approval.
18. Prior to approval of local development order, the plans must indicate the following:
 - a. If the northern crossing is selected in accordance with Condition 29, the roadway abutting the conservation area ("CO") south and southeast of the Florida Gulf Coast University (FGCU) campus must provide a wildlife underpass or bridge which will accommodate both Florida black bear and Florida panther. The wildlife underpass must, at a minimum, provide an area equivalent to two 4-foot by 10-foot culverts placed side by side with a maximum 45-foot length (crossing under the road width); and

- b. A single row native shrub hedge along both sides of the road (planted at a minimum 24-inch height; maintained at a minimum 6-foot height); and
 - c. Roadway signage including "Wildlife Crossing" signs and a maximum 20 mph speed limit signs along the portion of the road abutting the conservation area for all traffic. The design of the signs and location must be shown on the development order plans; and
 - d. If the southern crossing is selected in accordance with Condition 29, the requirement for a wildlife underpass will be determined by the applicable state and federal agencies at the time of permitting.
- 19. Prior to issuance of a Certificate of Compliance for any local development order that requires a dumpster, the dumpsters must be wildlife-proofed to discourage bear foraging. The developer must provide information to employees and residents regarding Florida black bears including details of proper disposal of garbage to prevent bear foraging in dumpsters and garbage cans. Prior to local development order approval, a copy of the Florida black bear brochure must be submitted to the Division of Environmental Sciences (DES) Staff for review and approval.
- 20. Any outdoor entertainment that occurs less than 500 feet from the Miromar Lakes southern boundary must be oriented to direct noise output to the north and west, thereby directing noise output away from residential properties to the south of Estero Parkway and the Density Reduction/Groundwater Resource (DR/GR) lands to the east. This condition applies to outdoor entertainment that is not in conjunction with consumption on premises, and which may be associated with residential or non-residential uses. Outdoor entertainment for the purpose of this condition is defined as live music or other entertainment activities that utilize amplified speaker systems or sound systems. Compliance with this condition does not alter the applicability of any other noise control ordinance or restriction throughout the MPD
- 21. Outdoor seating in conjunction with consumption on premises is prohibited within 500 feet of a religious facility, school (noncommercial), day care center (child), park or dwelling unit under separate ownership except as approved by Deviations 3 or 30, or as an amendment to the MPD. In no case shall outdoor seating in conjunction with consumption on premises be permitted within 500 feet of residential lots within Grandezza. Distances shall be measured in accordance with LDC §34-1264(b)(1).
 - a. Prior to local development order approval for any new or redesigned outdoor seating areas in conjunction with consumption on premises that are located less than 800 feet from the Miromar Lakes southern boundary, which includes outdoor seating areas in conjunction with consumption on premises associated with restaurants, the bar, clubhouses, recreational facilities, mixed uses, commercial uses, or residential uses, the following must be obtained:
 - i. An Administrative Amendment, which includes a site plan, showing the proposed location and square footage of the outdoor seating area, and the proposed hours of operation for the outdoor entertainment.
 - ii. The site plan must identify noise mitigation measures, including building orientation, perimeter plantings, water features/fountains, and/or other sound reducing materials to ensure the development will be in compliance with the Noise

Control Ordinance, codified in Lee County Code of Ordinances Chapter 24½, as amended, and any other applicable noise control regulations.

- iii. The site plan must demonstrate that outdoor noise activities, including but not limited to music, live entertainment, or other activities that utilize amplified speaker systems or similar sound systems, are designed so that the size of the systems are commensurate with the size of the space and designed and installed to direct noise output to the north and west, thereby directing noise output away from residential properties to the south of Estero Parkway and the DR/GR lands to the east.
 - iv. For the purposes of this condition, outdoor seating shall be defined as seating in non-roofed areas or portions of buildings that are not fully enclosed or operate with open windows or doors.
 - v. If the same business or premises has more than three (3) citations (findings of violation) from the Lee County Sheriff's Office, or applicable regulatory agency, relating to violations of the Noise Control Ordinance or other applicable noise control regulation, the matter may be referred to Lee County Code Enforcement and may result in a code violation proceeding as a violation of this zoning resolution.
 - vi. This local development order approval does not prohibit the owner from obtaining a Temporary Use Permit or a special event permit as provided for in LDC §34-210.
 - b. The provisions of subparagraph "a" of this condition do not apply to outdoor seating areas in conjunction with consumption on premises that are located a distance of 800 feet or greater from the Miromar Lakes southern boundary.
 - c. The provisions of subparagraph "a" of this condition only apply to consumption on premise with outdoor seating. The noise abatement, distance requirements, or other restrictions set forth in subparagraph "a" do not apply to consumption on premises that is located within a fully enclosed building that does not operate with open windows or doors.
 - d. Nothing in this condition will alter the required compliance with the Noise Control Ordinance or any other applicable noise control regulations.
22. Bicycle and pedestrian connections to FGCU will be provided in accordance with Exhibit "D" of the Miromar Lakes DRI DO.
23. Future access to County Road 951 will be subject to the recommendations set forth in the PD&E for that roadway.
24. The project will provide a mix of housing types with densities sufficient to meet the needs of and be designed to accommodate the varying lifestyles of students, faculty, administration, other university personnel and employees of the associated support development in accordance with Lee Plan Policy 18.1.2.
- a. Maximum clustered density is limited to 12 dwelling units per net acre within 150 feet of the Miromar Lakes southern boundary in the southeastern R-2 parcel, which is

generally located south of FGCU, east of Ben Hill Griffin Parkway, and east of the conservation area.

- b. In all other locations within the MPD, the maximum clustered density is 15 dwelling units per net acre in order to accommodate university housing.
25. Each single-family lakefront lot is allowed to have one dock. Single-family lakefront lot docks may be converted to multiple-family slips for wet boat storage on a one for one (1:1) basis. An additional 250 (maximum) ancillary slips for wet boat storage are allowed on the lake. A maximum 400 slips for dry boat storage are allowed in conjunction with the Boat Club. All structures utilized for dry boat storage must comply with the design standards for commercial buildings provided in LDC §10- 20. In the alternative, and subject to review by the Director in conjunction with final plan approval, the developer may construct the following buffers along any portion of the structure that does not comply with the commercial design standards:

- a. Buffer on the west property line:

Minimum width: 50 feet

Berm and Palms: Palms must be planted in double staggered rows and spaced 10 feet on center. The combination of these required palms and any berm along the west property line must be between 26 feet and 30 feet at installation. Trees of no less than four inches in diameter at 12 inches above the ground and no less than 16 feet in height at the time of planting may substitute for some of the palms (1 tree = 2 palms).

Hedges: Hedges must be planted in double staggered rows. Shrubs must be a minimum 10-gallon container size and be spaced 36 inches on center. They must be at least 48 inches in height at installation and maintained in perpetuity at a height of no less than 60 inches.

- b. Buffer on the south property line:

Minimum width: 25 feet

Berms and Palms: Palms must be planted in double staggered rows and spaced 10 feet on center. The combination of these required palms and any berm along the west property line must be between 26 feet and 30 feet at installation. Trees of no less than four inches in diameter at 12 inches above the ground and no less than 16 feet in height at the time of planting may substitute for some of the palms (1 tree = 2 palms).

Hedges: Hedges must be planted in double staggered rows. Shrubs must be a minimum 10-gallon container size and be spaced 36 inches on center. They must be at least 48 inches in height at installation and maintained in perpetuity at a height of no less than 60 inches.

- c. The developer must provide a Type "D" buffer on the east property line.
- d. No buffer is required along the water's edge (the north property line).

At least 75 percent of the trees and 50 percent of the shrubs used to fulfill these requirements must be native Florida species

26. Timeshare units may be developed within the C-1 areas SUBJECT TO the following conditions:
 - a. The units must be in conjunction with a bona fide hotel use; and
 - b. The units must not exceed 25 percent of the total number of rooms being constructed as part of the hotel use.
27. Approval of this rezoning does not guarantee local development order approval. Future development order approvals must satisfy the requirements of the Lee Plan Planning Communities Map and Acreage Allocations Table, Map 16 and Table 1(b).
28. As part of any local development order approval for vertical development, the development order plans must include facilities in compliance with LDC §10-261 and Solid Waste Ordinance #11-27 for the pick-up/disposal of solid waste and recyclables. The minimum area required for, and specific locations of, these facilities will be reviewed at the time of local development order application
29. There may only be one roadway crossing of the large southern central conservation area. The MCP demonstrates two (2) proposed crossings. One crossing will be eliminated contingent on successful jurisdictional agency permitting of the other crossing.
30. Issuance of a development permit by Lee County does not in any way create any rights on the part of the applicant to obtain a permit from a state or federal agency and does not create any liability on the part of the County for issuance of the permit if the applicant fails to obtain requisite approvals or fulfill the obligations imposed by a state or federal agency or undertakes actions that result in a violation of state or federal law.
31. A maximum of 150,000 square feet of commercial retail uses (including Restaurants, Groups I-IV, and Restaurants, Fast Food) and a maximum of 50,000 square feet of office uses may be developed in the "C-1" and "C-S" parcels located south of FGCU and east of Ben Hill Griffin Parkway.
32. The following performance standards apply to development within the "C-S" parcel east of Ben Hill Griffin Parkway and immediately north of the Estero Parkway Extension, as depicted on the MCP.
 - a. Retail uses are limited to a "neighborhood commercial" scale, which is defined by the Lee Plan as 2 to 10 acres in size with the gross floor area of retail uses ranging from 30,000 square feet to 100,000 square feet. The retail uses shall provide for the sale of convenience goods and personal services, which include but are not limited to, food, drugs, sundries and hardware items.
 - b. If service/loading areas for the delivery of goods associated with supermarkets (defined as Food Stores, Group I) and/or Lawn and Garden Supply stores are adjacent to the future Estero Parkway Extension, a Type "C" buffer will be provided as defined in LDC §10-416(d). The Type "C" buffer will be limited to the portion of the property line where the service/loading area is adjacent to the right-of-way. For the purpose of this condition, adjacent shall be defined as a development scenario where the public entrances to the building are oriented towards the north, west, and/or east, and the loading and services areas are oriented towards the south and within 50 feet of the

- Miromar Lakes southern boundary. If service/loading areas are not adjacent to the Estero Parkway Extension right-of-way in the "C-S" parcel, perimeter buffers will be provided in accordance with the LDC.
- c. If self-service fuel pumps are developed within the C-S parcel, the pumps will be screened from the Estero Parkway right-of-way via an intervening building, which may include the associated convenience food and beverage store or other associated building. If an intervening building is not constructed prior to issuance of Certificate of Completion for the self-service fuel pumps, a Type "C" buffer will be provided in accordance with LDC §10-416(d) along the portion of the property line or tract line where the fuel pumps are the abutting use.
 - d. Retail buildings are limited to 35 feet in height. Buildings containing office uses, non-retail uses, and/or buildings where office or non-retail uses are located above the first floor may be constructed to a maximum height of 45 feet. A building that exceeds 35 feet in height must provide architectural details on the south side of the building that are consistent with the architectural details on the front of the building.
- 33. Multiple-family buildings greater than 35 feet in height located in the "R-2" parcel south of FGCU, east of Ben Hill Griffin Parkway and east of the conservation area, must be set back 150 feet from the Miromar Lakes southern boundary.
 - 34. Active recreational uses located outside of a building, such as outdoor sport courts, swimming pools, playgrounds, and sports fields, located in the R-2 parcel located south of FGCU, east of Ben Hill Griffin Parkway and east of the conservation area must be set back a minimum of 150 feet from the Miromar Lakes southern boundary. This condition does not apply to residential accessory uses and structures, and it does not apply to accessory recreational uses for single-family or two-family attached dwellings, such as an individual swimming pool. The 150-foot setback will not apply if an intervening building is constructed between the Miromar Lakes southern boundary and the active outdoor recreational use so as to mitigate noise and light impacts on residential properties to the south of Estero Parkway Extension. The determination that the setback is not applicable will occur as part of the FPA process.
 - 35. A Type "D" buffer with 4-foot berm will be provided along the Miromar Lakes southern boundary, east of Ben Hill Griffin Parkway, where "R-2" parcels abut the Estero Parkway Extension. No buffer is required where conservation areas abut the Miromar Lakes southern boundary.
 - 36. Access to the future Estero Parkway Extension east of Ben Hill Griffin Parkway is limited to the three (3) locations shown on the MCP. The three (3) locations on the MCP generally align with existing golf course holes and the north/south portion of Markward Crossing that is directly east of Seagrove Street within the Grandezza community.

SECTION C. DEVIATIONS:

- 1. Deviation (1) seeks relief from the LDC §34-1954(d)(1) requirement that restricts model homes to a time limitation of 3 years, to allow model homes within the Miromar Lakes development to be permitted until the build out of the project. This deviation was APPROVED per Z-12-004 for the entire project.

2. Deviation (2) seeks relief from the LDC §34-1954(d)(2) requirement that restricts model units within a townhouse or multiple-family building not to extend beyond the initial sale period for that phase, to allow the model units until project build out. This deviation was APPROVED per Z-12-004 for the entire project.
3. Deviation (3) seeks relief from the LDC §§ 34-1263(e) and 34-1264(b) requirement that prohibit a package store or other establishment primarily engaged in the sale of alcoholic beverages for consumption on or off the premises from locating within 500 feet of any school (noncommercial) or dwelling unit; to allow a bar, cocktail lounge, or package store, to be less than 500 feet from Florida Gulf Coast University and internal dwelling units within the C-1 parcel located on the west side of Ben Hill Griffin Parkway, as depicted on the MCP. This deviation is APPROVED SUBJECT TO the following conditions:
 - a. Any establishment primarily engaged in the sale of alcoholic beverages for consumption on or off the premises must be located a minimum of 500 feet from any residential unit located outside of the C-1 parcel located on the west side of Ben Hill Griffin Parkway.
 - b. The MPD is limited to one (1) establishment primarily engaged in the sale of alcoholic beverages, specifically a bar, cocktail lounge, or package store. The establishment must be located as depicted on the Master Concept Plan, either within the C-1 tract located on the west side of Ben Hill Griffin Parkway as described in Deviation 3, OR within a C-1 tract located south of Florida Gulf Coast University, east of Ben Hill Griffin Parkway, and west of the conservation area, as described in Deviation 30.
4. Deviation (4) was WITHDRAWN.
5. Deviation (5) seeks relief from the LDC §10-291(3) (Required Street Access), requirement to provide, where practical, two (2) or more means of ingress and egress to residential developments of at least 5 acres in size, to allow only one means of ingress and egress for those development parcels that are surrounded by golf course, water body, or conservation areas or any combination of thereof. This deviation is APPROVED SUBJECT TO the condition that the developer must install a full-sized cul-de-sac at the dead end, and the Emergency Service District approves, in writing, the ingress and egress of each development parcel in conjunction with the application for final plan approval.
6. Deviation (6) seeks relief from the LDC §10-296(b), Table 3, requirement to provide a right-of-way width of 40 feet for two-way closed drainage, rear lot drainage or inverted crown, to allow a 35-foot right-of-way width to coincide with the back of the curb for local private roads. This deviation is APPROVED SUBJECT TO the condition that required drainage and utility easements are located outside of the right-of-way and the developer makes adequate provisions for road drainage and utilities.
7. Deviation (7) seeks relief from the LDC §10-296 ("Street Design and Construction Standards"), requirement to provide that wearing surfaces for local and access roads for Class A development must be 1.5-inch asphaltic concrete of Florida Department of Transportation Type S-1, to allow for cement concrete or decorative pavers within private local roadways within Miromar Lakes. This deviation is APPROVED SUBJECT TO the condition that the structural number of the proposed alternate cross-section will equal or exceed the structural number of a "standard" Class A local road flexible pavement cross-section.

8. Deviation (8) was WITHDRAWN.
9. Deviation (9) seeks relief from the LDC §10-296(r)(4)(a), requirement that allows privately maintained access ways that meet criteria as outlined in item 4(a) to be exempt from minimum right-of-way widths as specified in LDC §10-296(b), to permit access ways providing access up to 100 residential units to be exempt from the minimum roadway widths as specified in LDC §10-296(b). This deviation is APPROVED SUBJECT TO the following conditions:
 - a. The design and posted speed will be 20 mph or less;
 - b. This deviation will apply to private access ways only; and
 - c. Where determined to be practical by the design engineer, the developer will provide traffic calming devices identified in the ITE Residential Street Design and Traffic Control book.
10. Deviation (10) seeks relief from the LDC §10-329(d)(1)3, requirement to provide a minimum 50-foot setback from a water retention or detention excavation to private property lines under separate ownership, to allow a zero-foot setback limited to the property line contiguous to Miromar Lakes and Alico, Inc. in the north mining lake. This deviation is APPROVED.
11. Deviation (11) seeks relief from the LDC §10-329(d)(1) a.2, requirement to provide a minimum 50-foot setback from a water retention or detention excavation to existing or proposed rights-of-way or easements for an arterial or collector streets, to permit a 25-foot setback, subject to the developer providing elements for the protection of wayward vehicles in accordance with LDC §10-329(d)(1)a.2, as well as a Type "F" curb at the locations. This deviation is APPROVED.
12. Deviation (12) was WITHDRAWN.
13. Deviation (13) seeks relief from the LDC §10-355, requirement to provide a 10-foot public utility easement on both sides of a roadway, to allow the public utility easement on one side only provided the applicable utility companies agree to the elimination of the easement in writing . This deviation is APPROVED.
14. Deviation (14) seeks relief from the LDC §10-415(a), requirement to provide open space be calculated as a percentage of development area, to require open space based on the area of development excluding that portion of the development consisting of the existing mining lakes. This deviation is APPROVED SUBJECT TO the condition that the entire acreage of the existing mining lakes located on the east side of Ben Hill Griffin Parkway is exempt from open space requirements. These lakes may not be used to satisfy open space requirements on the site
15. Deviation (15) seeks relief from the LDC §10-416(d)(l) and 10-421(a)(5), requirement to provide that no portion of a buffer area consisting of trees and shrubs be located in an easement, to allow planted buffers in easements, provided that, if any required buffer or landscape strip plantings installed within easements must be removed, then the property owner's association or Uniform Community Development District (UCDD) must replace the plantings with like size and species at no expense to Lee County. The requirement must be clearly stated in each property owner's documents. This deviation is APPROVED

IN PART, SUBJECT TO it being limited to those portions of the project that received final plan approval and local development orders prior to November 13, 2001. The deviation was DENIED for the 534-acre addition to the property.

16. Deviation (16) seeks relief from the LDC §10-415(b), requirement to provide 50 percent of the required open space to incorporate existing indigenous vegetation, to allow all of the required indigenous vegetation to be provided in the conservation areas shown on the MCP and to permit all of the restored vegetation within the wetland slough to count toward the indigenous vegetation requirement. This deviation was APPROVED by Resolution Z-99-029 for the original +1,300-acre project with the condition that existing indigenous preservation requirements be met within the Conservation Area shown on the MCP last revised August 16, 1999 and that the developer must provide and preserve a minimum of 186 acres of existing indigenous and restored/enhanced plant communities within the +1,300 acre site. This deviation was also approved by Resolution Z-02-072 for the 534-acre addition to the project, subject to the following condition:

In conjunction with an application for local development order approval, the developer must submit a detailed invasive exotic removal and replanting plan for the Division of Environmental Sciences' Staff review and approval. The developer must delineate on the local development order plans a minimum of 158.7 acres of existing indigenous restored/enhanced plant communities within the +534-acre site addition.

17. Deviation (17) seeks relief from the LDC §§ 10-416(d)(1) and 10-421(a)(5), requirement that prohibit the planting of trees and shrubs within any right-of-way, to allow these plantings within the right-of-way. This deviation was APPROVED, IN PART, SUBJECT TO it being limited to only for those portions of the Miromar Lakes project that received final plan approval and local development orders prior to November 13, 2001, but is limited to private local roads, provided the plantings are in compliance with the LDC §34-3131 (visibility), and are properly maintained by the developer or property owner's association. This deviation was DENIED for the 534-acre addition to the project.
18. Deviation (18) seeks relief from the LDC §10-418(a)(2)b, requirement to provide a minimum number of native wetland herbaceous plants per linear foot of lake shoreline; to allow required plants in compliance with the Lake Management Plan and Lake Shoreline Planting Plan attached as Exhibit J provided that herbaceous plant requirements per LDC §10-418 are calculated on the entire length of the lake shoreline, including bulkhead portions. The developer may substitute wetland trees and shrubs for up to 50 percent of the total number of herbaceous plants required, at a ratio of 1 tree or 2 shrubs for 10 herbaceous plants. This deviation is APPROVED.
19. Deviation (19) was WITHDRAWN.
20. Deviation (20) seeks relief from the LDC §34-2194(c)(1)(a), requirement to provide that the Board of County Commissioners may grant less stringent setbacks from bodies of water when the development surrounding the entire body of water is under unified control, to allow the development of buildings and accessory structures within zero feet of the mining lake adjacent to "R" tracts (south of Alico Road) when the development surrounding the entire body of water will not be under the unified control of Miromar. This deviation is APPROVED SUBJECT TO the following conditions:

- a. Limited to 5,527 linear feet of lake frontage within the areas delineated on the MCP.

- b. A compensatory littoral zone must be provided as pocket marshes instead of a 5-foot wide linear littoral shelf, per §10-418(3)(a). The compensatory pocket marsh must be a minimum 0.50 acres of marsh planted with a minimum of our native wetland plants and providing a 50 percent coverage at time of planting (herbaceous plants must be a minimum 2-inch linear; shrubs and grasses must be a minimum 1-gallon container size; trees must be a minimum 3-gallon size). The compensatory pocket marsh area must be provided along the shoreline of "R" tracts.
 - c. The total amount of linear feet of lake frontage that utilizes the zero-foot setback, plus any rip-rap installed for shoreline erosion control cannot exceed 20 percent or 11,054 linear feet of shoreline.
 - d. The details of applying this deviation must be submitted for review and approval through an Administrative Amendment that includes a compilation of where Deviation 20 has been utilized and where it is proposed to be utilized; a compilation of where rip-rap has been permitted for shoreline stabilization; the location of the compensatory littoral zone pocket marsh; and a planting plan with cross-sections for the compensatory littoral zone pocket marsh.
 - e. The pocket marsh must be constructed prior to the issuance of a Certificate of Compliance for any development order utilizing Deviation 20 beyond the 1,600 linear feet of the already permitted zero building setback associated with the Ravenna development (DOS2005-00296).
21. Deviation (21) was WITHDRAWN.
22. Deviation (22) seeks relief from the LDC §10-285, requirement to provide a minimum of 125-foot separation between driveway access points to a local road, to allow two connections for each short cul-de-sac (eyebrows) at a spacing less than 125 feet. This deviation is APPROVED SUBJECT TO the following conditions:
- a. each "eyebrow" must be provided with signage indicating one-way traffic in a counterclockwise direction; and
 - b. the minimum separation will be 60 feet; and
 - c. it applies only to private local roads; and
 - d. it is approved only for those typical situations including, but not limited to, those designated in the graphic submitted for this deviation.
23. Deviation (23) was WITHDRAWN.
24. Deviation (24) seeks relief from the LDC §10-416(d)(3), requirement to provide commercial developments adjoining existing residential development to provide a buffer including a fence or wall between the uses, to allow commercial developments to provide alternative means of separation that may include no buffers, fencing or walls. This deviation is APPROVED to allow alternative means of separation, while protecting internal project compatibility in accordance with Lee Plan Policy 18.1.7. in the following areas:
- a. Between residential and non-residential uses internal to the C-1, C-S and MU tracts, so as to create a "town center" design.

- b. Between the Miromar Lakes Sales Center and the abutting Miromar Lakes "R" tracts.
 - c. Between the "C-1" areas and the abutting "R" tracts.
 - d. Between the "C-1", "C-S" and "MU" areas and the abutting "R-2" tracts south and east of FGCU to allow pedestrian access and encourage walkability.
- 24A. Deviation seeks relief from the LDC §10-416(d)(3), requirement to provide multiple-family and commercial developments adjoining a right-of-way must provide a Type D buffer, to require no buffer for a small commercial parcel and a small residential parcel abutting FGCU's northerly access road. This deviation was APPROVED.
- 24B. Deviation seeks relief from the LDC §10-416(d)(3), requirement to provide multiple-family uses adjoining existing single-family uses must provide a buffer including a fence or wall between the uses, to allow alternative means of separating internal residential uses including no buffers, fencing or walls. This deviation is APPROVED SUBJECT TO the clarification that the implementation of this deviation must be consistent with Lee Plan Policy 18.1.7.
25. Deviation (25) was WITHDRAWN.
26. Deviation (26) was WITHDRAWN.
27. Deviation (27) was WITHDRAWN.
28. Deviation (28) seeks relief from the LDC §34-935(f)(3)(e), requirement to limit building heights in the University Community Future Land Use category to 45 feet above minimum flood elevation, to allow for a maximum building height of 65 feet within the MPD, except as described on Exhibit K. This deviation is APPROVED SUBJECT TO the following conditions:
- a. Buildings and structures exceeding 45 feet in height that are located in tracts east of Ben Hill Griffin Parkway and south of FGCU must be setback a minimum of 800 feet from the Miromar Lakes southern property line.
 - b. Buildings and structures exceeding 45 feet in height must be setback a minimum of 800 feet from the DR/GR Future Land Use category. This setback may be reduced administratively through the Final Plan Approval (FPA) process if one (1) of the following design standards is provided:
 - i. The DR/GR designated area adjacent to the area for which final plan approval is requested is an existing lake, the width of which measured at right angles from the DR/GR boundary is a minimum of 800 feet wide along the entire boundary with the DR/GR.
 - ii. The development area proposed for final plan approval must provide a minimum 100-foot-wide linear park, measured perpendicularly, along the DR/GR boundary with the proposed development area. To satisfy this requirement, the linear park must:

- (1) include a six-foot-wide boardwalk, sidewalk or similarly ADA accessible pedestrian way to provide recreational opportunities;
 - (2) include benches, native species and ecosystem interpretation facilities; and
 - iii. They must be planted in random fashion with the following native vegetation for every 5,000 square feet of upland area:
 - (1) a minimum of 10 trees (minimum 10-foot canopy trees with four-inch caliper; palms may be substituted for 50 percent of the trees on a three palms per one tree (3:1) ratio;
 - (2) a minimum of thirty 48 inch shrubs; and
 - (3) a minimum of seventy 24 inch: three-gallon container size shrubs. The above must contain a minimum of 3 tree species and 3 shrub species.
 - iv. A waterway interconnection may be included within the linear park, but a minimum 50-foot-wide continuous or ADA-accessible, interconnected upland area must be planted as prescribed in (3) above. The shoreline must be planted with one 7-gallon container native wetland tree no less than 6 feet in height at a minimum quantity of one tree for every 10 linear feet of shoreline.
29. Deviation (29) was WITHDRAWN.
30. Deviation (30) seeks relief from the LDC §§ 34-1263(e) and 34-1264(b), requirement that prohibits a package store or other establishment primarily engaged in the sale of alcoholic beverages for consumption, on or off the premises from locating within 500 feet of any dwelling unit, to allow a bar, cocktail lounge, or package store to locate within 500 feet of dwelling units on a C-1 Tract located south of Florida Gulf Coast University, east of Ben Hill Griffin Parkway and west of the conservation area depicted on the Master Concept Plan. This deviation is APPROVED SUBJECT TO the following conditions:
- a. Any establishment primarily engaged in the sale of alcoholic beverages for consumption, on or off the premises, must be located a minimum of 500 feet from the Florida Gulf Coast University property line (except as permitted by Deviation 3) and a minimum of 500 feet from Grandezza residential units. Distances will be measured as set forth in LDC §34-1264(b). This deviation does not apply to consumption on premises in conjunction with uses outlined in LDC §34-1264(b)(2).
 - b. The MPD is limited to one (1) establishment primarily engaged in the sale of alcoholic beverages, specifically a bar, cocktail lounge, or package store. The establishment must be located as depicted on the Master Concept Plan, either within the C-1 tract located on the west side of Ben Hill Griffin Parkway as described in Deviation 3, OR within a C-1 tract located south of Florida Gulf Coast University, east of Ben Hill Griffin Parkway, and west of the conservation area, as described in Deviation 30.

SECTION D. EXHIBITS:

The following exhibits are attached to this resolution and incorporated by reference:

- Exhibit A: Legal description of the property
- Exhibit B: Zoning Map (with the subject parcel indicated)
- Exhibit C: The Master Concept Plan
- Exhibit D: Schedule of Uses and Property Development Regulations
- Exhibit E: Bona fide Agricultural Uses
- Exhibit F: Big Cypress Fox Squirrel Management Program
- Exhibit G: Miromar Lakes Snail Kite Management Plan
- Exhibit H: Miromar Lakes Open Space and Indigenous Preservation
- Exhibit I: Environmental Resource Permit (ERP) FLUCCS map
- Exhibit J: Lake Management Plan and Lake Shoreline Planting Plan
- Exhibit K: 45 FT Maximum Building Height
- Exhibit L: Eighth Amendment to Miromar Lakes DRI

SECTION E. FINDINGS AND CONCLUSIONS:

1. The amendments to the existing Development of Regional Impact and DRI Development Order do not constitute a substantial deviation and the changes do not negatively impact regional goals, resources, or facilities.
2. The Board of County Commissioners found the existing MPD to be consistent with the Lee Plan. The relevant Lee Plan issues raised by the proposed MPD changes concern the University Community Future Land Use category and the Lee Plan compatibility objectives and policies. The applicant has adequately demonstrated that the Request, as conditioned, is consistent with these relevant Lee Plan provisions. Consequently, the applicant has proven entitlement to the rezoning by demonstrating compliance with the applicable goals, objectives, and policies, as well as the densities, intensities and general uses, of the Lee Plan.
3. As conditioned in this Resolution, the Request is compatible with existing and planned uses in the surrounding area. Specifically:
 - a. The relocated commercial areas:
 - i. Are appropriately and adequately buffered;
 - ii. Have sufficient separation of uses and activities;
 - iii. Have sufficient mitigation of negative visual, security, and traffic impacts; and
 - iv. Are designed to result in less than nuisance, injurious, or offensive amounts of noise and light pollution;
 - b. The conditions provide sufficient mitigation of the potential noise, light, height, and intensity impacts from the addition of multiple-family dwelling units to the list of uses in the southeastern project;
 - c. There are no significant compatibility issues raised by the addition of the MU areas; and

- d. The changes to the existing R-2 areas are likely to improve compatibility over existing potential uses and activities.
4. As conditioned in this Resolution, the uses are appropriate at the proposed locations.
5. Urban services remain available and adequate to serve the proposed land uses.
6. As conditioned in this Resolution:
 - a. The Request complies with the applicable provisions of the LDC;
 - b. The changes proposed by the Request will not place an undue burden upon existing transportation or planned infrastructure facilities and the project will be served by streets with the capacity to carry traffic generated by the development; and
 - c. The changes proposed by the Request will not adversely affect environmentally critical areas and natural resources.
7. The recommended conditions provide sufficient safeguards to the public interest and reasonably relate to the impacts on the public's interest created by or expected from the proposed development.

Commissioner Hamman made a motion to adopt the foregoing resolution, seconded by Commissioner Manning. The vote was as follows:

John Manning	Aye
Cecil L Pendergrass	Absent
Larry Kiker	Aye
Brian Hamman	Aye
Frank Mann	Aye

DULY PASSED AND ADOPTED this 18th day of June, 2014.

ATTEST:
LINDA DOGGETT, CLERK

BY: Joyce Townsend
Deputy Clerk

BOARD OF COUNTY COMMISSIONERS
OF LEE COUNTY, FLORIDA

BY: Larry Kiker
Larry Kiker, Chair

APPROVED AS TO FORM FOR THE
RELiance OF LEE COUNTY ONLY



RECEIVED
MINUTES OFFICE

2014 JUL 18 AM 10:47

Michael D. Jacob
Managing Assistant County Attorney
County Attorney's Office



950 Encore Way • P.O. Box 111629 • Naples, Florida 34108 • Phone: 239.254.2000 • Fax: 239.254.2098

HM PROJECT #2000106X

7/25/2011

REF. DWG. #A-1583-1

PAGE 2 OF 2

LEGAL DESCRIPTION:

A PARCEL OF LAND LOCATED IN A PORTION OF SECTIONS 10, 11, 14, 15 AND 23, TOWNSHIP 46 SOUTH, RANGE 25 EAST, LEE COUNTY, FLORIDA, BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

COMMENCE AT SOUTHEAST CORNER OF SECTION 23, TOWNSHIP 46 SOUTH, RANGE 25 EAST, LEE COUNTY, FLORIDA; THENCE RUN N.89°44'39"W., ALONG THE SOUTH LINE OF SAID SECTION 23, FOR A DISTANCE OF 651.54 FEET TO A POINT ON THE WESTERLY RIGHT-OF-WAY LINE OF BEN HILL GRIFFIN PARKWAY (A.K.A. TREELINE DRIVE), A 150.00 FOOT WIDE RIGHT-OF-WAY, RECORDED IN O.R. BOOK 2745, PAGES 1550 THROUGH 1554 OF THE PUBLIC RECORDS OF LEE COUNTY, FLORIDA AND TO THE POINT OF BEGINNING OF THE PARCEL OF LAND HEREIN DESCRIBED; THENCE CONTINUE N.89°44'39"W. ALONG THE SOUTH LINE OF SAID SECTION 23, FOR A DISTANCE OF 2,921.79 FEET TO A POINT ON THE EASTERLY RIGHT-OF-WAY LINE OF INTERSTATE 75; THENCE RUN N.18°17'51"W. ALONG THE EASTERLY RIGHT-OF-WAY LINE OF INTERSTATE 75, FOR A DISTANCE OF 955.62 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE EASTERLY; THENCE RUN NORTHERLY ALONG THE EASTERLY RIGHT-OF-WAY LINE OF INTERSTATE 75 AND ALONG THE ARC OF SAID CURVE TO THE RIGHT, HAVING A RADIUS OF 17,026.80 FEET, THROUGH A CENTRAL ANGLE OF 04°04'42", SUBTENDED BY A CHORD OF 1,211.72 FEET AT A BEARING OF N.16°15'30"W., FOR A DISTANCE OF 1,211.97 FEET TO THE END OF SAID CURVE; THENCE RUN N.14°13'09"W. ALONG THE EASTERLY RIGHT-OF-WAY LINE OF INTERSTATE 75, FOR A DISTANCE OF 9,126.68 FEET; THENCE RUN N.76°08'54"E., FOR A DISTANCE OF 527.61 FEET; THENCE RUN N.79°14'37"E., FOR A DISTANCE OF 501.77 FEET; THENCE RUN N.84°36'26"E., FOR A DISTANCE OF 384.54 FEET; THENCE RUN S.85°27'53"E., FOR A DISTANCE OF 381.51 FEET; THENCE RUN S.74°31'06"E., FOR A DISTANCE OF 209.92 FEET TO A POINT ON THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY AND A POINT ON A CIRCULAR CURVE, CONCAVE EASTERLY, WHOSE RADIUS POINT BEARS S.69°47'11"E., A DISTANCE OF 3,075.00 FEET THEREFROM; THENCE RUN SOUTHERLY ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY AND ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 3,075.00 FEET, THROUGH A CENTRAL ANGLE OF 23°44'14", SUBTENDED BY A CHORD OF 1,264.85 FEET AT A BEARING OF S.08°20'42"W., FOR A DISTANCE OF 1,273.94 FEET TO THE END OF SAID CURVE; THENCE RUN S.03°31'24"E. ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY, FOR A DISTANCE OF 3,887.79 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE EASTERLY; THENCE RUN SOUTHERLY ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY AND ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 2,000.00 FEET, THROUGH A CENTRAL ANGLE OF 20°33'03", SUBTENDED BY A CHORD OF 713.52 FEET AT A BEARING OF S.13°47'56"E., FOR A DISTANCE OF 717.36 FEET TO THE END OF SAID CURVE; THENCE RUN S.24°04'27"E. ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY, FOR A DISTANCE OF 1,593.09 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE NORTHEASTERLY; THENCE RUN SOUTHEASTERLY ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY AND ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 2,875.00 FEET, THROUGH A CENTRAL ANGLE OF 31°16'49", SUBTENDED BY A CHORD OF 1,550.16 FEET AT A BEARING OF S.39°42'52"E., FOR A DISTANCE OF 1,569.58 FEET TO THE END OF SAID CURVE; THENCE RUN S.55°21'16"E. ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY, FOR A DISTANCE OF

EXHIBIT

A

H:\2000\2000106\WP\2000106x\MIR-WEST-1.doc

HM PROJECT #2000106X

7/25/2011

REF. DWG. #A-1583-1

PAGE 2 OF 2

1,684.71 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE SOUTHWESTERLY; THENCE RUN SOUTHEASTERLY ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY AND ALONG THE ARC OF SAID CURVE TO THE RIGHT, HAVING A RADIUS OF 1,325.00 FEET, THROUGH A CENTRAL ANGLE OF 54°31'33", SUBTENDED BY A CHORD OF 1,213.90 FEET AT A BEARING OF S.28°05'29"E., FOR A DISTANCE OF 1,260.94 FEET TO THE END OF SAID CURVE; THENCE RUN S.00°49'43"E. ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY, FOR A DISTANCE OF 600.19 FEET TO THE POINT OF BEGINNING; CONTAINING 396.652 ACRES, MORE OR LESS.

BEARINGS SHOWN HEREON REFER TO THE SOUTH LINE OF SECTION 23, TOWNSHIP 46 SOUTH, RANGE 25 EAST, OF LEE COUNTY, FLORIDA AS BEING N.89°44'39"W.

THIS SKETCH AND LEGAL HAS BEEN PREPARED BASED UPON THE BANKS ENGINEERING, INC. PARCEL DESCRIPTIONS AS SHOWN ON DRAWINGS 1155SR, SHEETS 1 THROUGH 4, DATED 4/10/2000

HOLE MONTES, INC.


CERTIFICATE OF AUTHORIZATION NUMBER LB 1772

BY

Thomas M. Murphy
THOMAS M. MURPHY


P.S.M. #5628

STATE OF FLORIDA



LINE	DIRECTION	DISTANCE
L1	N 78°08'54" E	557.61'
L2	N 79°43'27" E	502.27'
L3	N 81°20'29" E	284.54'
L4	S 85°27'53" E	381.81'
L5	S 74°31'05" E	208.92'
L6	S 00°48'43" E	800.15'

CURVE	RADIUS	LENGTH	CHORD	BEARING	DELTA
C1	1208.80'	170.87'	171.17'	N 18°18'30" W	08°24'42"
C2	2025.00'	1273.94'	1284.80'	S 08°20'45" W	37°44'34"
C3	2020.00'	717.36'	713.95'	S 12°47'58" E	32°33'32"
C4	8878.00'	1589.50'	1580.13'	S 38°42'58" E	31°14'49"
C5	1325.00'	1280.54'	1273.92'	S 28°09'24" E	54°31'32"

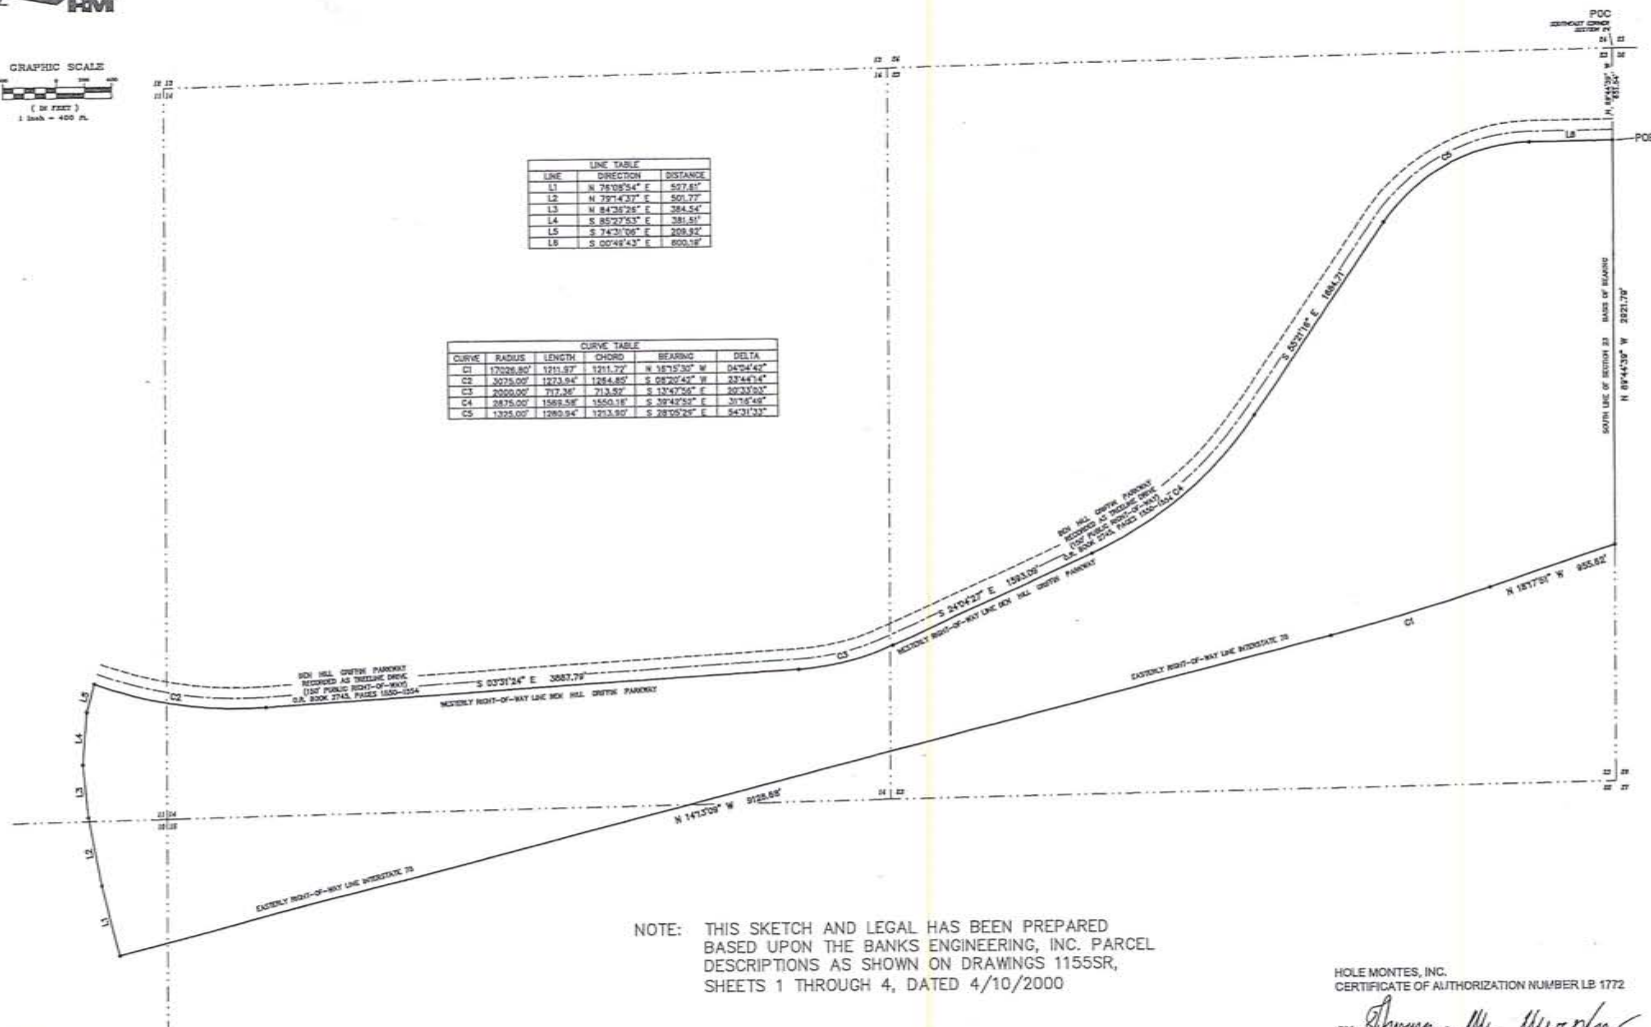

NOTE: THIS SKETCH AND LEGAL HAS BEEN PREPARED
BASED UPON THE BANKS ENGINEERING, INC. PARCEL
DESCRIPTIONS AS SHOWN ON DRAWINGS 1155SR,
SHEETS 1 THROUGH 4, DATED 4/10/2000

* NOT A SURVEY *

HOLE MONTES, INC.
CERTIFICATE OF AUTHORIZATION NUMBER LB 1772

BY *Thomas M. Murphy*
THOMAS M. MURPHY

P.S.M. #5628
STATE OF FLORIDA

LEGEND
POC POINT OF COMMENCEMENT
POB POINT OF BEGINNING

FIELD BOOK	REVISIONS	DATE

MIROMAR LAKES

NOT VALID WITHOUT THE SIGNATURE AND SEAL OF A FLORIDA LICENSED SURVEYOR AND MAPPER.	PARTY CHIEF:	DATE:
	TH	7/03
	THM	7/03
	N/A	1"=400'



550 Encore Way
Naples, FL 34110
Phone: (941) 254-2000
Florida Certificate of
Authorization No.1772

SKETCH TO ACCOMPANY A LEGAL DESCRIPTION

DRAWING NO.
A-1583-1
PROJECT NO.
DO-105X
NOTESHEET NO.
MIR-WEST-1

DCI 2013-00008



HM PROJECT #2000106X
6/26/2014
REF. DWG. #A-1582-2
Page 1 of 3

950 Encore Way • Naples, Florida 34110 • Phone 239.254.2000 • Fax: 239.254.2099

LEGAL DESCRIPTION:

A PARCEL OF LAND LOCATED IN A PORTION OF SECTIONS 11, 12, 13, 14, 23, AND 24, TOWNSHIP 46 SOUTH, RANGE 25 EAST, AND SECTION 18, TOWNSHIP 46 SOUTH, RANGE 26 EAST, LEE COUNTY, FLORIDA, BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

COMMENCE AT THE SOUTHEAST CORNER OF SECTION 24, TOWNSHIP 46 SOUTH, RANGE 25 EAST, LEE COUNTY, FLORIDA; THENCE RUN N.00°48'26"W. ALONG THE EAST LINE OF THE SOUTHEAST ONE-QUARTER OF SAID SECTION 24, FOR A DISTANCE OF 37.50 FEET TO THE POINT OF BEGINNING OF THE PARCEL OF LAND HEREIN DESCRIBED, THE SAME BEING A POINT 37.50 FEET AS MEASURED AT RIGHT ANGLES TO THE SOUTH LINE OF SAID SECTION 24; THENCE RUN S.89°28'32"W., PARALLEL WITH THE SOUTH LINE OF SAID SECTION 24, FOR A DISTANCE OF 4812.99 FEET, TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE NORTHERLY; THENCE RUN WESTERLY, ALONG THE ARC OF SAID CURVE TO THE RIGHT, HAVING A RADIUS OF 2800.92 FEET, THROUGH A CENTRAL ANGLE OF 07°47'42", SUBTENDED BY A CHORD OF 380.77 FEET AT A BEARING OF N.86°37'37"W., FOR A DISTANCE OF 381.06 FEET TO THE END OF SAID CURVE; THENCE RUN N.82°43'46"W., FOR A DISTANCE OF 275.20 FEET, TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE SOUTHERLY; THENCE RUN WESTERLY, ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 2950.00 FEET, THROUGH A CENTRAL ANGLE OF 05°34'48", SUBTENDED BY A CHORD OF 287.19 FEET AT A BEARING OF N.85°31'11"W., FOR A DISTANCE OF 287.30 FEET TO THE END OF SAID CURVE, THE SAME BEING A POINT ON THE EASTERLY RIGHT-OF-WAY LINE OF BEN HILL GRIFFIN PARKWAY (A.K.A. TREELINE DRIVE), A 150 FOOT WIDE RIGHT-OF-WAY, RECORDED IN O.R. BOOK 2745, PAGES 1550 THROUGH 1554 OF THE PUBLIC RECORDS OF LEE COUNTY, FLORIDA; THENCE RUN N.00°49'43"W. ALONG SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 484.10 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE SOUTHWESTERLY; THENCE RUN NORTHWESTERLY ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE AND ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 1,475.00 FEET, THROUGH A CENTRAL ANGLE OF 54°31'33", SUBTENDED BY A CHORD OF 1,351.32 FEET AT A BEARING OF N.28°05'29"W., FOR A DISTANCE OF 1,403.69 FEET TO THE END OF SAID CURVE; THENCE RUN N.55°21'16"W. ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 423.96 FEET; THENCE RUN N.38°37'17"E., FOR A DISTANCE OF 180.44 FEET; THENCE RUN N.40°45'20"W., FOR A DISTANCE OF 1,287.06 FEET; THENCE RUN N.51°22'43"W., FOR A DISTANCE OF 275.00 FEET; THENCE RUN N.20°50'23"W., FOR A DISTANCE OF 170.61 FEET; THENCE RUN N.03°26'59"W., FOR A DISTANCE OF 196.02 FEET; THENCE RUN N.49°19'44"E., FOR A DISTANCE OF 344.71 FEET; THENCE RUN S.54°09'13"E., FOR A DISTANCE OF 1,057.59 FEET; THENCE RUN S.05°08'14"W., FOR A DISTANCE OF 497.67 FEET; THENCE RUN S.87°48'55"E., FOR A DISTANCE OF 1,464.61 FEET; THENCE RUN N.88°17'13"E., FOR A DISTANCE OF 233.73 FEET; THENCE RUN S.31°47'37"E., FOR A DISTANCE OF 631.21 FEET; THENCE RUN N.62°11'53"E., FOR A DISTANCE OF 2,704.05 FEET; THENCE RUN N.21°20'50"E., FOR A DISTANCE OF 1,025.79 FEET; THENCE RUN N.02°13'31"W., FOR A DISTANCE OF 339.05 FEET; THENCE RUN N.73°40'08"E., FOR A DISTANCE OF 497.73 FEET; THENCE RUN N.84°27'10"E., FOR A DISTANCE OF 648.96 FEET; THENCE RUN N.20°19'20"W., FOR A DISTANCE OF 155.37 FEET; THENCE RUN N.04°47'10"W., FOR A DISTANCE OF 137.24 FEET; THENCE RUN N.10°20'25"E., FOR A DISTANCE OF 89.58 FEET; THENCE RUN N.88°40'48"W., FOR A DISTANCE OF 108.51 FEET; THENCE RUN N.35°22'24"E., FOR A DISTANCE OF 61.49 FEET; THENCE RUN N.24°10'35"E., FOR A DISTANCE OF 16.58 FEET; THENCE RUN N.16°58'33"E., FOR A DISTANCE OF 22.30 FEET; THENCE RUN N.01°25'10"W., FOR A DISTANCE OF 17.20 FEET; THENCE RUN N.02°00'52"E., FOR A DISTANCE OF 22.73 FEET; THENCE RUN N.10°34'22"E., FOR A DISTANCE OF 27.69 FEET; THENCE RUN N.08°31'29"E., FOR A DISTANCE OF 27.56 FEET; THENCE RUN N.04°17'29"W., FOR A DISTANCE OF 27.54 FEET; THENCE RUN N.03°50'00"E., FOR A DISTANCE OF 32.88 FEET; THENCE RUN



HM PROJECT #2000106X
6/26/2014
REF. DWG. #A-1582-2
Page 2 of 3

950 Encore Way • Naples, Florida 34110 • Phone 239.254.2000 • Fax: 239.254.2099

N.05°16'54"E., FOR A DISTANCE OF 34.74 FEET; THENCE RUN N.14°36'53"W., FOR A DISTANCE OF 12.71 FEET; THENCE RUN N.49°59'45"W., FOR A DISTANCE OF 15.95 FEET; THENCE RUN N.67°08'11"W., FOR A DISTANCE OF 67.75 FEET; THENCE RUN N.67°33'34"E., FOR A DISTANCE OF 68.16 FEET; THENCE RUN N.57°34'58"E., FOR A DISTANCE OF 15.64 FEET; THENCE RUN N.53°45'20"E., FOR A DISTANCE OF 13.61 FEET; THENCE RUN N.58°32'02"E., FOR A DISTANCE OF 11.22 FEET; THENCE RUN N.54°40'50"E., FOR A DISTANCE OF 13.85 FEET; THENCE RUN N.49°36'55"E., FOR A DISTANCE OF 19.09 FEET; THENCE RUN N.37°17'03"E., FOR A DISTANCE OF 14.40 FEET; THENCE RUN N.25°04'13"E., FOR A DISTANCE OF 22.74 FEET; THENCE RUN N.30°25'33"E., FOR A DISTANCE OF 40.77 FEET; THENCE RUN S.70°47'07"E., FOR A DISTANCE OF 50.50 FEET; THENCE RUN N.19°32'42"E., FOR A DISTANCE OF 63.26 FEET; THENCE RUN N.62°41'55"E., FOR A DISTANCE OF 33.33 FEET; THENCE RUN N.60°03'38"E., FOR A DISTANCE OF 27.79 FEET; THENCE RUN N.68°56'32"E., FOR A DISTANCE OF 33.67 FEET; THENCE RUN N.69°27'09"E., FOR A DISTANCE OF 39.32 FEET; THENCE RUN N.76°09'54"E., FOR A DISTANCE OF 38.69 FEET; THENCE RUN N.84°37'56"E., FOR A DISTANCE OF 35.30 FEET; THENCE RUN N.71°01'39"E., FOR A DISTANCE OF 36.05 FEET; THENCE RUN N.56°16'09"E., FOR A DISTANCE OF 22.32 FEET; THENCE RUN N.54°45'23"E., FOR A DISTANCE OF 72.52 FEET; THENCE RUN N.43°40'48"E., FOR A DISTANCE OF 14.33 FEET; THENCE RUN N.36°37'28"E., FOR A DISTANCE OF 31.97 FEET; THENCE RUN N.16°15'53"E., FOR A DISTANCE OF 27.07 FEET; THENCE RUN N.00°14'32"W., FOR A DISTANCE OF 18.58 FEET; THENCE RUN N.01°01'18"W., FOR A DISTANCE OF 22.80 FEET; THENCE RUN N.11°30'29"E., FOR A DISTANCE OF 41.66 FEET; THENCE RUN N.25°25'32"E., FOR A DISTANCE OF 18.52 FEET; THENCE RUN N.29°13'14"E., FOR A DISTANCE OF 12.77 FEET; THENCE RUN N.09°42'26"E., FOR A DISTANCE OF 13.86 FEET; THENCE RUN N.10°10'17"W., FOR A DISTANCE OF 8.24 FEET; THENCE RUN N.25°29'33"W., FOR A DISTANCE OF 11.70 FEET; THENCE RUN N.71°45'42"W., FOR A DISTANCE OF 21.85 FEET; THENCE RUN N.59°03'27"W., FOR A DISTANCE OF 13.21 FEET; THENCE RUN N.37°04'03"W., FOR A DISTANCE OF 27.24 FEET; THENCE RUN N.00°38'43"W., FOR A DISTANCE OF 28.85 FEET; THENCE RUN N.10°12'59"E., FOR A DISTANCE OF 35.02 FEET; THENCE RUN N.01°52'01"E., FOR A DISTANCE OF 31.20 FEET; THENCE RUN N.05°34'22"E., FOR A DISTANCE OF 13.39 FEET; THENCE RUN N.01°01'36"W., FOR A DISTANCE OF 30.61 FEET; THENCE RUN N.15°40'00"W., FOR A DISTANCE OF 27.26 FEET; THENCE RUN N.22°54'25"W., FOR A DISTANCE OF 20.46 FEET; THENCE RUN N.20°19'15"W., FOR A DISTANCE OF 21.36 FEET; THENCE RUN N.17°17'45"W., FOR A DISTANCE OF 18.27 FEET; THENCE RUN N.25°34'23"W., FOR A DISTANCE OF 16.79 FEET; THENCE RUN N.15°41'23"W., FOR A DISTANCE OF 49.27 FEET; THENCE RUN N.00°29'10"W., FOR A DISTANCE OF 19.63 FEET; THENCE RUN S.65°22'51"W., FOR A DISTANCE OF 893.03 FEET; THENCE RUN S.62°02'33"W., FOR A DISTANCE OF 548.61 FEET; THENCE RUN N.84°00'27"W., FOR A DISTANCE OF 113.75 FEET; THENCE RUN S.73°01'40"W., FOR A DISTANCE OF 332.94 FEET; THENCE RUN S.88°47'09"W., FOR A DISTANCE OF 386.35 FEET; THENCE RUN N.01°12'51"W., FOR A DISTANCE OF 733.65 FEET; THENCE RUN N.75°24'23"E., FOR A DISTANCE OF 644.66 FEET; THENCE RUN N.02°55'16"W., FOR A DISTANCE OF 211.27 FEET; THENCE RUN N.19°49'36"E., FOR A DISTANCE OF 1,336.10 FEET; THENCE RUN S.88°44'00"W., FOR A DISTANCE OF 3,706.01 FEET; THENCE RUN N.00°58'18"W., FOR A DISTANCE OF 320.16 FEET; THENCE RUN S.89°01'42"W., FOR A DISTANCE OF 450.42 FEET; THENCE RUN S.03°10'23"E., FOR A DISTANCE OF 430.66 FEET; THENCE RUN S.88°17'12"W., FOR A DISTANCE OF 1,027.71 FEET; THENCE RUN S.01°42'48"E., FOR A DISTANCE OF 306.15 FEET; THENCE RUN S.47°45'12"W., FOR A DISTANCE OF 1,504.06 FEET; THENCE RUN S.88°27'56"W., FOR A DISTANCE OF 1,780.04 FEET TO A POINT ON THE SAID EASTERLY RIGHT-OF-WAY LINE; THENCE RUN N.03°31'24"W. ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 3,304.77 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE EASTERLY; THENCE RUN NORTHERLY ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE AND ALONG THE ARC OF SAID CURVE TO THE RIGHT, HAVING A RADIUS OF 2,925.00 FEET, THROUGH A CENTRAL ANGLE OF 23°44'13", SUBTENDED BY A CHORD OF 1,203.14 FEET AT A BEARING OF N.08°20'42"E., FOR A DISTANCE OF 1,211.79 FEET TO THE END OF SAID CURVE; THENCE RUN



HM PROJECT #2000106X
6/26/2014
REF. DWG. #A-1582-2
Page 3 of 3

950 Encore Way • Naples, Florida 34110 • Phone 239.254.2000 • Fax: 239.254.2099

N.20°12'49"E. ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 473.55 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE WESTERLY; THENCE RUN NORTHERLY ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE AND ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 10,075.00 FEET, THROUGH A CENTRAL ANGLE OF 19°11'28", SUBTENDED BY A CHORD OF 3,358.85 FEET AT A BEARING OF N.10°37'06"E., FOR A DISTANCE OF 3,374.60 FEET TO THE END OF SAID CURVE; THENCE RUN N.01°01'21"E. ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 909.75 FEET; THENCE RUN S.89°42'24"E., FOR A DISTANCE OF 1,049.81 FEET; THENCE RUN S.01°00'21"E., FOR A DISTANCE OF 847.76 FEET; THENCE RUN S.04°19'45"W., FOR A DISTANCE OF 1,091.78 FEET; THENCE RUN S.00°39'26"E., FOR A DISTANCE OF 1,432.24 FEET; THENCE RUN S.00°16'17"E., FOR A DISTANCE OF 606.52 FEET; THENCE RUN N.88°47'46"E., FOR A DISTANCE OF 376.79 FEET; THENCE RUN S.40°48'12"E., FOR A DISTANCE OF 322.81 FEET; THENCE RUN S.19°01'17"E., FOR A DISTANCE OF 249.77 FEET; THENCE RUN S.88°53'28"E., FOR A DISTANCE OF 216.94 FEET; THENCE RUN S.24°26'51"E., FOR A DISTANCE OF 150.17 FEET; THENCE RUN S.77°09'26"E., FOR A DISTANCE OF 573.01 FEET; THENCE RUN S.88°10'13"E., FOR A DISTANCE OF 1,363.08 FEET; THENCE RUN S.19°42'28"E., FOR A DISTANCE OF 157.73 FEET; THENCE RUN S.87°09'14"E., FOR A DISTANCE OF 469.81 FEET; THENCE RUN N.88°02'24"E., FOR A DISTANCE OF 612.22 FEET; THENCE RUN S.21°30'12"E., FOR A DISTANCE OF 81.17 FEET; THENCE RUN N.88°10'32"E., FOR A DISTANCE OF 846.89 FEET; THENCE RUN N.88°10'32"E., FOR A DISTANCE OF 1,137.62 FEET; THENCE RUN S.20°09'57"E., FOR A DISTANCE OF 344.08 FEET; THENCE RUN S.89°48'06"E., FOR A DISTANCE OF 80.00 FEET; THENCE RUN S.20°09'57"E., FOR A DISTANCE OF 807.57 FEET; THENCE RUN S.15°43'44"E., FOR A DISTANCE OF 978.45 FEET; THENCE RUN S.89°46'43"E., FOR A DISTANCE OF 516.03 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE SOUTHWESTERLY; THENCE RUN SOUTHEASTERLY ALONG THE ARC OF SAID CURVE TO THE RIGHT, HAVING A RADIUS OF 500.00 FEET, THROUGH A CENTRAL ANGLE OF 88°55'56", SUBTENDED BY A CHORD OF 700.49 FEET AT A BEARING OF S.45°18'45"E., FOR A DISTANCE OF 776.08 FEET TO THE END OF SAID CURVE; THENCE RUN S.00°50'47"E., FOR A DISTANCE OF 1,447.68 FEET; THENCE RUN S.09°57'20"W., FOR A DISTANCE OF 533.57 FEET TO A POINT ON THE EAST LINE OF SECTION 13, TOWNSHIP 46 SOUTH, RANGE 25 EAST; THENCE RUN S.00°50'47"E. ALONG THE EAST LINE OF SAID SECTION 13, FOR A DISTANCE OF 957.10 FEET TO THE NORTHEAST CORNER OF SECTION 24, TOWNSHIP 46 SOUTH, RANGE 25 EAST; THENCE RUN S.00°50'13"E. ALONG THE EAST LINE OF THE NORTHEAST ONE-QUARTER OF SAID SECTION 24, FOR A DISTANCE OF 2,639.78 FEET TO THE EAST QUARTER CORNER OF SAID SECTION 24; THENCE RUN S.00°48'26"E. ALONG THE EAST LINE OF THE SOUTHEAST ONE-QUARTER OF SAID SECTION 24, FOR A DISTANCE OF 2,606.47 FEET, TO THE POINT OF BEGINNING; CONTAINING 1,403.216 ACRES, MORE OR LESS.

BEARINGS SHOWN HEREON REFER TO THE EAST LINE OF THE SOUTHEAST ONE-QUARTER OF SECTION 24, TOWNSHIP 46 SOUTH, RANGE 25 EAST, LEE COUNTY, FLORIDA AS BEING S.00°48'26"E.

THIS SKETCH AND LEGAL HAS BEEN PREPARED BASED UPON THE BANKS ENGINEERING, INC. PARCEL DESCRIPTIONS AS SHOWN ON DRAWINGS 1155SR, SHEETS 1 THROUGH 4, DATED 4/10/2000 AND DRAWINGS 1418SR, SHEETS 1 AND 2, DATED 7/13/2000.


HOLE MONTES, INC.
CERTIFICATE OF AUTHORIZATION NUMBER LB 1772

BY

Thomas M. Murphy
THOMAS M. MURPHY


P.S.M. #5628
STATE OF FLORIDA

NOTE: THIS SKETCH AND LEGAL HAS BEEN PREPARED BASED UPON THE BANKS ENGINEERING, INC. PARCEL DESCRIPTIONS AS SHOWN ON DRAWINGS 1155SR, SHEETS 1 THROUGH 4, DATED 4/10/2000 AND DRAWINGS 1418SR, SHEETS 1 AND 2, DATED 7/13/2000 NOT PLOTTED TO SCALE ON SHEETS SMALLER THAN 24X36



LINE	DIRECTION	DISTANCE
L1	N 89°14'30" E	361.90'
L2	N 89°14'30" E	484.10'
L3	N 89°14'30" E	424.85'
L4	N 89°14'30" E	150.44'
L5	N 89°14'30" E	170.00'
L6	N 89°14'30" E	275.00'
L7	N 89°14'30" E	118.00'
L8	N 89°14'30" E	188.00'
L9	N 89°14'30" E	244.71'
L10	N 89°14'30" E	290.50'

CURVE	RADIUS	LENGTH	CHORD	BEARING	DELTA
C1	1475.00'	1403.62'	1701.32'	S 28°02'28" E	54°21'24"
C2	2905.00'	1211.79'	1503.14'	N 89°14'30" E	35°47'11"
C3	1000.00'	2474.82'	2706.80'	N 89°14'30" E	18°11'24"
C4	200.00'	774.66'	786.60'	N 89°14'30" E	30°28'54"
C5	2000.00'	381.09'	100.71'	N 89°14'30" E	5°12'43"
C6	2905.00'	281.50'	281.10'	N 89°14'30" E	5°34'48"

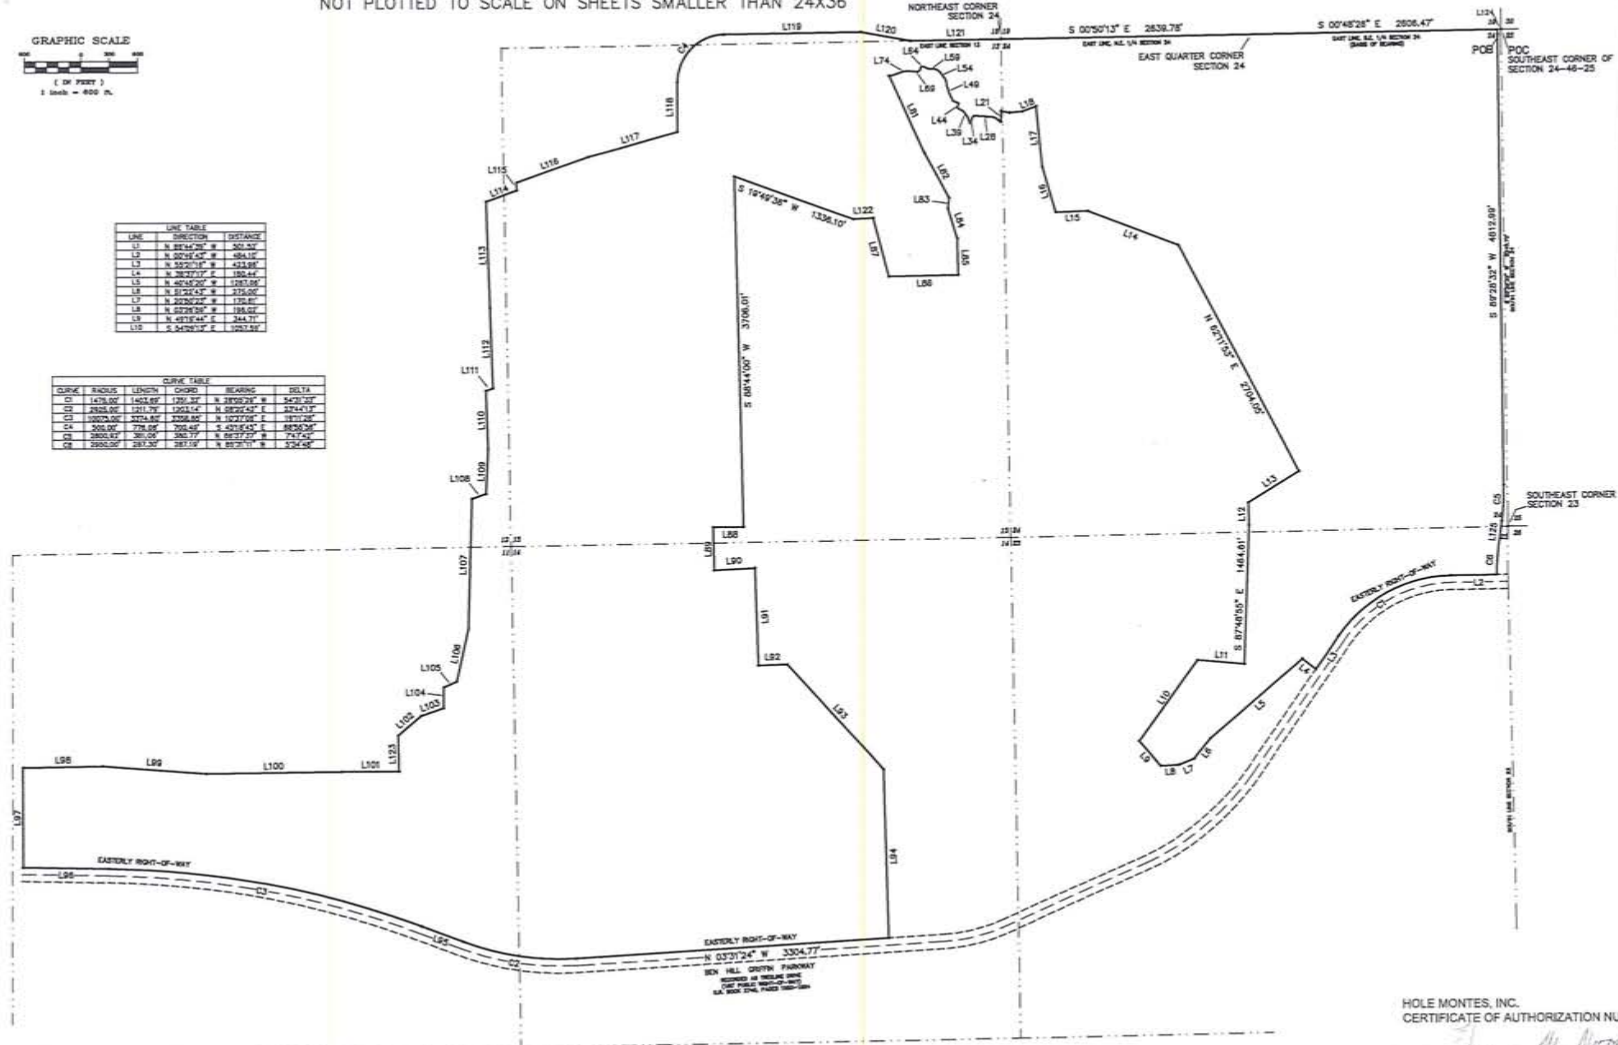

LINE	DIRECTION	DISTANCE
L1	N 89°14'30" E	361.90'
L2	N 89°14'30" E	484.10'
L3	N 89°14'30" E	424.85'
L4	N 89°14'30" E	150.44'
L5	N 89°14'30" E	170.00'
L6	N 89°14'30" E	275.00'
L7	N 89°14'30" E	118.00'
L8	N 89°14'30" E	188.00'
L9	N 89°14'30" E	244.71'
L10	N 89°14'30" E	290.50'
L11	N 89°14'30" E	361.90'
L12	N 89°14'30" E	484.10'
L13	N 89°14'30" E	424.85'
L14	N 89°14'30" E	150.44'
L15	N 89°14'30" E	170.00'
L16	N 89°14'30" E	275.00'
L17	N 89°14'30" E	118.00'
L18	N 89°14'30" E	188.00'
L19	N 89°14'30" E	244.71'
L20	N 89°14'30" E	290.50'
L21	N 89°14'30" E	361.90'
L22	N 89°14'30" E	484.10'
L23	N 89°14'30" E	424.85'
L24	N 89°14'30" E	150.44'
L25	N 89°14'30" E	170.00'
L26	N 89°14'30" E	275.00'
L27	N 89°14'30" E	118.00'
L28	N 89°14'30" E	188.00'
L29	N 89°14'30" E	244.71'
L30	N 89°14'30" E	290.50'
L31	N 89°14'30" E	361.90'
L32	N 89°14'30" E	484.10'
L33	N 89°14'30" E	424.85'
L34	N 89°14'30" E	150.44'
L35	N 89°14'30" E	170.00'
L36	N 89°14'30" E	275.00'
L37	N 89°14'30" E	118.00'
L38	N 89°14'30" E	188.00'
L39	N 89°14'30" E	244.71'
L40	N 89°14'30" E	290.50'
L41	N 89°14'30" E	361.90'
L42	N 89°14'30" E	484.10'
L43	N 89°14'30" E	424.85'
L44	N 89°14'30" E	150.44'
L45	N 89°14'30" E	170.00'
L46	N 89°14'30" E	275.00'
L47	N 89°14'30" E	118.00'
L48	N 89°14'30" E	188.00'
L49	N 89°14'30" E	244.71'
L50	N 89°14'30" E	290.50'
L51	N 89°14'30" E	361.90'
L52	N 89°14'30" E	484.10'
L53	N 89°14'30" E	424.85'
L54	N 89°14'30" E	150.44'
L55	N 89°14'30" E	170.00'
L56	N 89°14'30" E	275.00'
L57	N 89°14'30" E	118.00'
L58	N 89°14'30" E	188.00'
L59	N 89°14'30" E	244.71'
L60	N 89°14'30" E	290.50'
L61	N 89°14'30" E	361.90'
L62	N 89°14'30" E	484.10'
L63	N 89°14'30" E	424.85'
L64	N 89°14'30" E	150.44'
L65	N 89°14'30" E	170.00'
L66	N 89°14'30" E	275.00'
L67	N 89°14'30" E	118.00'
L68	N 89°14'30" E	188.00'
L69	N 89°14'30" E	244.71'
L70	N 89°14'30" E	290.50'
L71	N 89°14'30" E	361.90'
L72	N 89°14'30" E	484.10'
L73	N 89°14'30" E	424.85'
L74	N 89°14'30" E	150.44'
L75	N 89°14'30" E	170.00'
L76	N 89°14'30" E	275.00'
L77	N 89°14'30" E	118.00'
L78	N 89°14'30" E	188.00'
L79	N 89°14'30" E	244.71'
L80	N 89°14'30" E	290.50'
L81	N 89°14'30" E	361.90'
L82	N 89°14'30" E	484.10'
L83	N 89°14'30" E	424.85'
L84	N 89°14'30" E	150.44'
L85	N 89°14'30" E	170.00'
L86	N 89°14'30" E	275.00'
L87	N 89°14'30" E	118.00'
L88	N 89°14'30" E	188.00'
L89	N 89°14'30" E	244.71'
L90	N 89°14'30" E	290.50'
L91	N 89°14'30" E	361.90'
L92	N 89°14'30" E	484.10'
L93	N 89°14'30" E	424.85'
L94	N 89°14'30" E	150.44'
L95	N 89°14'30" E	170.00'
L96	N 89°14'30" E	275.00'
L97	N 89°14'30" E	118.00'
L98	N 89°14'30" E	188.00'
L99	N 89°14'30" E	244.71'
L100	N 89°14'30" E	290.50'
L101	N 89°14'30" E	361.90'
L102	N 89°14'30" E	484.10'
L103	N 89°14'30" E	424.85'
L104	N 89°14'30" E	150.44'
L105	N 89°14'30" E	170.00'
L106	N 89°14'30" E	275.00'
L107	N 89°14'30" E	118.00'
L108	N 89°14'30" E	188.00'
L109	N 89°14'30" E	244.71'
L110	N 89°14'30" E	290.50'
L111	N 89°14'30" E	361.90'
L112	N 89°14'30" E	484.10'
L113	N 89°14'30" E	424.85'
L114	N 89°14'30" E	150.44'
L115	N 89°14'30" E	170.00'
L116	N 89°14'30" E	275.00'
L117	N 89°14'30" E	118.00'
L118	N 89°14'30" E	188.00'
L119	N 89°14'30" E	244.71'
L120	N 89°14'30" E	290.50'
L121	N 89°14'30" E	361.90'
L122	N 89°14'30" E	484.10'
L123	N 89°14'30" E	424.85'
L124	N 89°14'30" E	150.44'
L125	N 89°14'30" E	170.00'

HOLE MONTES, INC.
CERTIFICATE OF AUTHORIZATION NUMBER LB 1772

BY *Thomas M. Murphy*
THOMAS M. MURPHY

P.S.M. #5628
STATE OF FLORIDA

* NOT A SURVEY *

FIELD BOOK	REVISIONS	DATE

MIROMAR LAKES

NOT VALID WITHOUT THE SIGNATURE AND ORIGINAL SEALED SEAL OF A FLORIDA LICENSED SURVEYOR AND MAPPER.	PARTY CHECK: DRAWN BY: TH/AT CHECKED BY: TMM VERTICAL SCALE: N/A	DATE: 5/14 5/14 HORIZONTAL SCALE: 1"=500'
---	---	--



990 Encore Way
Naples, FL 34110
Phone: (941) 254-2000
Florida Certificate of Authorization No. 1772

SKETCH TO ACCOMPANY A LEGAL DESCRIPTION



DRAWING NO. A-1582-2
PROJECT NO. 00.106X
INTERIOR NO. MIR-EAST-2

DRI2012-00021 &
DCI2013-00008

Zoning Map

6/18/2013

EXHIBIT 13

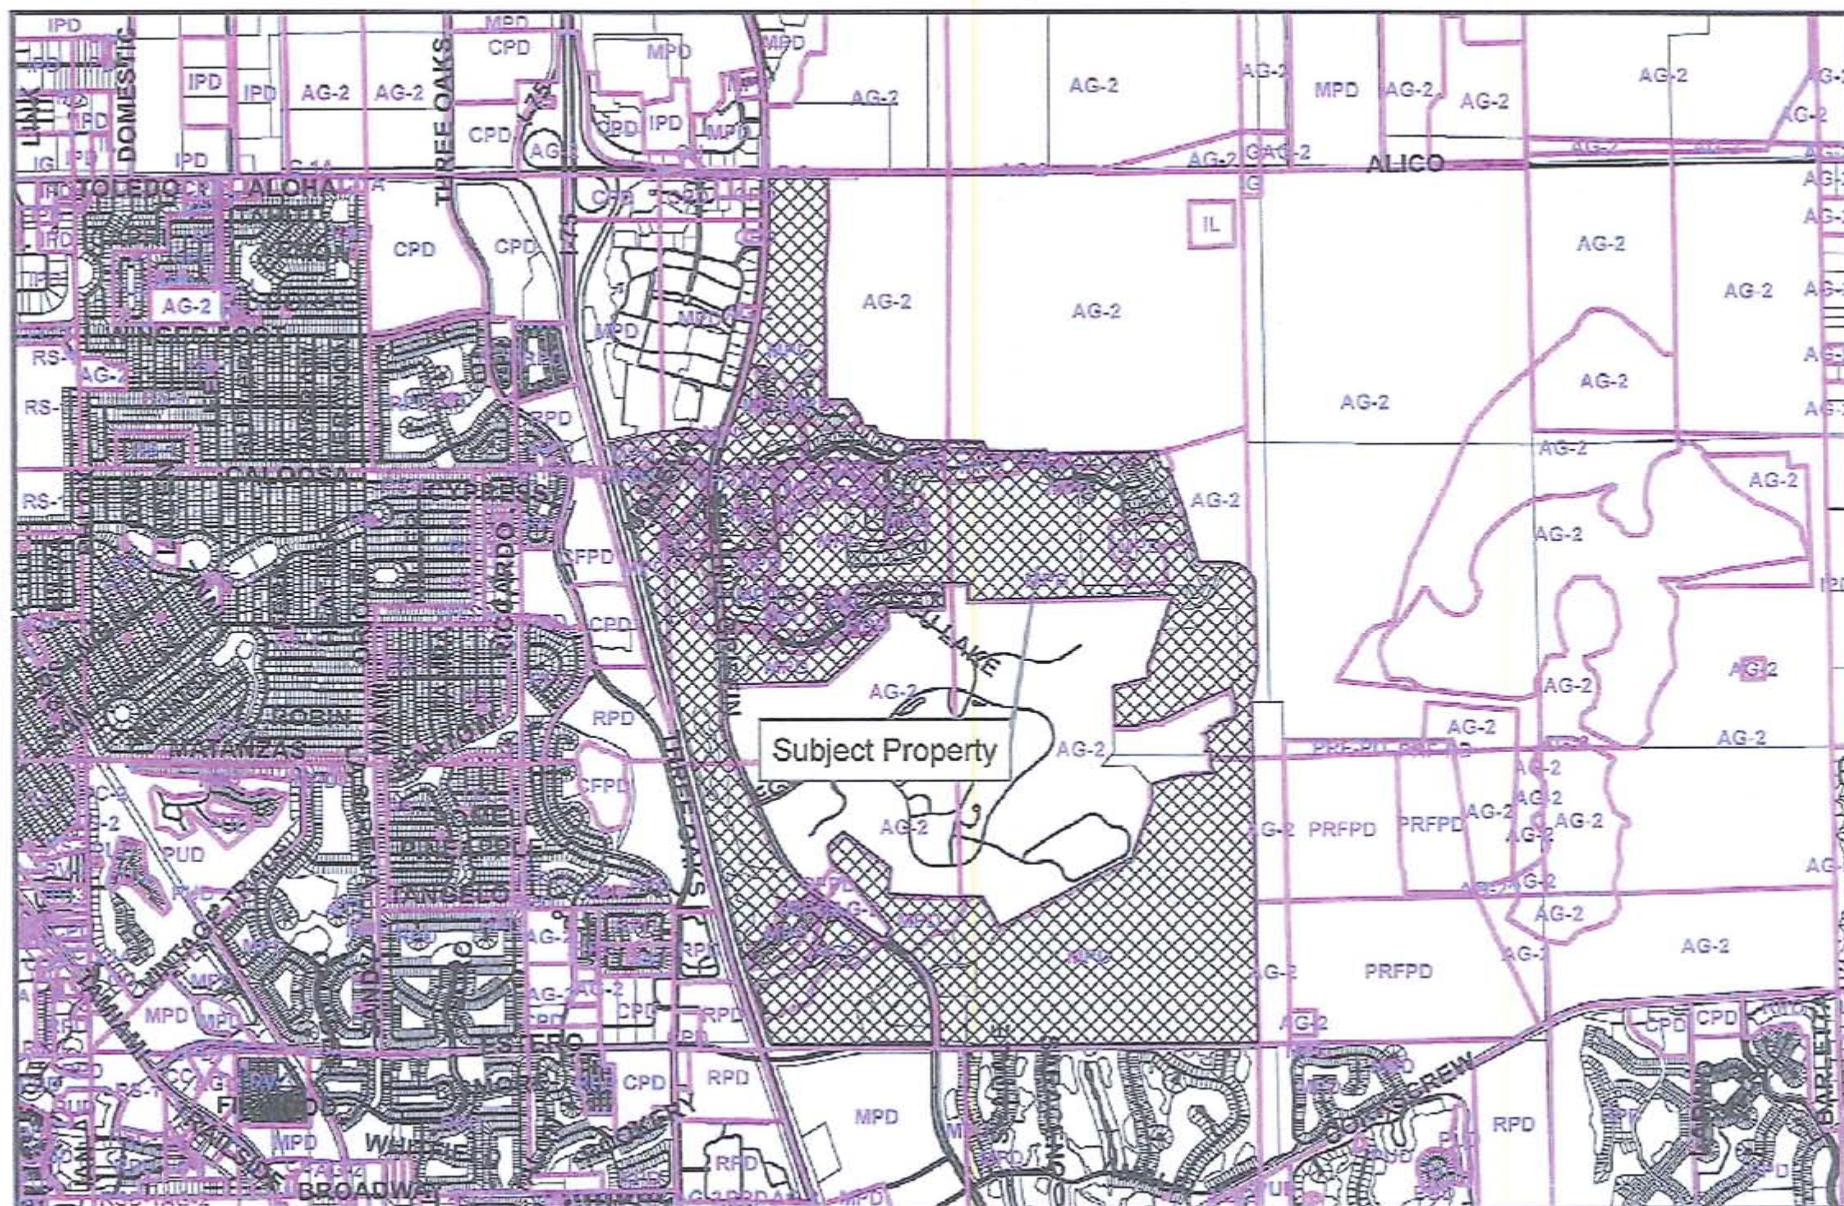

0.25 0.125 0 0.25 0.5
Miles

LEGEND

- C1 COMMERCIAL 1
- CS COMMERCIAL SOUTH
- MU MIXED USE
- R RESIDENTIAL
- GC GOLF COURSE
- R 2 RESIDENTIAL 2
- L CONCEPTUAL LAKE LOCATION
- CO CONSERVATION AREA
- ⊕ DEVIATION
- ✱ CONCEPTUAL CLUB LOCATIONS
- ✱ COP CONSUMPTION ON PREMISES
- CONCEPTUAL GOLF TRAIL OR BOARDWALK
- ↔ BHG PKWY ACCESS

LAND USE SUMMARY


DESCRIPTION	UNITS
RESIDENTIAL ("R", "R 2", "MU", "C1" AND "CS") (INCLUDES LAKES)	
SINGLE FAMILY UNITS	700 UNITS
MULTI-FAMILY UNITS	1,900 UNITS
TOTAL UNITS	2,600 UNITS
COMMERCIAL/OFFICE/HOTEL ("C1", "CS" AND "MU")	
RETAIL COMMERCIAL (GFA)	258,000 SQ FT
HOTEL ROOMS	450 ROOMS
OFFICE (GFA)	340,000 SQ FT
RESEARCH AND DEVELOPMENT (GFA)	40,000 SQ FT

LAND USE AREA SUMMARY

DESCRIPTION	ACRES
RESIDENTIAL ("R", "R 2", AND "GC")	963
COMMERCIAL/OFFICE/HOTEL ("C1" AND "CS")	84
MIXED USE ("MU")	109
LAKES/MISCELLANEOUS RECREATION/BUFFERS	305.3 ±
CONSERVATION AREAS "CO" (INCLUDES WETLAND BUFFERS)	344.7 ±
TOTAL ACRES	1,806

NOTES:

- NORTHERN CROSSING OF THE CONSERVATION AREA WILL BE REMOVED, CONTINGENT ON SUCCESSFUL PERMITTING OF THE SOUTHERN CROSSING.
- ACCESS POINTS TO THE FUTURE ESTERO PARKWAY EXTENSION EAST OF BEN HILL GRIFFIN PARKWAY ARE LIMITED TO THE THREE (3) LOCATIONS SHOWN ON THE MCP, AND WILL GENERALLY ALIGN WITH EXISTING GOLF COURSE HOLES AND MARKING CROSSING WITHIN THE GRADEZZA COMMUNITY TO THE SOUTH.

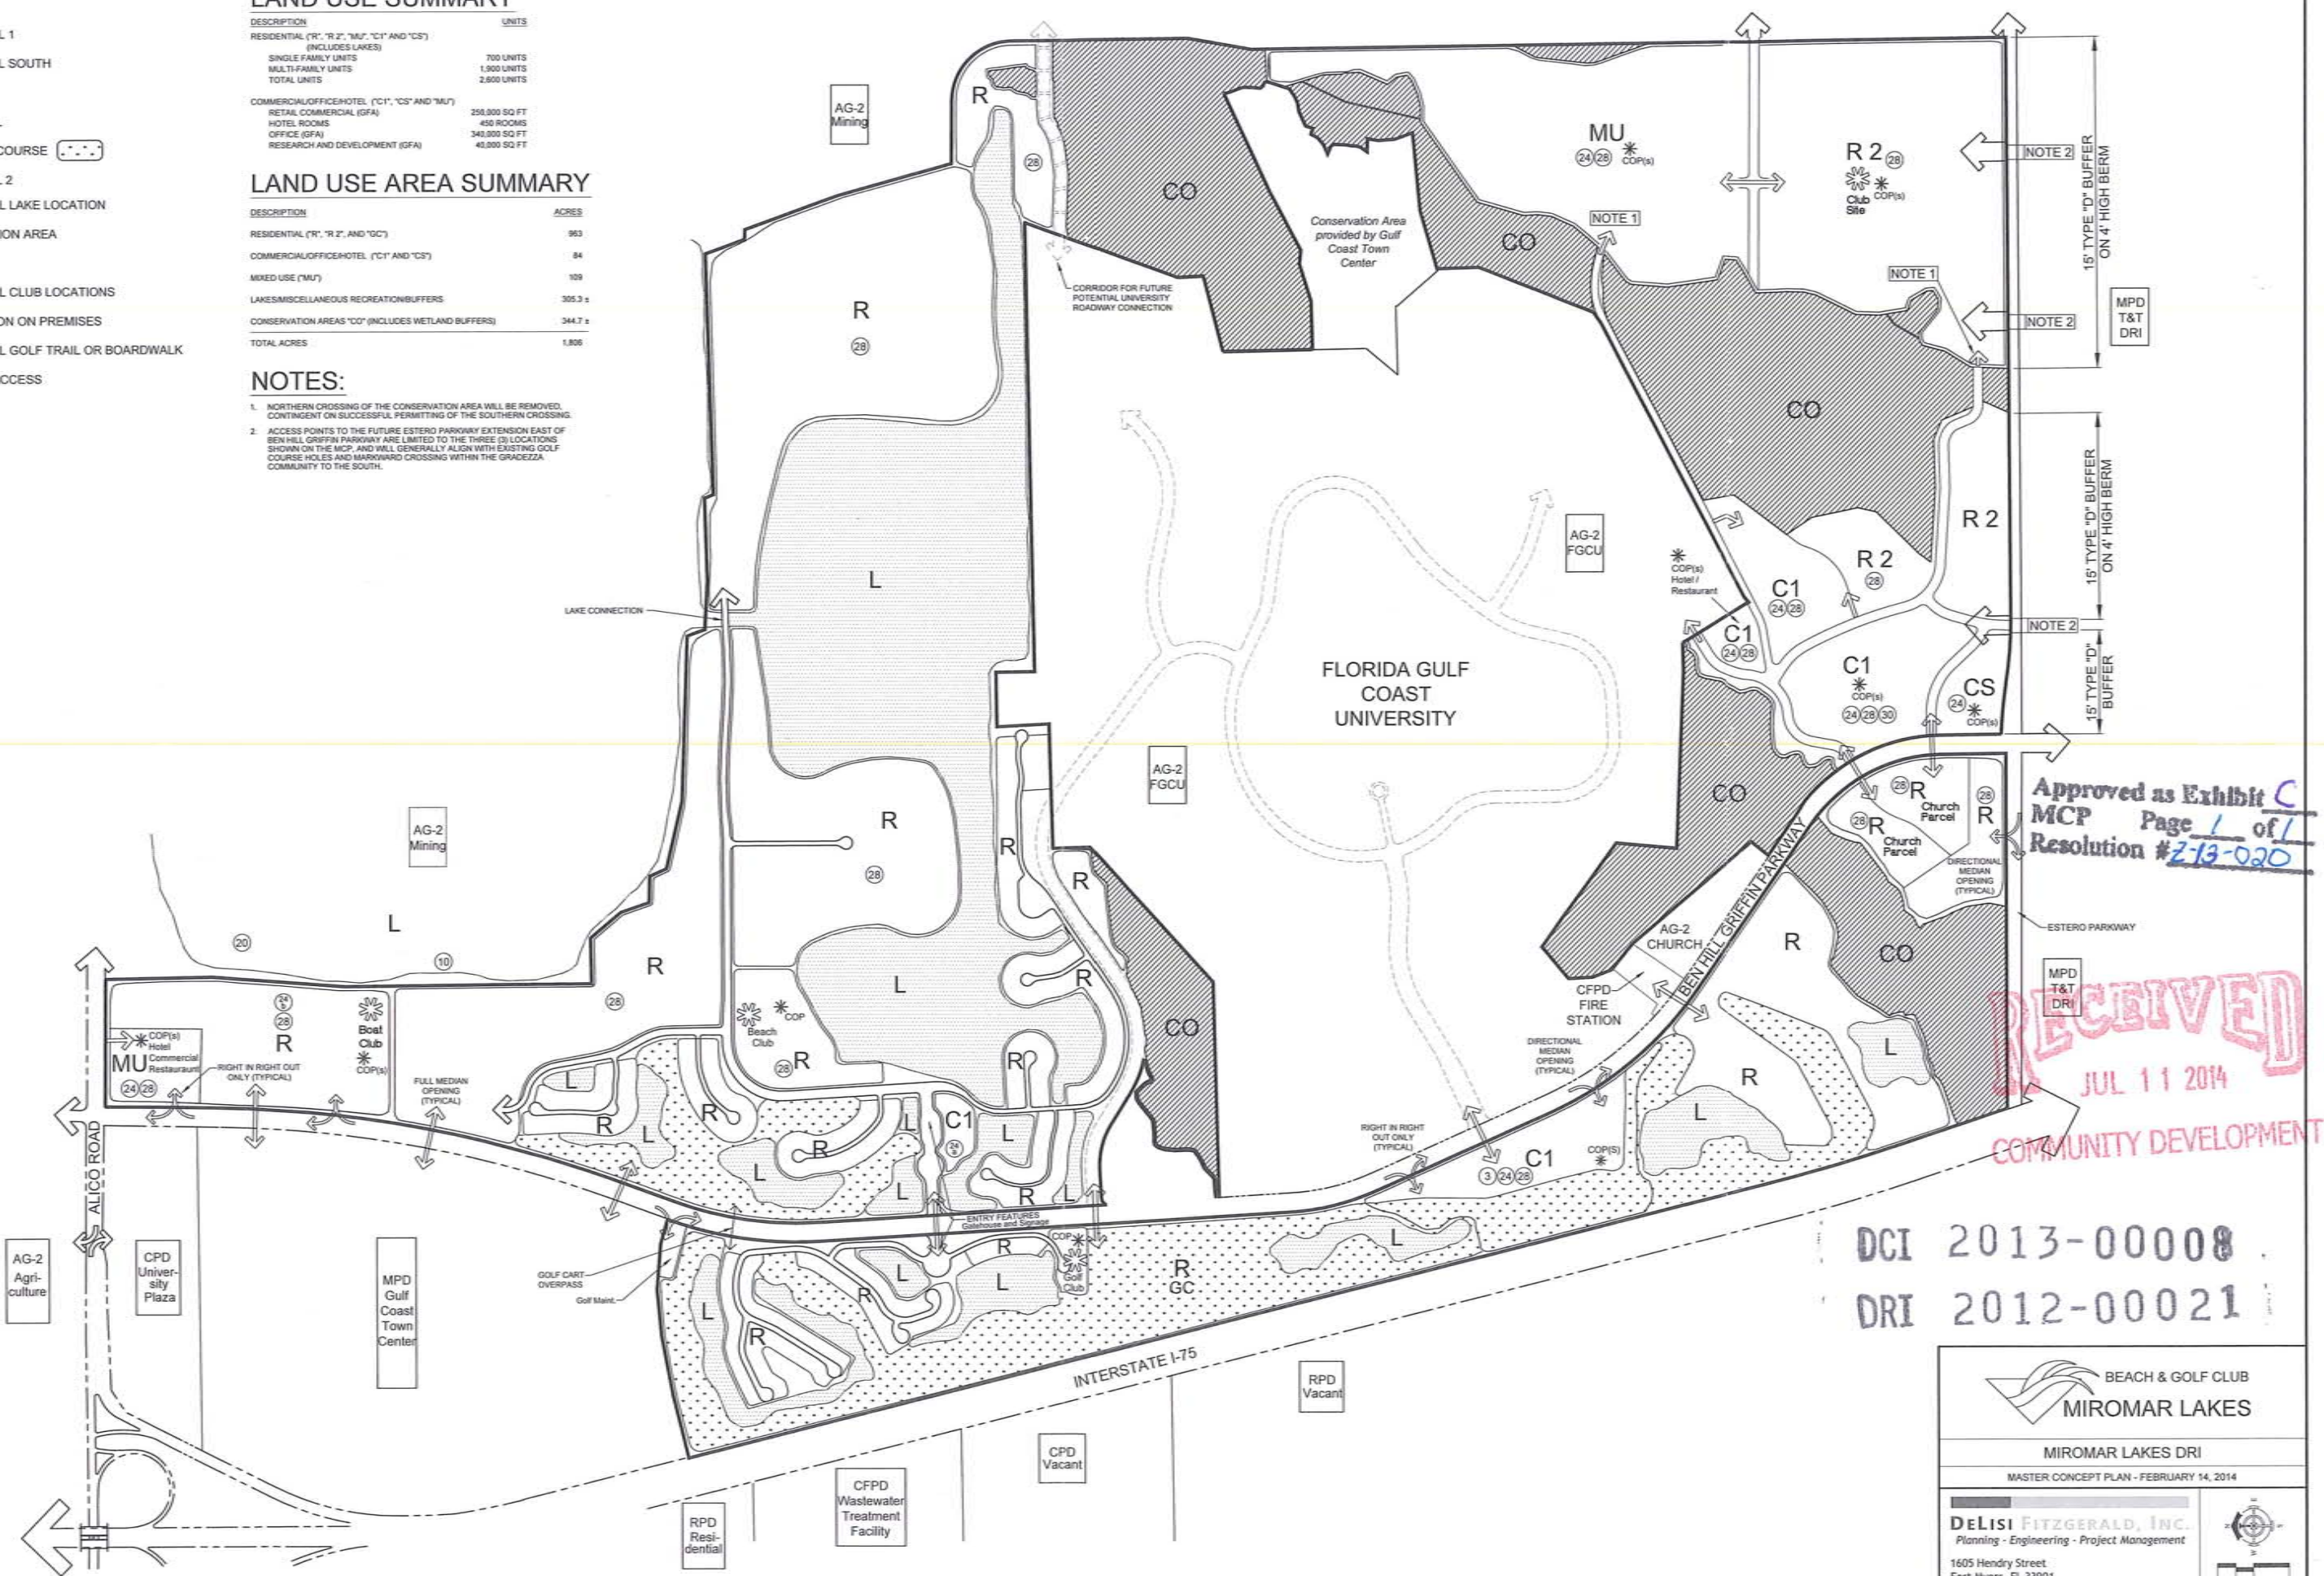

Approved as Exhibit C
MCP Page 1 of 1
Resolution #2-13-020

RECEIVED
JUL 11 2014
COMMUNITY DEVELOPMENT

DCI 2013-00008
DRI 2012-00021

BEACH & GOLF CLUB
MIROMAR LAKES

MIROMAR LAKES DRI

MASTER CONCEPT PLAN - FEBRUARY 14, 2014

DeLisi FITZGERALD, INC.
Planning - Engineering - Project Management

1605 Hendry Street
Fort Myers, FL 33901
239-418-0691 • 239-418-0692 fax




Exhibit D

Schedule of Uses and Property Development Regulations

PERMITTED USES AND STRUCTURES:

RESIDENTIAL "R"

Accessory uses and structures, including but not limited to the following:

- Private boat docks
- Private garages, carports and parking areas
- Private swimming pools and enclosures
- Private tennis courts
- Schools, noncommercial

Administrative offices

Agricultural uses and agricultural accessory uses (limited to existing only and subject to Condition #6)

Assisted living facility (density in accordance with LDC Section 34-1494)

Places of worship

Clubs: country, private, and fraternal

Accessory uses, including but not limited to:

- Bait and tackle shop
- Boat dock
- Boat ramp
- Consumption on premises, including outdoor seating (subject to Condition #21)
- Day care center, child
- Fishing pier
- Food and beverage service
- Locker rooms
- Personal services (Groups I and II, limited to ATM, barber or beauty shop, health club, and massage establishment)
- Pro shop
- Rental or leasing establishment, Group I, (limited to beach chairs umbrellas, boats, and other beach related items etc. excluding jet skis, wave runners, sea doo's and other similar personal water craft)
- Restaurants, Groups I, II, and III with consumption premises and outdoor seating (subject to Conditions #20 and 21)
- School, commercial, limited to boating and water skiing
- Specialty Retail Shop, Groups I and II
- Swimming pools
- Sports courts, including but not limited to tennis courts, racquetball courts, and basketball courts

Continuing care facility

Cultural facilities

Dwelling Units;

- Single-family
- Duplex
- Multiple-family Building
- Townhouse
- Two-family attached
- Zero lot line

Day care centers, adult and child
Entrance gates and gatehouse (subject to Condition #4)
Essential services
Essential service facilities, Group I
Excavation - water retention
Fences, walls
Golf Course
 Accessory uses, including but not limited to:
 Consumption on premises, including outdoor seating on the golf course and in the Snack Bar at the ninth hole, or other appropriate location(s)
 Cart barn
 Food and beverage service, limited
 Maintenance Facility
Helistop (subject to Condition #8 and prohibited within 500 feet of the Miromar Lakes southern boundary)
Home occupations (in accordance with LDC Section 34-1772)
Model Homes, Model Units and Model Display Center (limited to residential uses within Miromar Lakes)
 Accessory parking lot, accessory only to Model Homes, Model Units and Model Display Center
Plant nurseries (subject to Condition #6)
Parks, public and private
Real estate sales and rental office for Miromar Lakes project only
Recreational facilities, personal and private, including but not limited to:
 Fishing Piers Bike Paths
 Boardwalks Nature Trails
 Swimming Pools Boat Docks
 Tennis Courts Boat Ramps
 Horseshoe Pits Parks
 Shuffleboard Courts Playground
 Vita Course Bocce Courts
 Picnic Areas Jogging Paths
Recreational hall, private
Signs in compliance with LDC Chapter 30
Temporary uses, in accordance with LDC Section 34-3041 et seq., including but not limited to temporary construction trailers and sales offices
Water taxi stand

Any activity comparable in nature with the foregoing uses and which the Director of the Lee County Department of Community Development determines to be compatible in "R" district.

RESIDENTIAL "R-2"

Accessory uses and structures, including but not limited to the following:
 Private boat docks
 Private garages, carports and parking areas
 Private swimming pools and enclosures
 Private tennis courts
 Schools, noncommercial
Administrative offices

Agricultural uses and agricultural accessory uses (limited to existing only and subject to Condition #6)

Assisted living facility (density in accordance with LDC Section 34-1494)

Places of worship

Club, private (subject to Conditions 20 and 34, if applicable) Accessory uses, including but not limited to:

Consumption on premises including outdoor seating (subject to Condition #21)

Day care, child

Fishing piers

Locker rooms

Food and beverage service

Personal services (Groups I and II), limited to ATM, barber or beauty shop, health club, and massage establishment

Restaurants, Groups I, II, and III including outdoor seating (subject to Conditions #20 and 21)

Specialty retail shops (Groups I and II)

Swimming pools (subject to Condition #34)

Sports courts, including but not limited to tennis courts, racquetball courts, and basketball courts (subject to Condition #34)

Continuing Care Facility

Day care centers child, adult

Dwelling Units:

Single-family

Duplex

Multiple-family Building (subject to Conditions 20, 33 and 34, if applicable)

Townhouse

Two-family attached

Zero lot line

Entrance gates and gatehouses (subject to Condition #4)

Essential services

Essential service facilities, Group I

Excavation, water retention

Fences, walls

Home occupation (in accordance with LDC Section 34-1772)

Models: model display center, model homes and model units (limited to residential uses within Miromar Lakes)

Parking lot, accessory and temporary (in accordance with LDC Section 34-2022), and parking garage, accessory

Plant Nurseries (subject to Condition #6)

Real estate sales and rental office (for residential uses within Miromar Lakes only)

Recreation facilities, personal and private to include the following or other comparable uses:

Fishing piers

Bike paths

Boardwalks

Nature trails

Swimming pools

Tennis courts

Horseshoe pits

Parks

Vita course

Bocce courts

Picnic areas

Jogging paths

Recreational hall and accessory uses (subject to Condition #34)

Signs in compliance with LDC Chapter 30

Temporary uses, in accordance with LDC Section 34-3041 et seq., including but not limited to temporary construction trailers and sales offices

Any activity comparable in nature with the forgoing uses and which the Director of Lee County Department of Community Development determines to be compatible in the Miromar Lakes "R-2" district.

COMMERCIAL "C-1"

Accessory uses and structures customarily associated with the uses permitted in this District

Administrative offices

Agriculture uses and agricultural accessory uses (limited to existing only and subject to Condition 6)

Animal clinic

Amateur radio antennas and satellite earth stations (in accordance with LDC Section 34-1175)

Antenna-Supporting Structures (in accordance with LDC Section 34-1441 et seq.)

Assisted living facility

ATM (Automatic Teller Machine)

Auto repair and services, Group I - prohibited within 200 feet of the Miromar Lakes southern boundary.

Banks and financial establishments, Groups I and II

Bar or cocktail lounge, with outdoor seating (limited to one for the entire MPD, and subject to Deviations #3 or #30 and Condition #21)

Bed and breakfast

Broadcast studio, commercial radio and television

Business services, Group I (excluding: bail bonding and blood donor, stations) and Group II

Car wash

Caretaker's residence

Cleaning and maintenance services

Clothing stores

Clubs, commercial, fraternal and private (subject to Conditions 20 and 34, if applicable).

Accessory uses, including but not limited to the following:

Consumption on premises including outdoor seating (subject to Condition #21)

Day care center, child

Food and beverage service

Restaurants, Groups I, II, and III including outdoor seating subject to Conditions #20 and 21)

Locker rooms

Personal services, Groups I and II (limited to ATM's, barbershops or beauty clubs, and massage establishment)

Specialty retail shops, Groups I and II

Swimming pools (subject to Condition #34)

Sports courts, including but not limited to tennis courts, racquetball courts, and basketball courts (subject to Condition #34)

Computer and data processing

Consumption on premises (Subject to Condition #21 and Deviations 3 or 30, where applicable)

Continuing care facility

Convenience food and beverage stores (limited to a total of three (3) within the MPD) - prohibited within 200 feet of the Miromar Lakes southern boundary.

Cultural facilities

Day care center, adult, child

Department store

Drive-through facility for any permitted use

Drug store, pharmacy
 Dwelling units:
 Zero lot line
 Duplex
 Two-family attached
 Townhouse
 Multiple-family Building
 Entrance gates and gatehouses (subject to Condition #4)
 Essential services
 Essential service facilities, Group I
 Excavation: water retention
 Fences, walls
 Food stores, Groups I and II
 Gasoline dispensing system, special - prohibited within 200 feet of the Miromar Lakes southern boundary.
 Gift and souvenir shop
 Hardware store
 Health care facility, Groups I, II, III and IV
 Helistop (subject to Condition #8) - prohibited within 500 feet of the Miromar Lakes southern boundary.
 Hobby, toy, game shops
 Home occupation (in accordance with LDC Section 34-1772)
 Hospice
 Hotel, motel (subject to Condition 20, if applicable) and accessory uses, including but not limited to the following:
 Consumption on premises
 Restaurants, Groups I, II, III and IV (includes outdoor seating, subject to Condition #21)
 Specialty retail shops (Groups I and II)
 Day care center, child
 Personal services (Groups I and II), limited to ATM's barbershops or beauty shops, photo agents, health clubs, and massage establishment
 Household and office furnishings, Groups I and II
 Insurance companies
 Laundry or dry cleaning, Group I (excluding Plant)
 Lawn and garden supply store
 Library
 Medical office
 Model homes, model units and model display center (limited to residential uses within the Miromar Lakes project only)
 Non-store retailers, all groups
 Outdoor display of merchandise
 Package store (limited to one for the entire MPD, and subject to Deviations #3 or #30)
 Paint, glass and wallpaper
 Parcel and express service
 Parks, Group I (subject to Condition #34)
 Parking lots: accessory, commercial, garage, public, temporary (subject to LDC Section 34--2022)
 Personal Services: Groups I and II (excluding massage establishments and massage parlors)
 Pet services
 Pet shop
 Pharmacy

Photo finishing laboratory (in accordance with LDC Section 34-2443)
 Places of worship
 Plant nurseries - subject to Condition 6
 Post office
 Printing and publishing
 Real estate sales office and rental office (for uses within Miromar Lakes only)
 Recreational facilities - personal
 Recreational facilities - private, on-site, off-site (subject to Condition #34)
 Recreation commercial: Groups I, II, III and IV (subject to Condition #34)
 Recreational hall and accessory uses (subject to Condition #34)
 Religious facilities
 Rental and leasing establishments, Groups I, II and III
 Repair shops, Groups I and II
 Research and development laboratories, Groups I, II, and IV (in accordance with LDC Section 34-2443)
 Residential accessory uses and structures, including but not limited to the following:
 Private boat docks
 Private garages, carports and parking areas
 Private swimming pools and enclosures
 Private tennis courts
 Restaurants, Groups I, II, III and IV (Subject to Condition #20, if applicable)
 Consumption on premises, including outdoor seating (subject to Condition #21)
 Restaurants, fast food, including outdoor seating (subject to Condition #20)
 Schools, commercial
 Schools, non-commercial
 Self-service fuel pumps - prohibited within 200 feet of the Miromar Lakes southern boundary
 Signs in accordance with Chapter 30
 Social services: Groups I, II and III (in accordance with LDC Section 34-2443)
 Specialty retail shops, Groups I, II, III and IV
 Storage, indoor only
 Studios
 Temporary uses, in accordance with LDC Section 34-3041 et seq., including but not limited to temporary construction trailers and sales offices
 Theater, indoor
 Timeshare unit
 Used merchandise store: Groups I and II
 Variety store
 Wireless communications facilities (in accordance with LDC Section 34-1441 et seq.)
 Wholesale establishment, Group III

Any commercial use or professional service which is comparable in nature with the forgoing uses and which the Director of the Lee County Department of Community Development determines to be compatible in the Miromar Lakes "C-1" district.

COMMERCIAL "C-S"

Accessory uses and structures customarily associated with the uses permitted in this District
 Administrative offices
 Agriculture uses and agricultural accessory Uses (limited to existing only and subject to Condition 6)
 Animal clinic

Amateur radio antennas and satellite earth stations (in accordance with LDC Section 34-1175)
Assisted living facility (density in accordance with LDC Section 34-1494)
ATM (Automatic Teller Machine)
Auto repair and services, Group I - prohibited within 200 feet of the Miromar Lakes southern boundary
Banks and financial establishments, Groups I and II
Bed and breakfast
Broadcast studio, commercial radio and television
Business services, Group I (excluding: bail bonding and blood donor, stations) and Group II
Car wash
Caretaker's residence
Cleaning and maintenance services
Clothing stores
Clubs, commercial, fraternal and private (subject to Conditions 20 and 34, if applicable)
 Accessory uses, including but not limited to the following:
 Consumption on premises
 Day care center, child
 Food and beverage service
 Restaurants, Groups I, II, and III (including outdoor seating subject to Condition #21)
 Personal services, Groups I and II (limited to ATM's, barbershops or beauty clubs, and massage establishment)
 Specialty retail shops, Groups I and II
 Swimming pools (subject to Condition #34)
 Sports courts, including but not limited to tennis courts, racquetball courts, and basketball courts (subject to Condition #34)
Computer and data processing
Consumption on premises (Subject to Condition #21)
Continuing care facility
Convenience food and beverage stores (limited to a total of three (3) within the MPD) - prohibited within 200 feet of the Miromar Lakes southern boundary
Day care center, adult, child
Department store
Drive-through facility for any permitted use
Drug store, pharmacy
Dwelling units:
 Zero lot line
 Duplex
 Two-family attached
 Townhouse
 Multiple-family Building
Entrance gates and gatehouses (subject to Condition #4)
Essential services
Essential service facilities, Group I
Excavation: water retention
Fences, walls
Food stores, Groups I and II (subject to Condition #32)
Gasoline dispensing system, special - prohibited within 200 feet of the Miromar Lakes southern boundary
Gift and souvenir shop
Hardware store

Health care facility, Groups I, II and III
Hobby, toy, game shops
Home occupation (in accordance with LDC Section 34-1772)
Hospice
Hotel, motel (subject to Condition #20, if applicable)
 Accessory uses, including but not limited to the following:
 Consumption on premises
 Restaurants, Groups I, II, III and IV (includes outdoor seating, subject to Conditions #20 and #21)
 Specialty retail shops (Groups I and II)
 Day care center, child, adult
 Personal services (Groups I and II), limited to ATM's barbershops or beauty shops, photo agents, health clubs, and massage establishment
Household and office furnishings, Groups I and II
Insurance companies
Laundry or dry cleaning, Group I (excluding Plant)
Lawn and garden supply store (subject to Condition #32)
Library
Medical office
Model homes, model units and model display center (limited to uses within the Miromar Lakes project only)
Non-store retailers, all groups
Outdoor display of merchandise
Paint, glass and wallpaper
Parcel and express service
Parks, Group I (subject to Condition #34)
Parking lots: accessory, commercial, garage, public, temporary (subject to LDC Section 34--2022)
Personal Services: Groups I and II (excluding massage establishments and massage parlors)
Pet services
Pet shop
Pharmacy
Photo finishing laboratory (in accordance with LDC Section 34-2443)
Places of worship
Plant nurseries (subject to Condition 6)
Post office
Printing and publishing
Real estate sales office and rental office
Recreational facilities – personal
Recreational facilities - private, on-site, off-site (subject to Condition #34)
Recreation commercial: Groups I, II, III and IV (subject to Condition #34)
Recreational hall and accessory uses (subject to Condition #34)
Religious facilities
Rental and leasing establishments, Groups I, II and III
Repair shops, Groups I and II
Research and development laboratories, Groups I, II, and IV (in accordance with LDC Section 34-2443)
Residential accessory uses and structures, including but not limited to the following:
 Private boat docks
 Private garages, carports and parking areas
 Private swimming pools and enclosures

Private tennis courts
 Restaurants, Groups I, II, III and IV (Subject to Condition #20, if applicable):
 Consumption on premises, including outdoor seating (subject to Conditions #20 and 21)
 Restaurants, fast food, including outdoor seating (subject to Condition #20)
 Schools, commercial and non-commercial
 Self-service fuel pumps - prohibited within 200 feet of the Miromar Lakes southern boundary
 and subject to Condition #32
 Signs in accordance with LDC Chapter 30
 Social services, Groups I and II (Group II limited to job training, manpower training, and
 vocational training) in accordance with LDC Section 34-2443
 Specialty retail shops, Groups I, II, III and IV
 Storage, indoor only
 Studios
 Temporary uses, in accordance with LDC Section 34-3041 et seq., including but not limited to
 temporary construction trailers and sales offices
 Theater, indoor
 Timeshare unit
 Used merchandise store: Groups I and II
 Variety store

Any commercial use or professional service which is comparable in nature with the forgoing
 uses and which the Director of the Lee County Department of Community Development
 determines to be compatible in the Miromar Lakes "C-S" district.

MIXED USE AREA "MU"

Accessory uses and structures
 Administrative offices
 Agricultural uses and agricultural accessory uses (limited to existing only and subject to
 Condition #6)
 Animal clinic
 Assisted living facility (density in accordance with LDC Section 34-1494)
 ATM (Automatic Teller Machine)
 Auto repair and services, Group I
 Banks and financial establishments, Groups I and II
 Bed and breakfast
 Broadcast studio, commercial radio and television
 Business services, Group I (excluding: bail bonding and blood donor, stations) and Group II
 Cleaning and maintenance services
 Clothing stores
 Consumption on premises (subject to Condition #21)
 Continuing care facility
 Computer and data processing
 Convenience food and beverage stores (limited to a total of three (3) within the MPD)
 Cultural facilities
 Day care centers, adult and child
 Department store
 Dwelling Units:
 Single-family
 Duplex
 Multiple-family Building

Townhouse
 Two-family attached
 Zero lot line
 Drive-through facility for any permitted use
 Drug store, pharmacy
 Emergency medical service (ambulance station)
 Essential services
 Essential service facilities, Group I
 Excavation - water retention
 Fences, walls
 Food stores, Groups I and II
 Gasoline dispensing system, special
 Gift and souvenir shop
 Hardware Store
 Health care facility, Groups I, II, III, and IV
 Helistop (subject to Condition #8)
 Hobby, toy, game shops
 Home occupation
 Hospice
 Hotel, motel and accessory uses
 Household and office furnishings, Groups I and II
 Insurance companies
 Laundry or dry cleaning, Group I (excluding Plant)
 Lawn and garden supply store
 Library
 Medical office
 Model homes, model units and model display center (limited to uses within Miromar Lakes)
 Non-store retailers, all Groups
 Outdoor display of merchandise
 Paint, glass and wallpaper
 Parcel and express service
 Parks, Groups I and II (excluding arenas and fairgrounds)
 Parking lots: accessory, commercial, garage, public and shared, and temporary (Subject to LDC
 Section 34-2022)
 Personal services: Groups I & II (excluding massage establishments and massage parlors)
 Pet services
 Pet shop
 Pharmacy
 Photo finishing laboratory (in accordance with LDC Section 34-2443)
 Places of worship
 Post office
 Printing and publishing
 Recreation - personal
 Recreation - private, on-site, off-site
 Recreation commercial: Groups I, II, III and IV
 Rental and leasing establishments, Groups I, II and III
 Repair shops, Groups I and II
 Research and development laboratories, Groups I, II, III, and IV (in accordance with LDC
 Section 34-2443)
 Residential accessory uses, including but not limited to the following:
 Private boat docks

- Private garages, carports and parking areas
- Private swimming pools and enclosures
- Private tennis courts
- Schools, noncommercial
- Restaurants, Groups I, II, III and IV:
 - Consumption on premises including outdoor seating (subject to Condition #21)
- Restaurants, fast food, including outdoor seating
- Self-service fuel pumps
- Signs in compliance with LDC Chapter 30
- Schools, commercial and non-commercial
- Social services, Groups I, II and III (in accordance with LDC Section 34-2443)
- Specialty retail shops, Groups I, II, III and IV
- Storage, indoor only
- Studios
- Temporary uses, in accordance with LDC Section 34-3041 et seq., including but not limited to
 - temporary construction trailers and sales offices
- Theater, indoor
- Timeshare unit
- Used merchandise store: Groups I and II
- Variety store
- Wireless communications facilities (in accordance with LDC Section 34-1441 et seq.)

Any activity comparable in nature with the foregoing uses and which the Director of the Lee County Department of Community Development determines to be compatible in "MU" district.

CONSERVATION AREA "CO"

- Interpretive centers, rain shelters, gazebos
- Nature and foot trails including boardwalks and jogging paths
- Paths, boardwalks, and bridges to provide access from the uplands to the wetlands and to allow
 - fishing piers, observation towers and golf cart crossings
- Recreational shelters, restroom facilities, passive parks, and picnic areas
- Signs in compliance with LDC Chapter 30
- Water Management Facilities
- Wildlife Management
- Mitigation Activities
- Accessory uses and structures customarily associated with the uses permitted in this district

Any activity comparable in nature with the foregoing uses and which the Director of the Lee County Department of Community Development determines to be compatible in "CO" district.

NOTE: References to certain uses being subject to specific conditions or LDC provisions are informational guides and do not change the applicability of the conditions or LDC provisions to other uses, not so specified, or make the referenced condition or LDC provision applicable to the specified use if not required by the condition or LDC provision. Restrictions or prohibitions of certain uses or within specified distances are controlling.

Property Development Regulations

RESIDENTIAL PROPERTY DEVELOPMENT REGULATIONS:

LAND USES	Minimum Lot or Tract			Minimum Building Setbacks (ft)					Max # of Habitable Floors/Max Building Height ^(3 & 8)	Min. Bldg Separation (ft)	Max. Lot Cover
	Area (sq ft)	Depth (ft)	Width ¹ (ft)	Side Incl. Corner	Rear abut Lots	Rear abut CO/Golf	Front ²	Water Body ^{5&6}			
SINGLE-FAMILY RESIDENTIAL USES											
Single-Family Detached	5,500	70	50	5	20	10	12 ⁴ or 20	0 ^{5&6} or 20	45	10	55%
Patio/Cluster Homes	3,500	70	35	5	10	10	12 ⁴ or 20	0 ^{5&6} or 20	45	10	55%
Zero Lot Line, Single-Family Attached or Townhouse	2,800	70	25	0 or 5	10	10	12 ⁴ or 20	0 ^{5&6} or 20	45	10	55%
Overwater Residential Uses ⁶	3,500	70	35	0 ⁶ or 5	0 ⁶ or 10	n/a	12 ⁴ or 20	0 ^{5&6} or 20	45	0 or 10	55%
MULTIPLE-FAMILY RESIDENTIAL USES											
Multiple-Family	6,000	100	n/a	10	20	10	20	0 ^{5&6} or 20	45/65	10	55%
Overwater Residential Uses ⁵	6,000	100	n/a	0 ⁵ or 10	0 ⁵ or 20	n/a	20	0 ^{5&6} or 20	45/65	20	55%
Assisted Living Facility	10,000	100	100	12½	20	10	20	20	45/65	25	55%
OTHER USES											
Clubhouse and Dry Boat Storage	n/a	n/a	n/a	5	20	10	n/a	0 ^{5&6} or 20	45	10	n/a
Accessory Structures	n/a	n/a	n/a	5	10	10	n/a	0 ^{5&6} or 20	45	n/a	n/a

Notes:

¹ Pie-shaped lots and flag lots are not required to meet minimum lot widths.

² Measured from back of curb where the back of curb is at the ROW or street easement.

³ Maximum building height of 65 feet where allowed by Deviation 28. See Deviation 28 and Exhibit B-7 for the location of the buildings with heights greater than 45 feet.

⁴ The 12' setback applies only to the non-garaged part of a house or for units with a side entry garage.

⁵ A maximum of 1,500 linear feet of lake frontage will have a 0' setback for buildings and accessory uses.

⁶ Structures, including residential and commercial buildings, may extend on pilings over the man-made lakes within Miromar Lakes so long as they do not extend past the platted property lines.

⁷ Conversion of uses restricted as set out in Section II.D.7 of the DRI Development Order.

⁸ See Conditions 32 and 33 of the Zoning Resolution for locations of maximum heights less than 45 feet.

COMMERCIAL PROPERTY DEVELOPMENT REGULATIONS

LAND USES	Minimum Lot or Tract			Minimum Building Setbacks (ft)					Max Building Height ^(3 & 8)	Min. Bldg Separation (ft)	Max. Lot Cover
	Area (sq ft)	Depth (ft)	Width ¹ (ft)	Side Incl. Corner	Rear abut Lots	Rear abut CO/Golf	Front ²	Water Body ^{5&6}			
CONVENTIONAL DEVELOPMENT TRACTS											
Commercial Use	10,000	100	100	0 or 15	20	10	15	0 ^{5&6} or 20	45/65	0 or ½ bldg. height	55%
Hotel and Office Use	10,000	100	100	0 or 15	20	10	15	0 ^{5&6} or 20	45/65	0 or ½ bldg. height	55%
Overwater Uses ⁶	10,000	100	100	0 ⁵ or 15	0 ⁵ or 20	n/a	15	0 ^{5&6} or 20	45/65	0 or ½ bldg. height	55%
LOTS WITHIN DEVELOPMENT TRACTS											
All Uses	1,300	65	20	0 or 5	0 or 20	10	15	0 ^{5&6}	45/65	0 or ½ bldg. height	100%
OTHER USES											
Accessory Structures	n/a	n/a	n/a	5	10	10	n/a	0 ^{5&6}	n/a	n/a	n/a

Notes:

¹ Pie-shaped lots and flag lots are not required to meet minimum lot widths.

² Measured from back of curb where the back of curb is at the ROW or street easement.

³ Maximum building height of 65 feet where allowed by Deviation 28. See Deviation 28 and Exhibit B-7 for the location of the buildings with heights greater than 45 feet.

⁴ The 12' setback applies only to the non-garaged part of a house or for units with a side entry garage.

⁵ A maximum of 1,500 linear feet of lake frontage will have a 0' setback for buildings and accessory uses.

⁶ Structures, including residential and commercial buildings, may extend on pilings over the man-made lakes within Miromar Lakes so long as they do not extend past than the platted property lines.

⁷ Conversion of uses restricted as set out in Section II.D.7 of the DRI Development Order.

⁸ See Conditions 32 and 33 of the Zoning Resolution for locations of maximum heights less than 45 ft.

DEC 29 2009

DEC 28 2000

LEGEND



CURRENT AGRICULTURAL USE
53.0 ACRES / Grazing - Livestock

MIROMAR LAKES
NORTH PARCEL
AGRICULTURAL EXHIBIT
Scale 1"=1000'-0"

2009-00017

[illegible]

Date: 12/21/08
 Signature: _____



AGRICULTURAL EXHIBITS - NORTH PARCEL
MIOMAR LAKES
MIOMAR LAKES, FLORIDA




1000

B

PROJECT NO.
712 NO. 1
(12/12/12)

EXHIBIT E

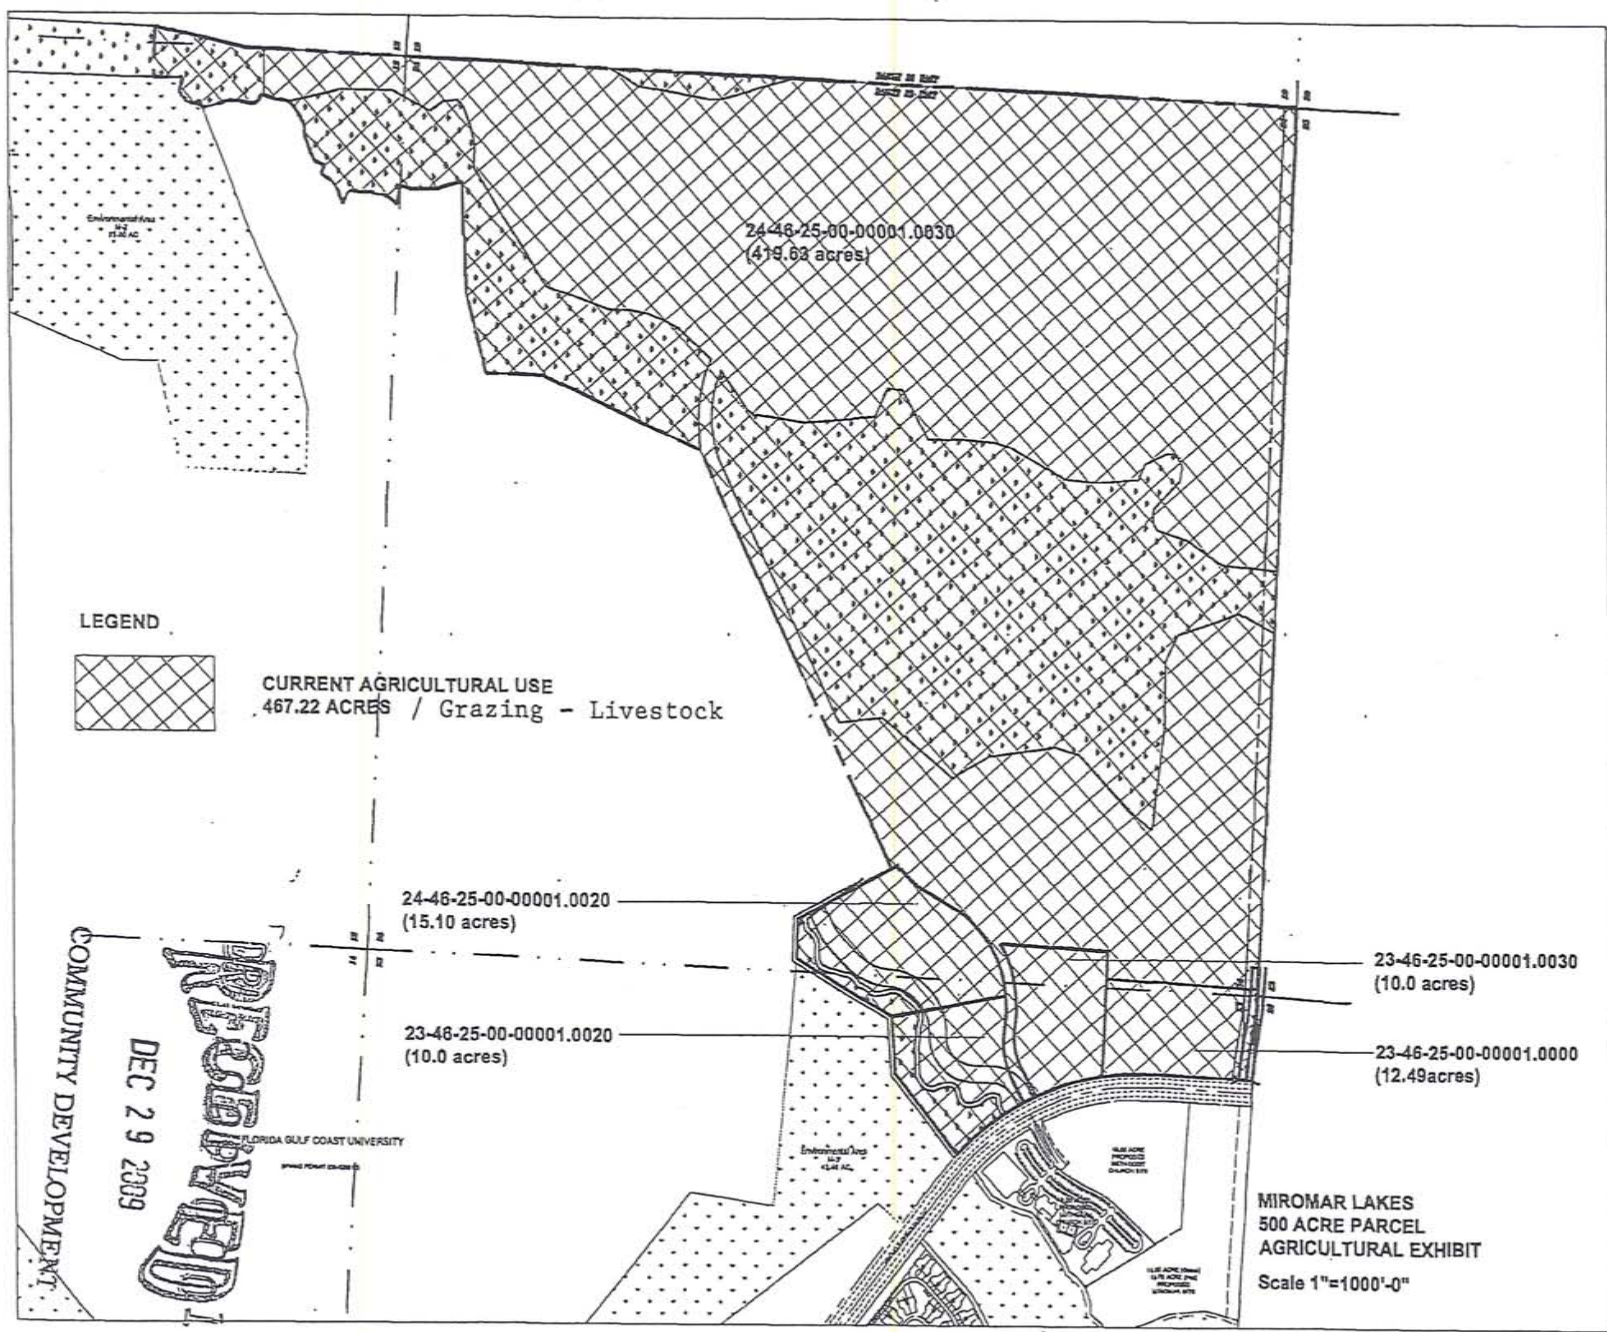



BEACH & GOLF CLUB
MIROMAR LAKES

AGRICULTURAL EXHIBIT - 500 ACRE PARCEL
MIROMAR LAKES
MIROMAR LAKES, FLORIDA



Scale 1"=1000'-0"

Drawn By
Checked By
Date

EXHIBIT
B

PROJECT NO.
DATE

AMENDED BIG CYPRESS FOX SQUIRREL

WILDLIFE-MANAGEMENT PLAN

For The

MIROMAR LAKES DRILL.L.C.

March 2000

Originally Prepared by:

W. Dexter Bender & Associates, Inc.
2052 Virginia Avenue
Fort Myers, FL 33901

March 2000

Amended by:

Wilson Miller, Inc.
4571 Colonial Boulevard
Fort Myers, FL 33912

January ~~XX~~, 2002

EXHIBIT F
Page 1 of 7

Amended Big Cypress Fox Squirrel Management Plan
Miromar Lakes DRI

1

INTRODUCTION

A Big Cypress fox squirrel management plan for the Miromar Lakes DRI was prepared by W. Dexter Bender & Associates, Inc. in March 2000. Since that time, Miromar Lakes L.L.C. acquired an additional 500 acres of land (hereafter referred to as the Addition Parcel) adjacent to the existing development in Sections 13, 23, and 24, Township 46 South, Range 25 East; and Section 18, Township 46 South, Range 26 East; Lee County, Florida. At the time of this writing, the Addition Parcel was being added to the Miromar Lakes DRI via the Notice of Proposed Change process.

Big Cypress fox squirrels (*Sciurus niger avicennia*) have been documented on the Miromar Lakes property and the Addition Parcel during recent-listed species surveys. This species is classified under State law and regulations as a threatened species. Development plans for this site—the original Miromar Lakes DRI project included preservation of four areas designated as Miromar Lakes Conservation Areas. These Conservation Areas contain both wetlands and uplands, which may provide suitable fox squirrel habitat. Development plans for the Addition Parcel include preservation of four additional preservation areas containing suitable wetland and upland fox squirrel habitats that will be enhanced and/or restored as part of the proposed project.

This amended management program plan was prepared to address the protection of Big Cypress fox squirrels (fox squirrel) on both the original Miromar Lakes DRI property and the Addition Parcel during and after construction and the maintenance, management, and potential enhancement of habitats contained in the Conservation Areas.

IDENTIFICATION

The fox squirrel is much larger than any other squirrel species in Florida. All fox squirrels have a white muzzle and forehead, and most have white patches on the backsides of the ears. The underside can be white, creamy yellow, rusty orange or black. The tail is long and bushy.

SQUIRREL HABITAT

Fox squirrels prefer open pine flatwoods and open pine-oak systems but can be found in pine-cypress stands and cypress strands. They forage extensively on the ground and do not do well where there is heavy ground cover. Periodic fires that kill hardwoods and promote grassy ground cover are necessary for populations to survive.

Original Miromar Lakes DRI Property

In Miromar Lakes' existing and potential fox squirrel habitat has been identified (see Figures 1 and 2) by Wilson-Miller staff as part of the original DRI process that began back in 1995. The existing habitat has been impacted from the invasion of melaleuca over the past four decades. Much of this existing habitat west of Ben Hill Griffin Parkway will become golf course. Golf courses with pine trees are suitable areas for fox squirrels. Landscaping along the roughs will include leaving pines, where appropriate, and planting pines to replace some that will be lost.

Areas in the mitigation sites will contain fox squirrel habitat. Mitigation areas in M1, and M2 will retain more existing native vegetation than M3 and M4. Each of these areas will have some pine flatwoods and mixed pine and cypress systems. At present, all but M2 are heavily impacted with melaleuca. There are ±138.86 acres of pine FLUCCS (411 and 416) identified in Figure 1 as existing potential habitat. Melaleuca has invaded these pine areas. As of the 1993 survey done by Wilson Miller ±129.4 acres were 34-66% melaleuca and ±9.46 acres were 10-33% melaleuca. Over the past seven years melaleuca has increased its density, but no surveys have been done. Much of the contiguous potential habitat area (±106.14 acres) west of Ben Hill Griffin Parkway will become a golf course. Some of the golf course will provide habitat for fox squirrels

Amended Big Cypress Fox Squirrel Management Plan
Miromar Lakes DRI

2

(roughs and pine trees lining some of the tees, fairways and holes). The typical golf course management will be attractive for fox squirrel use.

Habitat that will be managed for fox squirrels and other wildlife will occur in the four conservation areas (M1, M2, M3 and M4). These areas will have ± 80.86 acres of pine FLUCCS (411, 416, and 641/621/411) and ± 59.55 acres of cypress (621). All of the exotics will be removed from these areas. Planting of trees will occur in M3 and M4 as the result of extensive rework in some or most of these conservation/mitigation areas.

The developer will turn over the maintenance of the fox squirrel habitat to the existing Miromar Community Development District (CDD) for perpetual management.

Addition Parcel

In the Addition Parcel, existing and potential habitat has been identified (see Figures 31 and 42) by WilsonMiller staff. As in the original DRI property, the existing habitat has been impacted from the invasion of melaleuca over the past four decades. Much of the existing pine flatwoods with palmetto understory (FLUCCS 411) habitat will become golf course and residential areas. Golf courses with pine trees are suitable areas for fox squirrels. Landscaping along the roughs will include leaving pines, where appropriate.

Habitat that will be managed for fox squirrels and other wildlife will occur in the five conservation areas (Conservation Areas #1 through #5). The majority of the forested wetlands and some of the forested upland areas will be preserved, enhanced, and/or restored in the conservation areas. Enhancement and restoration activities will include the removal of exotics (eg., melaleuca) and planting of trees to improve fox squirrel habitat. Following enhancement/restoration, the forested portions of the conservation areas will include cypress swamps (2-58.54 acres), hydric pine flatwoods (2-18.44 acres), and mixed cypress-pine-cabbage palm forest (2-30.66 acres), upland pine flatwoods (2-11.65 acres), and live oak hammock (3.87 acres). These forested wetland areas will provide nesting and foraging habitat for fox squirrels.

The conservation areas will be maintained as fox squirrel habitat and will be placed under a conservation easement granted to the South Florida Water Management District. The developer will turn over the maintenance of the fox squirrel habitat to the existing Miromar Community Development District (CDD) for perpetual management.

MANAGEMENT DURING CONSTRUCTION

Efforts will be made during the various phases of construction to help ensure the safety of fox squirrels. Actions taken will include, but may not be limited to, the following:

- **Educational pamphlets** will be provided to contractors with contractual obligations to distribute this information to construction workers. These pamphlets will provide information regarding the special status of fox squirrels, the appearance of fox squirrels and their nests/day-beds, and measures to be taken during construction to help protect these squirrels. Workers performing clearing work will be informed to exercise caution in the immediate area where a fox squirrel is observed.
- **Inspection of areas to be cleared.** Prior to clearing within approximately 100 feet of forested areas, which constitute potential fox squirrel habitat, a qualified biologist will inspect the area to be cleared for the presence of fox squirrel nests. If a nest is observed, this person will visually inspect the nest interior to check for young. If no fox

squirrels are present, the nest will be removed to discourage squirrels from returning to the area of impact. If young fox squirrels are observed in the nest, a buffer having a radius of approximately 75 feet will be cordoned off around the tree using enviro-fence. No heavy construction will be performed in this buffer area until after the young fox squirrels leave the nest or the squirrels and nest are re-located. Any re-location activities would first be coordinated with and approved by the Florida Fish and Wildlife Conservation Game and Fresh Water Fish Commission (FWCGFC).

- **Coordination during clearing.** Workers involved in clearing of trees will be advised to call the project biologist if a fox squirrel is seen in an area being cleared. The project biologist and/or a specified crewmember will then chase the fox squirrels out of the area being cleared. The area will be inspected for fox squirrel nests and clearing activities will be continued if no nests are found.

PUBLIC EDUCATION

A program will be established to educate Miromar Lakes residents, visitors, and maintenance staff about fox squirrels. This program will include, but may not be limited to, the following:

- **Educational pamphlets** will be provided to all homeowners to inform residents of the potential presence of fox squirrels on site. Pamphlet information will include:
 1. A picture and description of the fox squirrel and its status as a listed species;
 2. Notes regarding the life history and ecology of the fox squirrel;
 3. Information regarding the interaction of the public with the fox squirrels, such as the potentially negative effects of feeding and of interactions with the squirrels;
 4. A note to homeowners who have dogs, requiring that they leash their dogs;
 5. Advice to homeowners that free-running house cats are predators of squirrels and that no house cats should be allowed to roam free; and
 6. A map showing the Conservation Areas together with a discussion of the protected status and nature of these areas.
 7. Grey squirrels are serious competitors for fox squirrels
- **Educational pamphlets and/or instructions** will be provided to the Miromar CDD personnel and golf course maintenance personnel by their supervisors regarding the safety and protection of fox squirrels encountered by workers onsite.
- **A notice will be posted** at the golf club informing golfers of Conservation Areas, the appearance and special status of fox squirrels and precautions to avoid harm to them.

HABITAT MANAGEMENT & MAINTENANCE ACTIVITIES AND SCHEDULE

Habitat Management & Maintenance Activities

Those portions of the Miromar Lakes property designated as Conservation Area in the permit will be managed and maintained in an effort to allow certain vegetation types in those areas to function as suitable fox squirrel habitat. While the primary goal of management of the Conservation Areas is to mitigate for wetland impacts, certain portions of those areas will also have a potential to provide habitat for fox squirrels. These areas potentially suitable for fox squirrels include pine flatwoods, pine-cypress wetlands and hammocks.

All management and maintenance activities will initially be the responsibility of the permittee. Eventually, this responsibility will be transferred to the Miromar Lakes CDD. All management and maintenance efforts will be performed by or under the direction of a qualified biologist or other

Amended Big Cypress Fox Squirrel Management Plan
Miomar Lakes DRI

4

qualified environmental professional. Potential management and maintenance activities may include, but are not limited to, the following:

- Eradication of exotic and nuisance plant species within the Conservation Areas. The goal of these efforts will be to control the spread of these plants such that they constitute no more than 5 percent of the total vegetative cover present in a given Conservation Area between control periods. Exotic plant species targeted will include those listed by the Exotic and Pest Plant Council at the time of permit issuance. Nuisance plant species targeted will include any invasive native plant species deemed undesirable, from the standpoint of competition with desirable vegetation, by the permittee.
- Periodic chopping, mowing, and/or bush-hogging of the ground cover stratum within pine flatwoods and pine-cypress wetlands in the Conservation Areas. This will occur on an "as needed" basis to help maintain a relatively open understory (an open "park-like" habitat) and to suppress the growth of weedy or noxious vegetation. Maintenance personnel will be advised to leave pine cones, cabbage palm fruit, bromeliads, acorns, and ground fungi within the Conservation Areas as undisturbed as is feasible.
- Pruning and/or thinning of canopy and subcanopy vegetation within pine flatwoods and pine/cypress wetlands in the Conservation Areas. This will occur on an "as needed" basis to maintain an appropriate density of desirable woody species (e.g., trees and shrubs), particularly in the subcanopy stratum, thereby maintaining a relatively open midstory.
- Prescribed burns within the Conservation Areas. Such burns may be conducted to remove accumulated decomposed organic matter ("duff") thereby promoting new plant growth, to reduce fuel loading which could minimize the potential adverse effects of uncontrolled fires, and to thin out ground cover and subcanopy vegetation. The burns would be performed on an "as needed" basis, and would be coordinated with the appropriate agencies.
- Reduction of gray squirrel populations in portions of the Conservation Areas. This would be conducted only in instances where it is determined that such populations represent a competitive threat to the continued survival of fox squirrels and other management options fail to improve the fox squirrel population. Gray squirrel populations would be controlled via live trapping (with subsequent release outside the Conservation Areas) and/or controlled hunting. Either method may require permission from Lee County and possibly coordination/permitting through FWC-GFC.
- Removal of feral cats from the Conservation Areas. This would be performed as necessary via live trapping of the cats. Captured individuals would be turned over to Lee County Animal Control. This method would require warnings to adjacent landowners, permission from Lee County and possibly coordination with Lee County Animal Control.
- Planting of desirable native trees within the Conservation Areas. Following initial eradication of exotic plants within the Conservation Areas, it may be determined that planting of native tree species is warranted where the exotic eradication efforts leave areas relatively devoid of native trees. Should such plantings be conducted, the following table lists potential species that may be planted. The specific species planted will depend on site conditions and market availability of plant material. The density of plantings and stock used will depend on site conditions. Re-planting would be conducted if the mortality of planted trees is deemed excessively high.

Amended Big Cypress Fox Squirrel Management Plan
Miomar Lakes DRI

5

Common Name	Scientific Name
Strangler fig	<i>Ficus aurea</i>
Slash pine	<i>Pinus elliottii</i>
Laurel oak	<i>Quercus laurifolia</i>
Cabbage palm	<i>Sabal palmetto</i>
Bald cypress	<i>Taxodium distichum</i>

Habitat Management / Maintenance Schedule

There will be a management/maintenance schedule (or program) for the Conservation Areas. The following sections describe the short and long-term schedules.

Maintenance Schedule

The management/maintenance schedule will begin as of the date the permittee begins the first phase of construction of Phase I of Miomar Lakes. It will terminate on the date the fifth annual monitoring report required by SFWMD is submitted.

Management and maintenance will be initiated once the permittee has obtained all requisite permits necessary for construction of Phase I from SFWMD, the Corps, and Lee County and when construction actually begins (the start date). Initial eradication of exotic plants, an activity conducted pursuant to Corps permit requirements for the project, will be started at this time. It is anticipated that initial exotic and nuisance plant eradication efforts would be completed within a year of this start date. Most prescribed burns would probably not be conducted until the exotic eradication efforts are completed, although localized prescribed burns could be conducted prior to such completion in areas where there are relatively few exotics. Planting of native trees would occur following eradication of exotics and any initial controlled burns. Any initial bush-hogging of the ground cover stratum and initial pruning and/or thinning of canopy and subcanopy woody species would also not occur until initial exotic eradication efforts and initial controlled burns are completed. It is anticipated that all these initial activities would be completed within approximately 2.5 years from the start date.

Following completion of initial management activities, continued management and maintenance activities would be performed as necessary. ~~Determination of the necessary activities will be made by a qualified biologist~~ A qualified biologist will make the determination of the necessary activities or similar environmental professional based on annual and possibly, during the first few years, semi-annual inspections of the Conservation Areas. Activities recommended by the biologist would be performed during the year following a given inspection. The exact date of initiation of certain activities, such as prescribed burns, brush-hogging, and re-planting, may be dependent on an appropriate time of year in which to perform the activities. It is anticipated that exotic and nuisance plant control will be conducted on a minimum semi-annual basis for the first two years after the initial eradication effort is completed. Thereafter, it may be possible to reduce the frequency of these activities.

Conditions present within a given Conservation Area will be documented in the annual monitoring reports submitted to SFWMD pursuant to the permitted monitoring schedule. Management activities performed since the previous annual report will be discussed and recommended management activities together with an anticipated schedule for conducting these activities will be discussed in these reports.

Following the termination of the management/maintenance program, the permittee will evaluate the need for further management and maintenance activities, the schedule for such activities, and the schedule for further inspections and reports. If the permittee determines that additional

management and maintenance activities are necessary, the permittee's findings along with a proposal regarding any future efforts (maintenance/management activities, schedules, etc.) will be submitted to Lee County for review and approval. Any new program for the continued management and maintenance of the Conservation Areas will thus be determined by the proposal approved by the County.

The permittee reserves the ability to modify the long-term management/maintenance program for the Conservation Areas at any time following its initiation. No modifications would be made unless first approved by Lee County. Such modifications might be deemed necessary to improve upon current concepts of management activities and/or schedules. It is also possible that the fox squirrel habitat management program for a particular Conservation Area could be discontinued entirely should it be determined that fox squirrels no longer inhabit the area.

PLANTINGS OUTSIDE OF CONSERVATION AREAS

Plantings in golf course open space/rough areas and in upland buffers adjacent to or in the immediate vicinity of the Conservation Areas will incorporate, where feasible, trees and shrubs that could provide favorable foraging, nesting, and/or resting habitat for fox squirrels. These plantings may include, but are not limited to, the species identified in the table ~~that~~ which follows.

Common Name	Scientific Name
Strangler fig	<i>Ficus aurea</i>
Slash pine	<i>Pinus elliottii</i>
Laurel oak	<i>Quercus laurifolia</i>
Cabbage palm	<i>Sabal palmetto</i>
Bald cypress	<i>Taxodium distichum</i>
Dahoon holly	<i>Rex cassine</i>
Live oak	<i>Quercus virginiana</i>
Saw palmetto	<i>Serenoa repens</i>

DRI 2001-00004

DCI 2001-00033

LEE COUNTY
RECEIVED

03 AUG 14 AM 8:05

MIROMAR LAKES
SNAIL KITE MANAGEMENT PLANCOMM. DEV./
PUB. WRKS. CNTR.
SECOND FLOOR

Project Description

The proposed project is comprised of residential and commercial uses. Residential is composed of neighborhoods for single family, multi-family and rental uses. Commercial sites are planned to serve both residents of Miromar Lakes and the expanding, surrounding neighborhood including the Florida Gulf Coast University (FGCU). The boundaries of Miromar Lakes are generally defined by Alico Road to the north, property boundary lines to the east, I-75 to the west and FGCU and property boundary lines to the south.

History

A snail kite was observed on the northern portion of the Miromar Lakes project area. This species is listed as Endangered by both the Florida Game and Fresh Water Fish Commission (FGFWFC) and the U.S. Fish and Wildlife Service. In May and early June, 1994, a solitary male kite was seen in Section 11 foraging in nearby agricultural ditches (FLUCCS 513). The second sighting was assumed to be the same bird. No females or immatures were seen. No mating or nesting behavior was observed and no snail kite nests were observed on the project site. This species was not seen during the last two weeks of the survey, nor has it been seen during any of a multitude of site visits by Wilson Miller biologists since then. Empty apple snail (*Pomacea paludosa*) shells were observed in aquatic habitats, usually near cattails. The apple snail is reported to be the exclusive diet of the snail kite.

The site contains a food resource, but generally lacks a large scale, persistently flooded, emergent scrubby marshland for nesting, the observed bird is thought to have been passing through the property at the time of the survey. Given the large scale wetland enhancement associated with the project, the food resource is not anticipated to be impacted. As a result, it is not anticipated that the species will be significantly impacted by the project. At the suggestion of Darryl Land with FGFWFC, Jack Abney called Jim Rodgers on August 7, 1998, to confirm this. Mr. Rodgers wrote the chapter on snail kites⁽¹⁾ in the book Rare and Endangered Biota of Florida Vol. V, Birds and was described by Land as a snail kite specialist.

According to Rodgers, the time of year the bird was sighted is when snail kites wander erratically and often roost in unusual places. Abney described the location and habitat on site that is used by the kite, which is a shallow borrow pit vegetated primarily by cattail. Mr. Rodgers said cattail was not good foraging habitat for kites and that he personally had never seen a kite successfully capture a snail in dense cattail. He opined that this bird would probably move on in a short while.

In Rodgers' report⁽¹⁾ on snail kites, he describes good foraging habitat as follows. "Kites capture snails by aerial hunting over foraging habitat that consists of relatively shallow (30-90 cm), clear and calm water.

(Sykes 1987a). Furthermore, ideal foraging habitat must have relatively open water with a low density of emergent vegetation (e.g. *Eleocharis* spp., maidencane... etc.) allowing kites to see and capture snails as they move along the stems feeding or rising to the surface...". The project area does not appear to fit that description.

A study of snail kite movements and site fidelity was conducted by Bennetts and Kitchens (1997)⁽²⁾. The scope of their study was to "include the entire population of Snail Kites in Florida..." No area of Lee County in the vicinity of the Miromar Lakes DRI was reported to be significant to snail kites. Their study determined that "there is considerable interchange of birds among wetlands in Florida." Bennetts (1997) also states that "...snail kites exhibit high rates of movement and frequently use different wetlands from one year to the next."

Corroboration of the poor quality of habitat provided by cattail is described in the report by Bennetts and Kitchens (1997)⁽²⁾. On page 124 of that report the authors cite Darby⁽³⁾ and others: "*Darby et al. (1996c) found low abundance of apple snails associated with substrates containing high flocculent debris. Such a substrate often occurs in cattail. Plant species that respond to nutrients e.g., sawgrass, cattail... also may increase in biomass, choking out the more open water used by kites for foraging. The availability of apple snails to kites requires sufficiently open water to enable visual detection.*"

Based on this information, we have determined that no impact to snail kites is likely as a result of development of this site. However, to provide potential foraging opportunity for any kites that may wander through this area, portions of the on-site lakes will be enhanced to provide emergent herbaceous vegetation as potential habitat for apple snails. The Management Plan includes three components: 1) the creation of shallow littoral zones, 2) the removal of exotic vegetation along certain existing lake edges, and 3) subsequent planting of native species in these areas.

Littoral Zone Creation

Littoral zones will be created in accordance with the attached lake Littoral Planting Plan (see WMBP File No. D-0253-12. The planting plan includes three types of planting areas: 'A', 'B' and 'C'. Areas designated 'A' are standard littoral zones to be planted with herbaceous species. Areas designated 'B' have been selected for reforestation. Areas designated 'C' will include a bulkhead. A littoral zone will be created waterward of the bulkhead that will be planted with herbaceous species. The planting plan includes a list of species suitable for each elevation zone. Herbaceous species include arrowhead, pickerelweed, spikerush, and others that are suitable for apple snails. Note that the plantings will be clustered.

Exotic/Nuisance Species Removal/Adjacent Tree Plantings

Exotic and nuisance species will be removed from the shorelines of existing lakes that will remain in the proposed site plan. In areas designated 'B' on the above referenced Littoral Planting Plan, several tree

species will be planted. These include sweet bay magnolia, cypress, red maple, loblolly bay and dahoon holly.

Monitoring and Maintenance

Once plantings have been completed, annual monitoring and maintenance will be conducted. The monitoring will include a narrative description of the littoral zone, an estimate of the survival of planted species and an estimate of the cover of exotic and nuisance species. Annual reports will be provided to Lee County Division of Planning, Environmental Sciences for a five year period.

References

- (1) Rare and Endangered Biota of Florida. Vol. V, Birds. Florida Snail Kite, pp. 42-51. Ed. By James A. Rodgers, Jr., Herbert W. Kale II and Henry T. Smith, Florida Committee on Rare and Endangered Plants and Animals. University Press of Florida, 1996.
- (2) The Demography and Movements of Snail Kites in Florida. By Robert E. Bennetts and Wiley M. Kitchens. USGS/Biological Services Division, Florida Cooperative Fish and Wildlife Research Unit. Technical Report No. 56. 1997.

See esp. pp.: 84, 89, 118 (maps), 124 (discussion of cattail).

- (3) Darby, P. C., et al. 1996b. Ecological Studies of Apple Snails (*Pomacea paludosa*). 1995 Report prepared for SFWMD and St. Johns River WMD. Florida Cooperative Fish and Wildlife Research Unit, Gainesville, FL.

DRI2012-00021/DCI2013-00008

MIROMAR LAKES

OPEN SPACE AND INDIGENOUS PRESERVATION

Required Open Space:

Open space requirements for Miromar Lakes will be met within Miromar Lakes. Required open space will be calculated on the development area excluding the existing mining lakes.

Required Open Space Percentage:

Residential Users:

Residential uses must provide 40% common open space for tracts requiring open space.

The following are exempt from open space requirements:

- (1) Single family residence on a lot with a minimum lot size of 6,500 square feet and a maximum 45% lot coverage; and
- (2) Duplex on a single lot with a minimum lot size of 7,500 square feet and a maximum 45% lot coverage; and
- (3) Two-family attached units each on an individual minimum lot size of 3,750 square feet per unit and a maximum 45% lot coverage.

Commercial Users:

Commercial users will provide 30% open space. A minimum of 10% open space will be provided in each commercial tract with the remaining open space provided within Miromar Lakes development.


Mixed Uses:

When a tract includes a mix land uses, the required open space percentage will be prorated according to the extent of the uses within the tract.

Required Indigenous Preservation:

The required indigenous preservation includes:

- (1) A minimum of 328 acres of indigenous preservation and restoration in substantial compliance with the areas delineated on the Master Concept Plan; and
- (2) Cypress wetland preservation as detailed in Condition 17; and
- (3) Preservation within common open space as detailed in Condition 16.

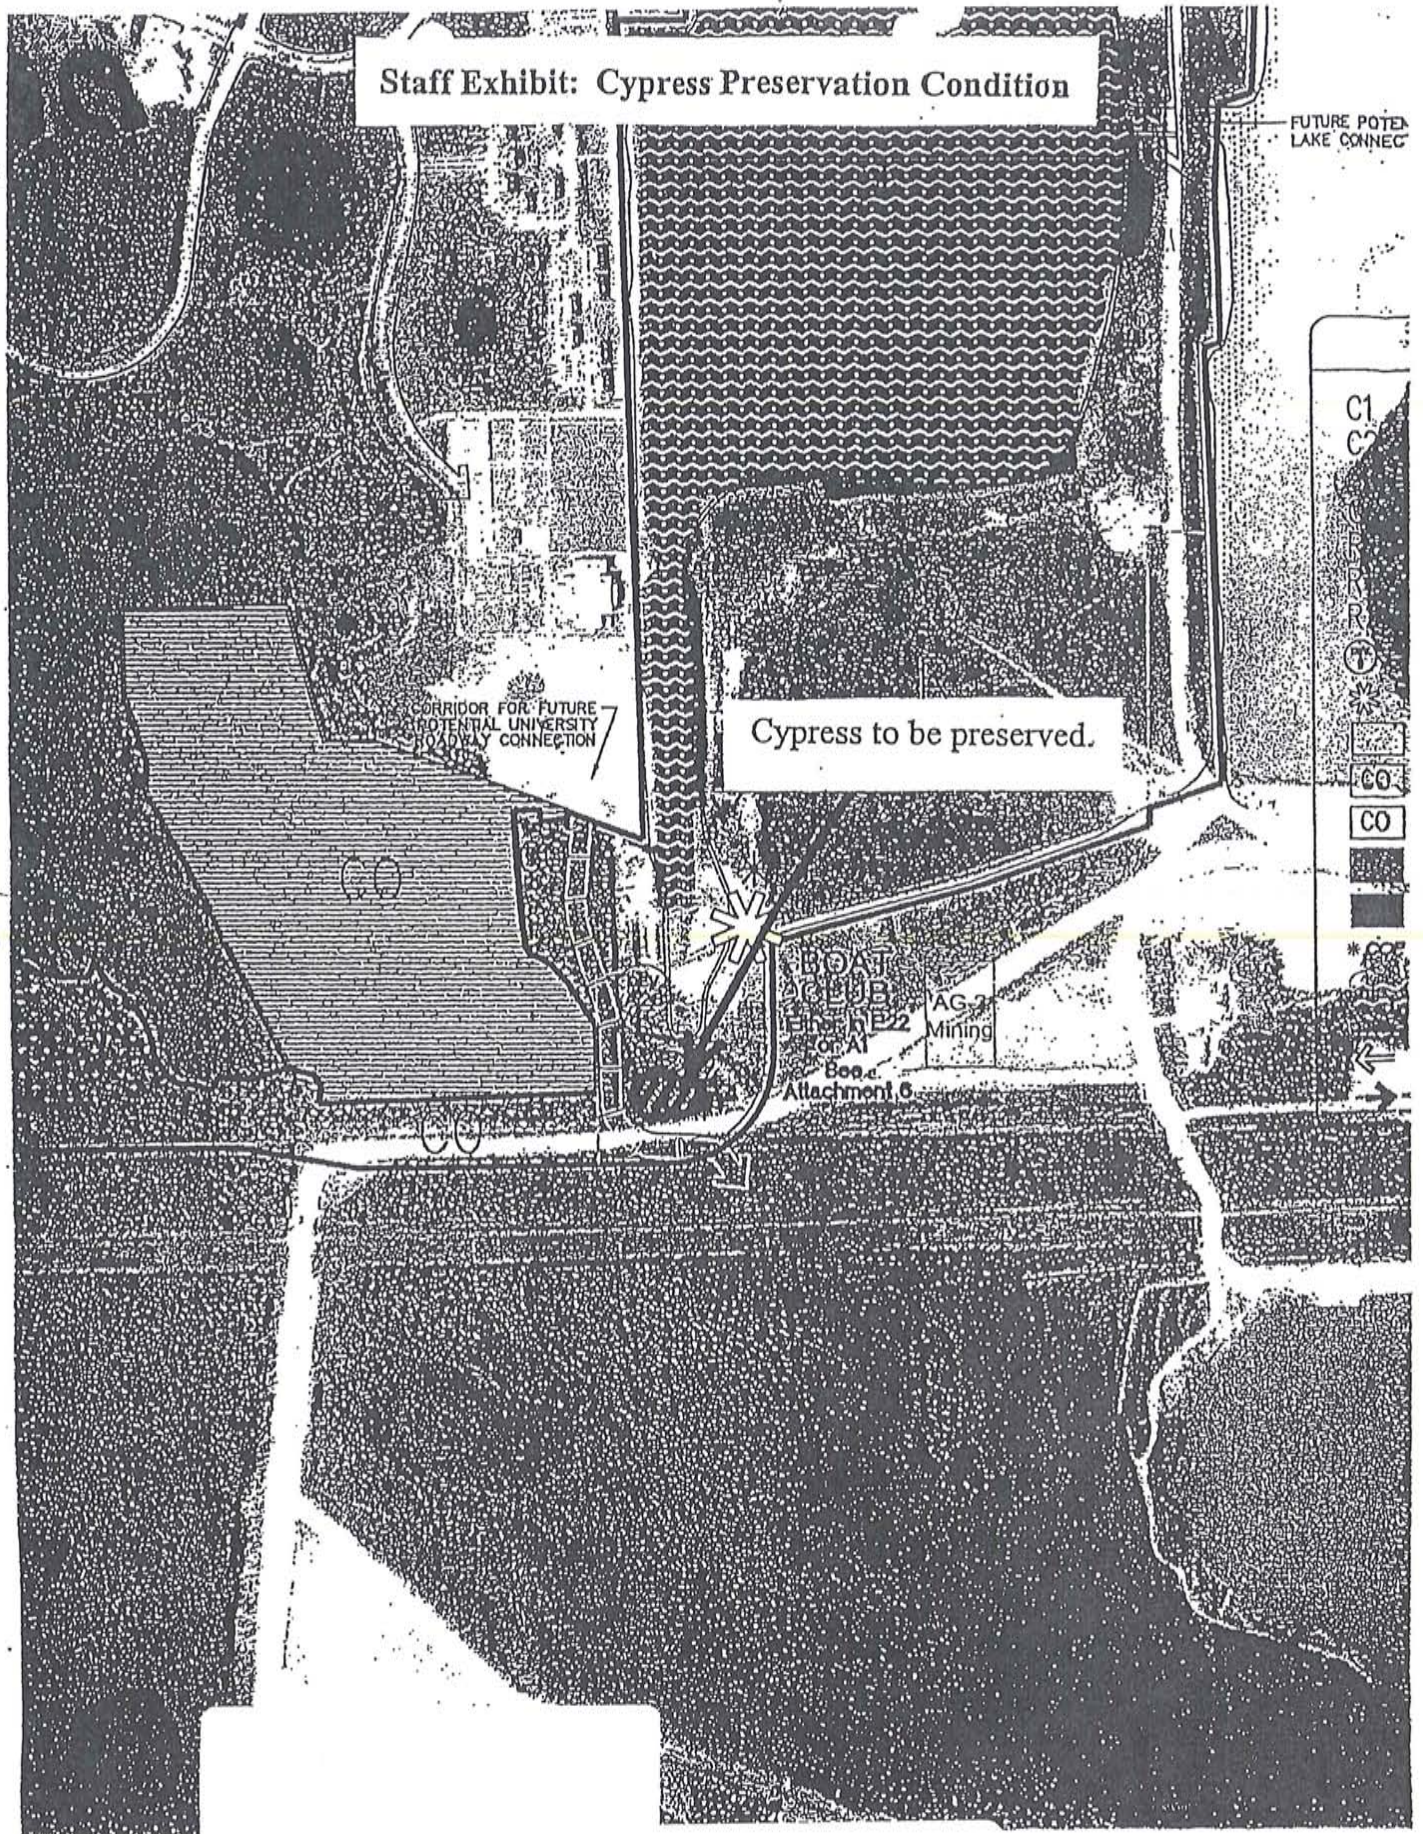

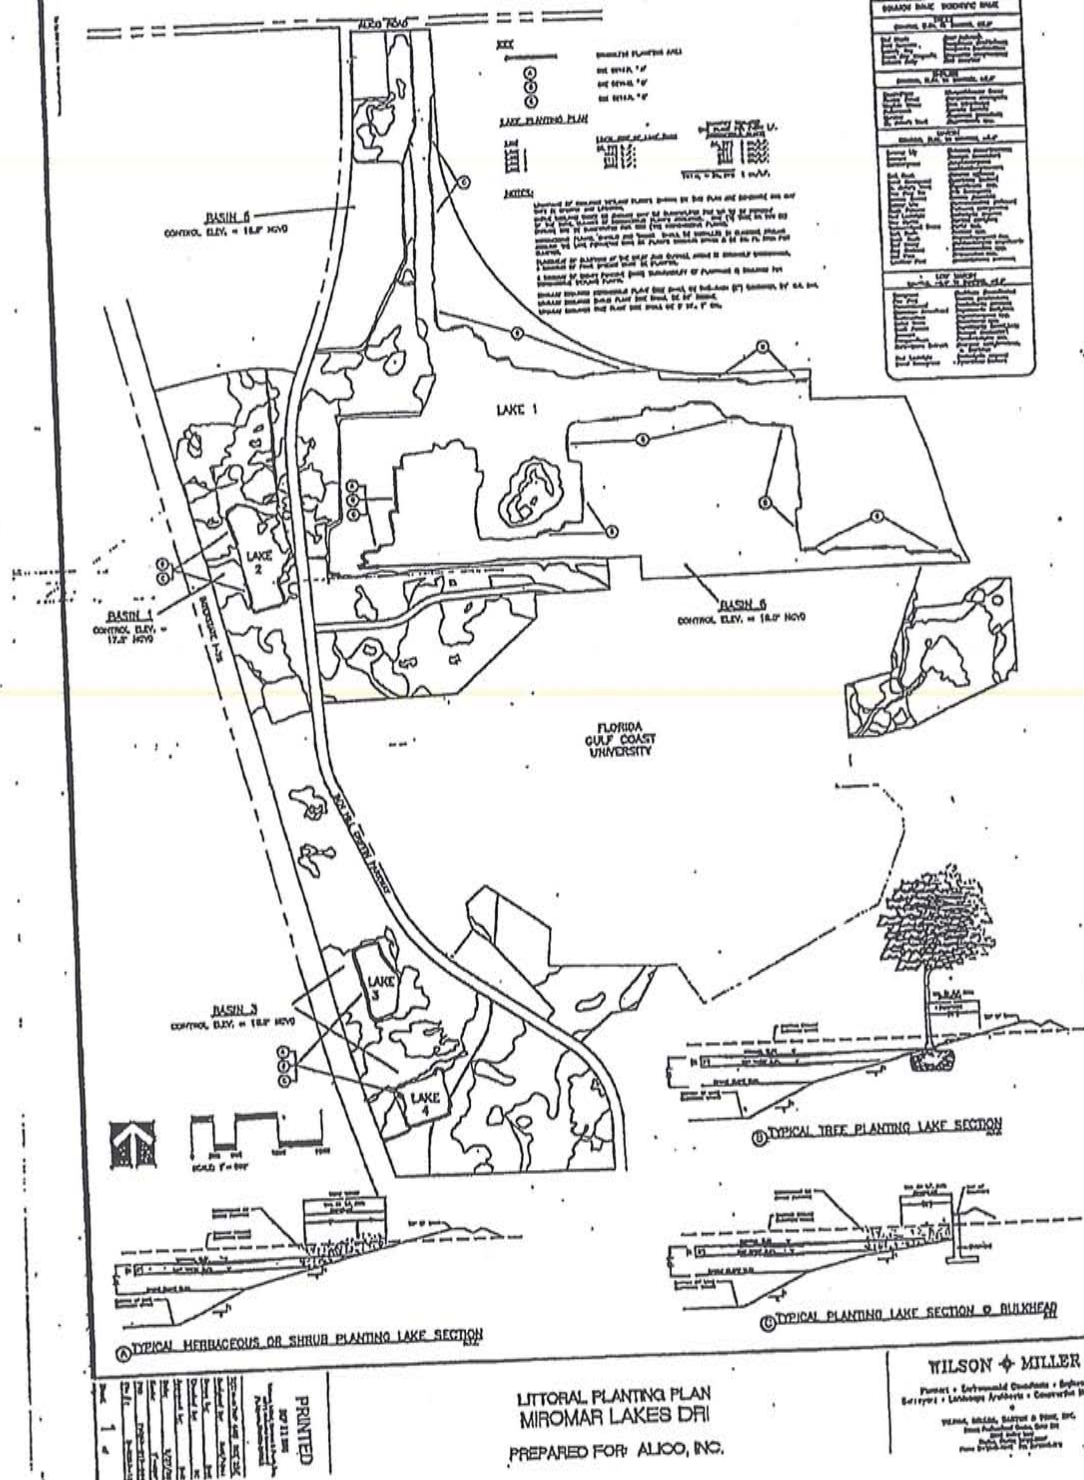


EXHIBIT K

EIGHTH DEVELOPMENT ORDER¹
AMENDMENT FOR MIROMAR LAKES
(CODIFIED)
A DEVELOPMENT OF REGIONAL IMPACT
STATE DRI #11-9798-142

LET IT BE KNOWN THAT, PURSUANT TO SECTION 380.06 OF THE FLORIDA STATUTES, THE BOARD OF COUNTY COMMISSIONERS OF LEE COUNTY, FLORIDA ADOPTED THE APPLICATION FOR DEVELOPMENT APPROVAL ORIGINALLY SUBMITTED AS THE ALICO AMDA, BUT THEREAFTER REDUCED TO AN ADA AND RENAMED AS THE MIROMAR LAKES DRI (HEREINAFTER REFERRED TO AS MIROMAR LAKES) BY ALICO, INC., AS THE OWNER/APPLICANT, FOR MIROMAR LAKES, L.L.C., AS THE DEVELOPER.

WHEREAS, on November 29, 1999 the Lee County Board of County Commissioners (Board), adopted the Development of Regional Impact (DRI) Application for Development Approval for the project known as Miromar Lakes, subject to conditions, restrictions and limitations; and

WHEREAS, the Miromar Lakes DRI Development Order was subsequently amended on December 10, 2002 to revise the adjustment rate applicable to the unpaid balance of the proportionate share assessment; and

WHEREAS, the Miromar Lakes DRI Development Order was amended a second time on December 15, 2003, to add approximately 534 +/- acres of property to the project (total project to be 1805 +/- acres). This change included a proposal to increase the number of golf holes by 18, add a clubhouse, and golf maintenance facility on the property; and

WHEREAS, in 2001, the Board approved a request to amend the Lee Plan to change the future land use designation of 19.85 +/- acres from "Density Reduction Groundwater Resource" to "University Community" and also to re-designate 170.92± acres from "University Community and Wetlands" to "Conservation Lands-Uplands" and "Conservation Lands – Wetlands"; and

WHEREAS, the project build out date was extended pursuant to HB7203 to December 31, 2011 by the third amendment of the Miromar Lakes DRI Development Order (Resolution 07-09-18), adopted August 21, 2007; and

¹ This is a codification and a restatement of all DRI Development Orders rendered with respect to Miromar Lakes within Lee County, including actions taken on November 29, 1999, December 10, 2002, December 15, 2003, August 21, 2007, January 26, 2010, and September 20, 2010, April 16, 2012, and June 18, 2014.

WHEREAS, on January 26, 2010, the DRI Development Order was amended a fourth time to extend the build out date from December 31, 2011 to December 31, 2013, pursuant to SB360; and

WHEREAS, on September 20, 2010, the DRI Development Order was amended a fifth time to change the buildout from December 31, 2013 to December 31, 2020, the termination date from December 31, 2018 to December 31, 2026, change from annual to biennial reporting for transportation monitoring reports, and to eliminate Conditions II.A.2. and 3. relating to the re-analysis of affordable housing needs; and

WHEREAS, the DRI Development Order was amended a sixth time on October 11, 2011 to amend the compliance dates as follows: Buildout from December 31, 2020 to December 31, 2024 and the termination date from December 31, 2026 to December 31, 2030; and

WHEREAS, the DRI DO was amended a seventh time on April 16, 2012 to remove 12± acres from the project pursuant to a transfer of property to the Florida Gulf Coast University; and

WHEREAS, Miromar Lakes LLC has filed the current application to amend the DRI an eighth time to reflect the effect of SB 2156 and several Emergency Orders on the compliance dates and concurrency status.

NOW, THEREFORE, be it resolved by the Board of County Commissioners of Lee County, Florida, that the Development Order for Miromar Lakes DRI is hereby further amended as follows:

I. FINDINGS OF FACT AND CONCLUSIONS OF LAW.

- A. Miromar Lakes is a master planned community located in unincorporated south Lee County, east of I-75, north of Corkscrew Road, south of Alico Road, on either side of Ben Hill Griffin Parkway. The site is 1,793.646 +/- acres. Miromar is a mixed use development that will consist of: 2,600 residential units, 250,000 square feet of retail, 450 hotel rooms, 340,000 square feet of office, 250 wet slips, 400 dry slips, 40,000 square feet of research and development, and all accessory uses to these uses. In addition, there will be 312 acres of lakes/buffers and recreation, and a minimum of 338 of conservation lands. The recreational uses will include golf, tennis, clubhouses, and active and passive recreation. The legal description of the project is set forth in Exhibit A.

The assessment was based on a phasing schedule that includes two five-year phases described in Exhibit B. Site preparation commenced upon completion of all necessary permitting. The project buildout date is ~~December 31, 2024~~April 3, 2028. The termination date is ~~December 31, 2030~~April 3, 2033.

Water supply and wastewater treatment will be provided by Lee County Utilities.

- B. The factual findings, conclusions of law, conditions and other terms of this Development Order apply to the property legally described in Exhibit A and known as the Miromar Lakes DRI.
- C. The original 1,271.12± acres was zoned AG-2, and coincident with the 1999 approval of the Development Order the property was rezoned to a Mixed Use Planned Development (MPD). In the recent past, portions of the property have been utilized for mining and related activity. The mining, and related activity, will cease on any portion of the property under active development. The 534 +/- acre addition was initially zoned AG-2, but was rezoned to MPD coincident with the Second DRI Development Order Amendment. The 12+/- acres were located in the original 1,271.12+/- acres. With the sale of the 12+/- acres the original parcel will total 1,259.12+/- acres.
- D. The AMDA went through sufficiency and a report and recommendation were issued. The application was put on hold, then reduced to an Application for Development Approval (ADA). The ADA for Miromar Lakes is consistent with the requirements of Section 380.06, Florida Statutes. The project went through two sufficiency rounds and the Developer exercised its right to refuse participation in further rounds.
- E. The development is not located in an area designated as an Area of Critical State Concern under the provision of Section 380.05, Florida Statutes.
- F. The development does not unreasonably interfere with the achievement of the objectives of the adopted State Land Development Plan. The development is consistent with the State Comprehensive Plan if it is developed in accordance with the development parameters and conditions of approval set forth in this development order.
- G. The development has been reviewed by the Southwest Florida Regional Planning Council (SWFRPC) and is the subject of reports and recommendations adopted by that body on December 17, 1998 and June 21, 2001. The SWFRPC report and recommendations were subsequently forwarded to Lee County pursuant to Section 380.06, Florida Statutes. The development, as proposed in the ADA and modified by this Development Order, is consistent with the reports and recommendations of the SWFRPC pursuant to Section 380.06(11), Florida Statutes.
- H. The development, as conditioned, is located in, and is consistent with, the University Community, "Conservation Lands - Uplands", and "Conservation Lands-Wetlands" future land use categories.

- I. The conditions set forth below meet the criteria found in Section 380.06(15)(d), Florida Statutes.
- J. The Phase II and build out dates were extended by three years to 2012 and 2017 respectively pursuant to House Bill 7203, which amended Florida Statutes, Section 380.06(19)(c).
- K. Senate Bill 360 (SB360), as signed into law by the Governor of the State of Florida on June 1, 2009 (codified as a note to F.S. §§373.414 and 380.06) provided a statutory two-year extension to build out dates expiring between September 1, 2008 through January 1, 2012. The Board of County Commissioners recognized the statutory extension in Lee County Resolution 09-06-22, adopted on June 23, 2009,

In accord with SB 360, Miromar Lakes DRI qualified for a two-year extension of its build out date from December 31, 2011 to December 31, 2013. Under Lee County Resolution 09-06-22, concurrency is also extended to December 31, 2013, consistent with the build out extension. Under SB 360, the two-year extension does not constitute a substantial deviation of the original development order approvals warranting further DRI review.

- L. House Bill 7207 (HB7207), as signed into law by the Governor of the State of Florida on June 2, 2011 (as codified in Chapter 2011-139, Laws of Florida) authorized a four year extension for all valid DRI Development Orders. At the option of the developer, all commencement, phase, buildout and expiration dates for valid Developments of Regional Impacts may be extended by four years regardless of previous extensions issued in the past.

In accord with HB 7207, Miromar Lakes DRI qualified for the four-year extension of its build out date from December 31, 2020 to December 31, 2024. Under Lee County Resolution concurrency is also extended to December 31, 2024, consistent with the build out extension. Under HB 7207, the extension of the DRI's compliance dates does not constitute a substantial deviation and cannot be considered in the future in determining whether there has been a substantial deviation of the original development order approvals warranting further DRI review.

In accordance with SB2156, and Emergency Orders 12-140, 120192, 120217, 120199, Miromar Lakes DRI qualified for the extension of its build out date from December 31, 2024 to April 3, 2028. Under Lee County Resolution concurrency is also extended to April 3, 2028, consistent with the build out extension. The extension of the DRI's compliance date does not constitute a substantial deviation and cannot be considered in the future in determining whether there has been a substantial deviation of the original development order approvals warranting further DRI review.

II. ACTION ON THE REQUEST AND CONDITIONS OF APPROVAL.

NOW THEREFORE, be it resolved by the Board of County Commissioners of Lee County, Florida, in a public meeting duly advertised, constituted and assembled June 18, 2014, the ~~Seventh~~Eighth Amendment to the Miromar Lakes Development of Regional Impact is hereby approved subject to the conditions, restrictions and limitations that follow. For the purpose of this Development Order, the term "Developer" refers to Miromar Lakes, L.L.C., and includes all of its successors or assigns, and all references to County Ordinances or other regulations including future amendments.

A. AFFORDABLE HOUSING.

4.—The Applicant conducted a survey in accordance with an approved methodology to determine whether a sufficient number of affordable housing units are available to meet the demands of the projected, non-construction, permanent employees of Phase I of the Project. The survey results demonstrated there was no unmet demand through build out of Phase I.

2.—~~Prior to initiation of the second phase of the Project, the Developer must conduct a re-analysis of the affordable housing needs of the projected, non-construction, permanent employees of that phase using a methodology acceptable to the County, SWFRPC and the Florida Economic Opportunity (FDEO). The methodology must limit the percentage of mobile homes that comprise the total available supply to 20 percent.~~

3.—~~If the second phase re-analysis of the affordable housing needs shows a shortage of affordable housing units that exceeds the threshold for regionally significant impact for the DRI, the Developer must mitigate the need by following the options outlined in Rule 9J-2.048(8), the Adequate Housing Uniform Standard Rule, or other measures agreed to by the County, SWFRPC and FDEO.~~

B. ENERGY.

The Developer will utilize the energy conservation measures outlined in the ADA.

C. STORM WATER MANAGEMENT.

1. The Developer has obtained an Environmental Resource Permit (ERP) from South Florida Water Management District (SFWMD) - Permit No. 951122-7 Miromar Lakes. Prior to construction, the Developer must provide Lee County Development Services with a copy of the ERP, and any early work permit. The Developer must provide Lee County Development Services Division with a copy of all amendments to the ERP that include property that was not a part of the original application.

2. The Developer, Property Owner's Association, Uniform Community Development District (UCDD), or other entity with operational responsibility for the surface water management system must comply with Class III water quality standards for all water discharged into the lakes generally referred to as the north and south mining lakes.
3. The Developer must incorporate best management practices (BMPs) into the surface water management plans submitted to SFWMD. The Developer must also utilize BMPs during construction for control of erosion and sediment. These practices will be identified on the aforementioned plans submitted to SFWMD, and other agencies with jurisdiction.
4. The first habitable floor of all structures must be at or above the 100-year flood elevations. The 25-year/three-day storm event must be used in computing off-site discharge rates, taking into account the backwater elevations along on-site flowways.
5. The Developer must obtain a SFWMD permit for dewatering activities as required by Sections 2.5 and 5.2.2 Dewatering, Basis of Review (water use).
6. Upon completion of construction and stabilization of side slopes, the Developer must remove all silt barriers, hay bales, anchor soil, and accumulated silt.
7. The Developer must establish a legal operating entity in accordance with the SFWMD Basis of Review and Lee County Land Development Code (LDC), to maintain all internal storm water management lakes, ditches, and wetlands. The same condition applies to that portion of the north and south mining lakes under the ownership and control of the Developer. Easements, common areas or other legal mechanisms may be utilized to ensure sufficient access to the storm water management areas.
8. Where applicable, the storm water management plan submitted to SFWMD must consider measures to reduce runoff rates and volumes, including, but not limited to, fixed control structures, perforated pipes, and grass swale conveyances. The Developer must use swales rather than closed systems whenever practical.
9. The Developer must create littoral zones along the shoreline banks of the storm water management system consistent with the requirements of SFWMD and Lee County. The littoral zones must consist of native emergent or submergent aquatic vegetation. The Developer must ensure, by supplemental replanting if necessary, at least 80 percent cover by native aquatic vegetation within the required littoral zones.

10. The surface water management system design must incorporate natural flowway corridors and restore impacted natural flow way corridors.
 - (a) Storm water run-off must be pre-treated consistent with the South Florida Water Management District permit prior to discharging the run-off into existing lake or wetland (any aquatic) systems.
 - (b) The development must maintain the function and integrity of the Stewart Slough, the natural flowway being restored through the South Florida Water Management District's ERP, contained within the boundaries of this DRI. Flowways are precluded from being primary surface water treatment areas.
11. The Developer, or the legal operating entity, must perform annual inspections of the project's on-site storm water management system to ensure that the system is maintained in accordance with the final approved design.
12. The Developer must meet all Army Corps. of Engineers, Department of Environmental Protection, South Florida Water Management District, and Lee County requirements regarding the impact of the proposed storm water management system on state or federally listed plants or animal species occurring on-site. When required by federal, state, or local permits, the Developer will provide mitigation for those impacts.
13. The Developer must vacuum sweep all commercial streets and parking areas within the development on a regularly scheduled basis.
14. When required by SFWMD in accordance with Section 5.2.2, Basis of Review (E.R.P.), the Developer must provide at least one-half inch of dry pre-treatment (retention or detention), or an equivalent alternative, for commercial and industrial uses.
15. The Developer must participate in any Countywide storm water management system adopted by Lee County that directly benefits the development, under the same fiscal terms and conditions applicable to other benefitted properties.
16. As part of the routine maintenance of the project, the Developer must:
 - (a) mow grassed storm water management areas;
 - (b) remove accumulated debris within treatment areas;
 - (c) replace all identifiable erosion to banks; and

- (d) remove noxious exotic vegetation that may potentially interfere with the proper function of the treatment areas.

17. The Developer must inspect, clean and repair all under-drain systems and grease baffles on a regular basis. The period between inspections may not exceed eighteen months.

18. The storm water management system must be designed to ensure that the quality and quantity of the water entering the wetlands is adequate to ensure the wetland survivability. The impact of the storm water management system on the wetland mitigation areas will be evaluated by the SFWMD during the ERP process.

19. All individual tenants or residents must comply with applicable laws and regulations regarding the management and use of hazardous materials.

20. Golf Course:

- (a) Prior to development order approval for the first 18-hole golf course, the developer must conduct a pre-development groundwater and surface water analysis and submit the analysis to the County. This analysis is intended to establish baseline data for groundwater and surface water monitoring for the project area. The analysis must be designed to identify those nutrients and chemicals that are anticipated to be associated with the project. Prior to commencing this baseline study, the developer must submit the methodology for review, comment, and approval by the County.
- (b) The developer must submit an annual monitoring report of surface water quality on the first 18-hole golf course for a period of five years from the issuance of the certificate of completion for the golf course, or the last violation, if any, of Chapter 62-302, F.A.C. water quality standards. The monitoring program will include: testing to assess whether there are any herbicide, pesticide or fertilizer pollution of the water at the project's outfall locations, which are the south mining lake, the Stewart Cypress Slough, and the north headwaters of Estero River. The developer will submit the test results with the monitoring report. The monitoring program will be established and operated at the expense of the developer, or other comparable legal entity charged with the legal responsibility of managing the golf course. This plan will be evaluated in accordance with the directives of Chapter 62-302, F.A.C., water quality standards.
- ~~(c) The developer must conduct a pre-development ground water and surface water analysis and submit the analysis to the County prior to development order approval for the second 18-hole golf course. The analysis will establish the baseline data for groundwater and surface water~~

monitoring of the project area. The developer must design the analysis to identify the nutrients and chemicals anticipated to be associated with the second 18 hole golf course. The methodology employed in the base line study must first be reviewed and approved by the county.

- (d) The operator of the second 18 hole golf course must submit an annual monitoring report of ground water and surface water quality. The proposed monitoring program will be reviewed by the Natural Resources Division and evaluated in accordance with the requirements of Chapter 62-302 FAC water quality standards. The monitoring program must include: testing to assess whether there are unacceptable increased levels of herbicide, pesticide or fertilizer at project outfalls; identification of the locations of the ground water monitoring and project outfalls; identification of the locations of ground water monitoring and testing on a map(s); an outline of the testing and recording requirements. The operator must submit test results and the monitoring report to the Lee County Natural Resources Division. The monitoring program will be established and operated at the expense of the developer or other legal entity charged with the legal responsibility of managing the golf course. Compliance with the program will be evaluated at the project outfalls utilizing the water quality standards set forth in Chapter 62-302 F.A.C. The monitoring program will continue in perpetuity.

21. If groundwater or surface water pollution occurs, as that term is defined by the rules or regulations in effect at the time, and if the pollution is caused by the application of fertilizers, herbicides or pesticides to the golf course, the application of the pollutant must cease until there is a revised management plan for the application of the pollutant. A determination that the application of fertilizers, herbicides or pesticides to the golf course are the cause and source of the pollution must be based on competent and substantial evidence. If mitigation is necessary to address the pollution, a mitigation plan approved by Lee County and other appropriate agencies will be implemented by the developer.

D. TRANSPORTATION

1. Significant Impacts

(a) Assessment Parameters

The traffic impact assessment for the project assumes the following development parameters:

	Phase I (2004)	Buildout (2028)
Residential Single Family (ITE LUC 210)	314 D.U.	700 D.U.

Multi-Family	1,100 D.U. Total	1,900 D.U.
Total Apartments (LUC 220)	200 D.U.	200 D.U.
Residential Condominiums (LUC 230)	900 D.U.	1,700 D.U.
Non-Residential		
--Service/Office (LUC 710)	100,000 sq. ft.	340,000 sq. ft.
--General Retail (LUC 820)	160,000 sq. ft.	250,000 sq. ft.
--Hotel (LUC 310)	350 rooms	450 rooms
--Industrial/R & D (LUC 760)	0 sq. ft.	40,000 sq. ft.
--Golf Course (LUC 430)	36 holes	36 holes
--Community Use (LUC 495)	20,000 sq. ft.	20,000 sq. ft.
(Golf Clubhouse)		
--Beach Park (LUC 415)	10 acres	10 acres
(Including a Beach Clubhouse for use of residents and their guests.)		

The above parameters form the basis for the project impacts and mitigation requirements contained herein. The assumed land uses associated with the general parameters are identified by the Land Use Code (LUC) from the Institute of Transportation Engineers (ITE) Trip Generation Manual, 6th Edition. While approved zoning categories may allow a wider range of uses, from a DRI standpoint, the project impacts are based on the above parameters and assumed uses. Any significant change in the assumed uses or mix of uses will require a re-evaluation of the DRI transportation impacts. A significant change is one that would increase the external project traffic by five (5) percent or more or that would significantly change the projected distribution and assignment of project traffic, so as to result in additional significantly and adversely impacted roadway links. The overall traffic at the project entrances based on the above parameters is estimated to be 3,931 p.m. peak hour trips.

(b) Phase I Impacts

The assessment indicates that the significantly impacted roadways and intersections described below were anticipated to be operating below acceptable levels of service at the end of Phase I (2004):

<u>Roadways</u>	<u>Needed Improvement</u>
Alico Road	
--U.S. 41 to Seminole Gulf Railway	Widen to six (6) lanes*
--I-75 to Ben Hill Griffin Parkway	Widen to six (6) lanes

** or realignment/interchange as part of Metro Parkway extension (6 lanes), US 41 to Six Mile Parkway*

Intersections

Alico Road/Three Oaks Parkway	Add 2 nd NB left, 2 nd WB left, 2 nd SB left
Alico Road/Project Entrance	Intersection Improvements
Ben Hill Griffin Parkway/Alico Road	Add 2 nd NB left
Ben Hill Griffin Parkway/Project Entrances	Intersection Improvements
Ben Hill Griffin Parkway/Corkscrew Road	Signalization, add 2 nd EB left, 2 nd SB left
US 41/Alico Road	Add 2 nd WB right, 3 rd SB left

The intersection improvements include geometric improvements, such as turn lanes and signalization when warranted. The Developer will be fully responsible for improvements needed at the project entrances that are deemed site-related (See Paragraph D.4). The intersections are addressed in the overall proportionate share calculation. As noted above, however, site-related needs at the project entrances are not addressed in the proportionate share calculation.

(c) Buildout Impacts

The assessment indicated that the significantly impacted roadways and intersections described below were anticipated to be operating below acceptable levels of service at the end of buildout (2009²):

<u>Roadways</u>	<u>Needed Improvement</u>
Alico Road	
--U.S. 41 to Seminole Gulf Railway	Widen to six (6) lanes
--Lee Road to I-75	Widen to eight (8) lanes
--I-75 to Ben Hill Griffin Parkway	Widen to six (6) lanes
Ben Hill Griffin Parkway	
--T&T Entrance to Alico Road	Widen to six (6) lanes
Corkscrew Road	
--Three Oaks Parkway to Ben Hill Griffin Parkway	Widen to six (6) lanes
Daniels Parkway	
-- Metro Parkway to Six Mile Cypress Parkway	Widen to eight (8) lanes
--Six Mile Cypress Parkway to Fiddlesticks Boulevard	Widen to ten (10) lanes
--Fiddlesticks Boulevard to I-75	Widen to eight (8) lanes

² The build out date of the Miromar DRI was extended to 2020. However, the transportation analysis was conducted assuming a build out date of December 31, 2009. For this reason, the reference to 2009 was not amended in this paragraph.

U.S. 41

-- Coconut Road to Williams Road
 --Alico Road to Six Mile Cypress Parkway

Widen to six (6) lanes
 Alternate facility needed*

**Metro Parkway extension (six (6) lanes), US 41 to Six Mile Parkway*

Intersections

Alico Road/Oriole Road	Add 2 nd WB left, signalization
Alico Road/Three Oaks Parkway	Add 3 rd EB left, 3 rd NB through 3 rd SB through
Alico Road/I-75 East Ramp	Add 2 nd WB left, 2 nd NB left
Alico Road/Project Entrance	Intersection Improvements
Ben Hill Griffin Parkway/Alico Road	Add 3 rd NB left, 3 rd SB through, 3 rd WB through, 2 nd EB left
Ben Hill Griffin Parkway/Project Entrances	Intersection Improvements
Ben Hill Griffin Parkway/Corkscrew Road	Add 2 nd EB left, 2 nd NB left, 2 nd SB left
Corkscrew Road/Three Oaks Parkway	Add 2 nd EB left
US 41/Alico Road	Add 3 rd SB left

The intersection improvements include geometric improvements, such as turn lanes and signalization when warranted. The Developer will be fully responsible for improvements needed at the project entrances that are deemed site-related (see Paragraph D.4). The intersections are addressed in the overall proportionate share calculation. As noted above, however, site-related needs at the project entrances are not addressed in the proportionate share calculation.

The amended traffic assessment conducted for the Fifth Amendment to the development order indicated that the significantly impacted roadways described below will be operating below acceptable levels of service at the end of buildout in 2028.

<u>Roadways</u>	<u>Needed Improvement</u>
Ben Hill Griffin Parkway -- Miromar Lakes Entrance to College Club Drive	Widen to six (6) lanes

2. Mitigation(a) Phase I Proportionate Share

The total proportionate share obligation to mitigate the Phase I transportation impacts on the non site-related roads and intersections set

forth in Paragraph D.1.b. above is estimated to be \$1,270,796 in 1999 dollars. The Phase I road impact fees anticipated to be generated by the project based on the development parameters set forth in Paragraph D.1.a and under the current County road impact fee schedules are \$3,171,928, or \$1,901,132 more than the Phase I proportionate share obligation.

(b) Buildout Proportionate Share

The total proportionate share obligation to mitigate the build out transportation impacts on the non-site related roads and intersections set forth in Paragraph D.1.c. above is estimated to be \$10,914,866 in 1999 dollars. The total road impact fees anticipated to be generated by the project through buildout based on the development parameters set forth in Paragraph D.1.a. and under the current County road impact fee schedules are \$5,686,010. The proportionate share obligation is approximately \$5,228,856 more than impact fees in 1999 dollars.

(c) Traffic Mitigation

The Developer must mitigate its overall project traffic impacts through the payment of the entire project proportionate share obligation of \$10,914,866 for project buildout. The details of this payment must be established in a Local Government Development Agreement executed pursuant to Section 163.3220, Florida Statutes, and Chapter 2, Article III of the Lee County Land Development Code. The Developer must submit to Lee County a Development Agreement within 90 days of the effective date of this DRI Development Order.

Generally, the payment is to be accomplished in the following manner:

Within 120 days of the effective date of this DRI Development Order, the Developer must deliver as Maker a promissory note, payable to Lee County, in the original principal amount of \$10,914,866.00, representing the entire proportionate share obligation. The note will provide for payment of the entire amount to be paid the County before December 30, 2005. Additionally, the note must provide for interest to be paid at a rate of 7.4 percent on the unpaid balance of the proportionate share assessment.

The promissory note will provide for payments of principal as follows:

The first principal installment will be in the amount of the Phase I impact fee obligation, \$3,171,928.00, and will be due and payable on or before the earlier of one year from the date of final DRI Development Order approval or the date of the issuance of the first building permit for vertical

construction. However, some development such as the golf course, golf clubhouse, information/sales center/model center, and beach club may proceed prior to the first payment. That development will be required to pay road impact fees at the time permits are received. Impact fee payments will be deducted from the first principal payment;

The second principal installment in the amount of \$6,000,000.00, will be due and payable on December 30, 2002;

The final payment of principal in the amount of \$1,742,938.00, will be due and payable December 30, 2005.

Interest will be payable on December 30th of each year beginning December 30, 2000 and continuing until the promissory note is paid in full. Upon payment of the six million dollar principal payment prior to December 30, 2002, the 2002 interest payment will be based on the remaining principal balance of \$1,742,938.00. Each payment will be in the amount of all accrued and unpaid interest to the date thereof. Except for the year 2002, the amount of interest accrued will be based on the daily principal balance outstanding during the preceding year. The applicable interest rate will be equal to 7.4 percent. Interest payments are due and owing on December 30th of each calendar year. All prepayments of principal shall be credited to the next installment(s) due. All interest payments will be deposited in the District 3 impact fee account.

The Developer may choose to provide certain improvements such as the right-of-way for Koreshan Boulevard Extension along the south property line for Miromar Lakes or the six-laning of Ben Hill Griffin Parkway in exchange for credits against the overall payment obligation. These improvements are subject to concurrence by Lee County DOT on their scope and timing, and the contributions will be treated as prepayments of principal. Dedication of the Koreshan Boulevard Extension right-of-way will be valued consistent with the provisions of the Lee County Land Development Code, based on the date prior to DRI Development Order approval.

The portion of the payment in lieu of impact fees, estimated at \$5,686,010.00, will be treated as impact fees as outlined in the Lee County Land Development Code and deposited in the District 3 impact fee account. Cash payments above and beyond those in lieu of impact fees will be applied by Lee County toward the following improvements and in the following priority:

The list of significantly and adversely impacted roads and intersections from Paragraphs D.1.b and D.1.c.

Other non-site related roadway improvements benefitting Miromar Lakes.

(d) Concurrency

1. If the development agreement and promissory note specified in Paragraph D.2.c. above are provided as described and in the time frames noted, the Miromar Lakes DRI will be granted a concurrency certificate for buildout of the project, that is, the certificate will be valid until the project completes the buildout development parameters specified in Paragraph D.1.a. or December 31, 2028, whichever is sooner. Thereafter, further development of the project will be subject to the Concurrency Management System, unless the concurrency certificate is extended as provided in Condition D.2.d.2 below. Under the payment schedules identified above, the Developer will not be required to pay road impact fees at the building permit stage, except as previously noted for that limited development that may occur prior to the first payment. If the payments are not made as described, then no further building permits will be issued until the Developer makes the payment. Concurrency vesting is contingent on the payment schedule and amounts set forth in Paragraph D.2.c. The proportionate share required herein was paid in full and the project will not lose its vested status and will not be subject to the County's Concurrency Management System for all future development as long as the development is constructed within the adopted development parameters. The Developer will have a 15 day grace period following the due date for each payment within which to make the required payment without affecting the concurrency vesting.
2. In 2010, the developer filed a Notice of Proposed Change that resulted in a fifth amendment to the DRI development, which permitted an extension of the project buildout to December 31, 2020, extended the concurrency certificate in Condition II.D.2.d.1. above to December 31, 2020, and provided a detailed traffic assessment to the Lee County Department of Transportation for review and approval.

If the developer files a Notice of Proposed Change that results in an extension of project build out beyond December 31, 2024 and the developer desires to extend the concurrency certificate in Condition D.2.d.1. above beyond 2024, the developer must provide a detailed traffic assessment to Lee County DOT for review and approval. The assessment must include, but not limited to, identifying the adjusted phasing, level of development anticipated for the revised

phasing, estimated traffic impacts, needed improvements, and the project's proportionate share of those improvements.

The assessment will be a cumulative analysis of the project's traffic impacts. The County will provide credit against the recalculated proportionate share for all mitigation paid through the date of the new traffic assessment. The proportionate share payments previously made by the Developer will be adjusted to then current year dollars. This will be accomplished by increasing the principal amount paid by an amount equal to the increase as determined in the State Highway Bid Index for the State of Florida, published in the Engineering News Record. This increase will be expressed as a percentage and will be measured from the index published for the second quarter of 1999 to the index published in the then latest available edition. In no event may the adjustment result in a refund of money paid to the County. The assessment must identify mitigation for those roadway segments that are significantly and adversely impacted by cumulative project traffic at the extended build-out year in accordance with the Transportation Uniform Standard Rule in the Florida Administrative Code. Prior to conducting a reassessment analysis, the developer must attend a transportation methodology meeting with the County, and other review agencies as necessary, to establish the appropriate methodology.

The traffic assessment will be prepared by the developer following generally acceptable transportation planning procedures consistent with the standards in effect at the time. Additional mitigation, if any, resulting from the traffic assessment must be paid in a manner generally consistent with that of the original mitigation. For example, the development order and any corresponding development agreement must be amended to reflect the revised phasing and additional mitigation.

3. Amendments to Phasing Schedule

If the project phasing is expanded in the future, the phases must be limited to not more than five-year intervals and a new analysis will be required at the start of each phase.

4. Access and Site-Related Improvements

The Developer is fully responsible for its share of the following site-related roadway and intersection improvements: all intersection improvements, including signalization, turn lanes, deceleration

lanes, and other improvements deemed necessary by the County Engineer and consistent with the Lee County Land Development Code for the project's access points onto Alico Road and Ben Hill Griffin Parkway. Site-related improvements are not eligible for credit against impact fees and are also ineligible for offset against the project's proportionate share obligation.

5. Biennial Transportation Monitoring Report

(a) Design of Monitoring Program

The transportation monitoring program will be designed in cooperation with the Lee County Department of Transportation, the Florida Department of Transportation (FDOT), the Southwest Florida Regional Planning Council (SWFRPC), and the Florida Department of Economic Opportunity (FDEO) prior to submittal of the first report. The methodology of the biennial transportation monitoring report may be revised if agreed upon by all parties.

(b) Submittal of Monitoring Report

The Developer must submit a biennial transportation monitoring report to the following entities for review and approval: Lee County Department of Transportation, FDOT, FDEO, and SWFRPC. Additionally, the Developer must provide a copy of the report to Florida Gulf Coast University (FGCU). The first monitoring report will be submitted one year after the effective date of the DRI Development Order. The Developer must provide written notice to the above review agencies if he concludes that a traffic monitoring report is not required because no traffic impacts have been created. Once an biennial transportation monitoring report has been submitted, a report must be submitted biennially thereafter until project buildout, whether actual or declared.

(c) Minimum Requirements for Report Contents

At a minimum, the monitoring report will measure the project's actual external roadway impacts and the level of service conditions on the impacted roads and intersections, and determine the timing for needed improvements. The biennial traffic monitoring report must also contain the following information:

- 1) P.M. peak hour traffic counts with turning movements at the project's access points onto Alico Road and Ben Hill Griffin Parkway, and on the external road segments and intersections identified in Paragraph D.1.c.
- 2) A comparison of field measured project traffic volumes to the project trip generation assumed in the DRI analysis. The Developer will need to specify in the methodology how the internal interaction will be measured.
- 3) Estimated existing levels of service and needed improvements for the roads and intersections specified in Paragraph D.1.c. above.
- 4) Estimated future levels of service and needed improvements for the roads and intersections specified in Paragraph D.1.c. above, based on a one-year projection of future volumes.
- 5) A summary of the status of road improvements assumed to be committed by Lee County and FDOT as set forth below:

<u>Roadways</u>	<u>Improvement</u>	<u>Construction Schedule</u>
Alico Road		
--US 41 to Seminole Gulf Railway	four (4) lanes	FY 98/99
--Seminole Gulf Railway to I-75 West Ramps	six (6) lanes	FY 98/99
Corkscrew Road		
--Sandy Lane to I-75	four (4) lanes	FY 98/99
Three Oaks Parkway		
--Alico Road to Daniels Parkway	four (4) lanes	FY 00/01
Treeline Avenue		
--Alico Road to Daniels Parkway	four (4) lanes	FY 01/02
US 41		
--Alico Road to Daniels Parkway	four (4) lanes	FY 98/99

<u>Intersections</u>	<u>Improvement</u>	<u>Construction Schedule</u>
I-75 Ramps/Alico Road	Signalization	FY 98/99

(d) Implications

- 1) If the biennial transportation monitoring report reveals that the project trip generation exceeds the thresholds identified in 380.06(19)(b)15, Florida Statutes, then the statutory provisions regarding substantial deviations will govern. If the project is deemed to be a substantial deviation, the Developer must then undergo additional DRI review. This review must reanalyze the project impacts on the County road network in general, and specifically evaluate the potential project impacts on the roadway segments identified in Paragraph D.3 above.
- 2) Changes to development parameters or phasing may trigger the need to rebut the statutory presumption of substantial deviation. In some instances, the evidence necessary to rebut the presumption may involve the need for a comparison of project trip distribution and assignment.

6. Other

(a) Access to FGCU

The Developer has accommodated a second access to FGCU that connects to Ben Hill Griffin Parkway at STA 916+43.75, as contemplated in the FGCU Master Plan.

In addition, the Developer has accommodated two additional accesses to the FGCU campus from: 1) the southern project entrance off Ben Hill Griffin Parkway; and 2) the east boundary of the project as reflected on the DRI Master Plan (Map H) dated 02-14-2014.

(b) Access Locations and Movements

- 4) The transportation assessment was based on the access locations and movements identified in the DRI Master Plan (Map H) dated 12/23/09, printed by Miromar Development Corporation. Additional accesses may require further analysis by the Lee County Department of Transportation for the DRI.

- 2) ~~Access to the Estero Parkway will be subject to the access management plan for the roadway proposed in conjunction with the design. Median openings were determined as part of the roadway design process as well.~~

(c) Pedestrian/Bicycle and Transit Facilities

The Developer will provide for pedestrian and bicycle facilities and bus stop locations in accordance with the attached Exhibit D.

(d) Access to Future 951

Future access to County Road 951 will be subject to the recommendations set forth in the PD&E for the roadway.

7. Land Use Conversion

The approved parameters, as specified in this Development Order, may be modified by the Developer without further amendment to this Development Order, subject to the conditions of Paragraph D.1.a. and as set forth below.

- (a) ~~No more than 700 single-family units will be built at Miromar Lakes. Given that single-family units generate more total and external traffic than multi-family and, therefore, have a greater traffic impact, single-family units may be converted to multi-family units at a one-to-one (1:1) ratio. Single Family units can be converted to multi-family units, and multi-family units can be converted to single-family units and any type of multi-family unit and other unit types permitted under the zoning can be constructed as long as the conversion of residential unit types does not result in a significant change as that term is defined in paragraph D.1.a. The current ITE manual will be used to determine whether or not there is 5% or less increase in net new external p.m. trips. This conversion may occur without further DRI or substantial deviation review.~~
- (b) ~~Residential condominium units may be converted to apartment units at a ratio of 1.15 residential condominium units to one apartment unit. However, no more than 700 residential condominium units may be converted to apartment units. This conversion may occur without further DRI or substantial deviation review.~~
- (eb) Office use may be converted to Research and Development (R&D) at a ratio of 1,000 square feet of Office to 1,100 square feet of Research and Development, unless the current ITE manual would require an adjustment to the conversion rate set forth herein. There is no limitation on the conversion of Office use to Research and Development (R&D) at the

above ratio.

- (dc) ~~Notice of any conversion must be provided to the County, the Regional Planning Council, and the Department of Economic Opportunity. In addition, t~~The amount of conversion must be reported as part of the subsequent biennialannual monitoring reports to the Southwest Florida Regional Planning Council, and the Department of Economic Opportunity.

8. Golf Cart Crossing

- (a) Any golf cart crossing of Ben Hill Griffin Parkway by the Miromar Lakes DRI must be grade-separated. At-grade golf cart crossings of Ben Hill Griffin Parkway are prohibited. The golf cart crossing must be elevated over Ben Hill Griffin Parkway.
- (b) The elevated golf cart crossing of Ben Hill Griffin Parkway was reviewed and approved by Lee County DOT. The review included issues such as structural requirements and adequate sight distances for Ben Hill Griffin Parkway. The Developer obtained a right-of-way permit from Lee County DOT and agreed to adequately maintain the structure within the right-of-way.

E. VEGETATION AND WILDLIFE/WETLANDS.

1. Where feasible and appropriate for bird usage, storm water management lakes must include draw-down pool features in littoral shelf slopes. These features will be reviewed as part of the ERP permit and will be considered because they favor use by wood storks and wading birds.
2. Identifiable impacts to the Florida panther habitat will be addressed through the Army Corps. of Engineers (ACOE) permitting process. The ACOE is consulting with U.S. Fish and Wildlife (USFWS) Service as part of the Section 7 consultation under the Endangered Species Act. The ACOE will evaluate, through the permitting process, the impacts to the Florida panther. The impact must be assessed in accordance with Section 404 Federal Register and Section 7 of the Endangered Species Act.

The panther mitigation for buildout of the development, as depicted on Map H, has been identified in the ACOE Permit #199507483 (IP-MN) and SAJ1995-07483 (IP-MN) Addition and South Florida Water Management District (SFWMD) Environmental Resource Permit (ERP) No. 36-03568-P, as modified. The 12.65 Panther Island Mitigation credits have been transferred and 548.0 acres (194.0 and 353.0 acre parcels) of off-site land for panther mitigation has been acquired by the applicant. The 353-acre parcel must be accepted by appropriate agencies and conservation

easements as per ACOE and SFWMD permit condition requirements must be recorded over the 194.0 and 353.0 acre parcels.

3. The Big Cypress Fox Squirrel Management Plan, dated July 2, 1998, must be amended to:
 - (a) address the quantity and quality of the Big Cypress Fox Squirrel habitat to be protected, and
 - (b) to identify the entity that will be responsible for the perpetual maintenance of the habitat.

The afore-stated amendments to the Big Cypress Fox Squirrel Management Plan are subject to review and approval by Lee County, FDEO, and SWFRPC. Once approved, the management plan must be incorporated into this DRI Development Order. (9J-2.041 FAC)

4. ~~The Developer must obtain an incidental take permit or off-site relocation permit from the Florida Game and Fresh Water Fish and Wildlife Conservation Commission (FGFWFC FWC) for gopher tortoises. If the Developer obtains an incidental take permit, tortoises and commensal species must be located out of harm's way to appropriate upland locations. The Developer will relocate tortoises to appropriate on-site upland preserves. Regardless of the type of permit obtained from the FGFWFC, a minimum of 3.0 acres of upland habitat appropriate for gopher tortoises will be preserved south of Stewart Cypress Slough between Ben Hill Griffin Parkway and the approximate 156-acre wetland/upland conservation area.~~
5. Where appropriate, the Developer must design internal roads that cross the Stewart Cypress and other strand areas to accommodate wildlife crossings of appropriate size for use by Florida panther and Florida black bear. Such size and design must correspond to the size and design set out in Condition 24 18 to the MPD.
6. Seventy-five (75) percent of the total number of required trees used in buffers and landscaping must be indigenous native varieties. Fifty percent (50%) of the total number of required shrubs used in buffers and landscaping must be indigenous native varieties. Where practicable, ecologically viable existing native vegetation should be incorporated into the landscape design. Xeriscaped landscape areas should not be irrigated after the initial start-up period, unless weather conditions and the survival of the areas require otherwise. Category 1 invasive exotic vegetation listed by the Florida Pest Plant Council may not be used for landscaping

south of the main branch of the Stewart Cypress Slough (see Exhibit F attached hereto), except that Ficus benjaminia trees are permitted only along Ben Hill Griffin Parkway to screen the residential community and to carry forward the existing landscaping theme of the northern and western portions of the DRI.

7. The following management guidelines must be implemented to further reduce the potential for ground and surface water impacts from the golf course:
 - (a) The course must be planted with a turf grass cultivated variety having drought and pest resistant qualities and requiring relatively low fertilizer use;
 - (b) The irrigation system should operate on an "as needed" basis by the utilization of weather forecasting and ongoing assessment of the moisture content of the soil. It is not the intent of this provision to require the purchase or installation of high technology weather forecasting or rain monitoring equipment.
 - (c) Fertilizers with a low leaching potential (slow release) must be used whenever possible. Fertilizers may not be applied after active growth of the turf grass has ceased. Application rates must be kept to the lowest reasonable levels;
 - (d) To reduce sources of pollutants, especially nutrients and pesticides associated with the golf course, the golf course manager must implement a chemicals management plan which includes an integrated pest management (IPM) program and a nutrient management program so that nutrients and pesticides are used only when absolutely necessary and only in the most conservative manner through minimal species-specific applications. The nutrient management program must include the use of soil tests to determine needed applications of nutrients. Only EPA-approved chemicals are permitted. Turf managed areas (including fairways, tees, and greens) are prohibited within 35 feet of the Conservation Areas (CO) shown on the Master Concept Plan for Miromar Lakes.
 - (e) The golf course manager will coordinate the application of pesticides with the irrigation practices (the timing and application rates of irrigation water) to reduce runoff and the leaching of any applied pesticides and nutrients.
 - (f) The Developer must employ a golf course manager licensed by the state to use restricted pesticides and experienced in the

principles of IPM. The golf course manager will be responsible for ensuring that the golf course fertilizers are selected and applied to minimize fertilizer runoff into the surface water and the leaching of those same fertilizers into the groundwater.

- (g) The storage, mixing, and loading of fertilizer and pesticides will be designed to prevent/minimize the pollution of the natural environment. The golf course must comply with the publication "Best Management Practices for Golf Course Maintenance Departments, May 1995" published by the Florida Department of Environmental Protection.

8. Golf Cart Crossing

- (a) Golf course crossing of the Stewart Cypress Slough must be grade-separated. At grade golf cart crossings of this Slough are prohibited.
- (b) At the time of final plan approval, all proposed elevated golf cart crossings of the Slough must be reviewed and approved by the Lee County Division of Environmental Sciences. The review will include, but is not limited to, the structural requirements of the crossing and function of the Slough.

- 9. The wetland mitigation for buildout of the development, as depicted on Map H, has been identified in the ACOE Permit #199507483 (IP-MN) and SAJ1995-07483 (IP-MN), and SFWMD ERP No. 36-03568-P, as modified. In addition to mitigation as discussed in Condition II.E.2., requirements include a minimum of 354.0 acres of on-site wetland and upland preservation, restoration and enhancement in substantial compliance with the areas delineated as conservation areas (CO) on Map H. If modifications to Map H are proposed to include additional land and/or impacts to required conservation areas, then jurisdictional agency review is required. Should additional land be added to the DRI, the impacts to wetlands on the additional lands will be reviewed in accordance with the laws in effect at that time. The inclusion of additional land will not subject the wetland mitigation identified in ACOE Permit #199507483 (IP-MN) and SAJ1995-07483 (IP-MN) to additional review or changes unless the applicant proposes changes to the wetland impacts and/or the required wetland mitigation.

F. WASTEWATER MANAGEMENT/WATER SUPPLY.

- 1. The project must incorporate water conserving devices or methods, including low volume water use plumbing fixtures, self-closing or metered

water faucets. The water conserving devices must meet the criteria outlined in the water conservation plan of the public water supply permit issued to Gulf Environmental Services (GES) by SFWMD.

2. The Developer must obtain Water Use Permits for water withdrawals for landscape irrigation. Permits may only be issued for applications that meet the SFWMD criteria in effect at the time of permitting. Permits must be received prior to construction of the irrigation system.
3. Prior to the commencement of construction, plans and specifications for the water and wastewater collection system must be reviewed by Gulf Environmental Services, in accordance with their adopted rules and regulations.
4. The Developer must design potable water facilities in accordance with the Lee County Land Development Code (LDC). The LDC will also govern the applicable design for domestic and fire flow.
5. The Developer must comply with the LDC provisions that require the availability of adequate water and wastewater at the time of local final Development Order approval. Potable water, wastewater collection and treatment, and eventually non potable water must be obtained from Gulf Environmental Services. If GES is unable to provide the service, the Developer must construct interim potable water and wastewater treatment facilities, or postpone development until GES has sufficient capacity. Interim facilities must be constructed to LDC standards, and must be dismantled at the Developer's expense upon connection to GES facilities.
6. If the Developer utilizes treated effluent for irrigation, the Developer must buffer the on-site lakes, preserved wetlands, and storm water management system from possible effluent contamination in accordance with applicable SFWMD regulations.
7. Temporary septic systems may be used in conjunction with the construction office, sales offices, and model homes. Temporary septic systems must be properly abandoned and removed by a licensed septic system firm when permanent or interim wastewater treatment facilities are operational. Permanent septic systems are permitted for golf course restrooms. All other septic systems are prohibited.
8. The Developer must use the lowest quality of water available and acceptable for all non-potable water uses. Potable water may not be utilized for non-potable uses if adequate and acceptable non-potable water is readily available.

G. COMPREHENSIVE PLAN CONSISTENCY.

1. Lee County may not issue a local Development Order unless the Development Order is consistent with the County's Comprehensive Plan, Land Development Code, University Window Overlay, Ben Hill Griffin Parkway Access Management Plan, and Concurrency Management System.
2. ~~Given the 114 acres~~ The proposed for commercial development, the project is limited to no more than 1,140,000 square feet of commercial retail, office, hotel, and research and development uses. This includes commercial located within property designated as C1, C-S, and MU on Map H. All commercial ancillary uses are included in this limitation; no residential or recreational ancillary uses or parking structures serving commercial or residential development are included in this amount. ~~All building area must be included in this calculation to show compliance with this limitation.~~ If multiple local development orders are requested, it is the developer's responsibility to provide a cumulative total of square footage from previous development order approvals prior to the issuance of the requested local development order.
3. ~~The requested 340,000 square feet of office use may be converted to research and development use on a one square foot to 1.1 square foot ratio.~~

H. FIRE.

1. The Developer must address its fire and emergency services impacts through the payment of impact fees in accordance with the schedule set forth in the Lee County Land Development Code.
2. When required by Superfund Amendments Reauthorization Act (SARA) Title III, and the Florida Hazardous Materials Emergency Response and Community Right to Know Act of 1988, the Developer must file hazardous materials reports and updates.

I. AIRPORT NOISE ZONE.

~~Residential development is prohibited within all areas designated as Airport Noise Zone 3. However, this does not preclude the development of time-share units in conjunction with a bona-fide hotel use, provided the time-share units do not comprise more than 25 percent of the total approved hotel rooms. In such an instance, time-share units are not deemed to be a residential use.~~

III. LEGAL EFFECT AND LIMITATIONS OF THIS DEVELOPMENT ORDER AND ADMINISTRATIVE REQUIREMENTS.

- A. Resolution. This Development Order constitutes a resolution of Lee County adopted by the Board of County Commissioners in response to the DRI ADA filed for Miromar Lakes DRI.
- B. Additional Developer Commitments. All commitments and impact mitigating actions volunteered by the Developer in the ADA and supplementary documents that are not in conflict with conditions or stipulations specifically enumerated above are incorporated by reference into this Development Order. These documents include, *but are not limited to the following*:
1. The Alico AMDA filed September 13, 1990, as amended by The Miromar Lakes Development of Regional Impact ADA sufficiency response filed November 10, 1997.
 2. The Miromar Lakes DRI sufficiency responses, stamped received on:
 - January 16, 1991
 - April 2, 1991
 - July 10, 1991
 - November 17, 1997
 - March 27, 1998
 - July 6, 1998
 3. The Miromar Lakes Notice of Proposed Change as amended by subsequent submittals.
- C. Master Plan of Development. Map H, dated ~~September 19, 2014~~ February 14, 2014, is attached hereto as Exhibit C, and is incorporated by reference. The Developer may modify the boundaries of development areas and the location of internal roadways to accommodate topography, vegetation, market conditions, traffic circulation, or other site related conditions as long as the modification meets local development regulations. However, this provision may not be used to reduce the size of wetland preserve areas. Precise wetland boundaries will be determined by the South Florida Water Management District, as delegated by the Department of Environmental Protection and the Army Corps. of Engineers.
- D. Binding Effect. This Development Order is binding upon the Developer(s), and its assignees or successors in interest. Where the Development Order refers to lot owners, business owners or other specific references, those provisions are binding on the entities or individuals referenced. Those portions of this Development Order that clearly apply only to the project Developer are binding upon any builder/Developer who acquires a tract or parcel of land within the DRI.

The Developer may impose or pass on the requirements of this DRI DO to ultimate purchasers through covenants that run with the land.

- E. Reliance. The terms and conditions and phasing schedule set out in this Development Order constitute a basis upon which the Developer and the County may rely in future actions necessary to fully implement the final development contemplated by this Development Order. The development parameters and phasing schedule upon which this Development Order approval is based is set forth in Exhibit B. Changes to the development mix or phasing schedule may require a reanalysis of project impacts in order to rebut a presumption of substantial deviation.
- F. Enforcement. All conditions, restrictions, stipulations and safeguards contained in this Development Order may be enforced by either party by action at law or equity. The cost of those proceedings, including reasonable attorney's fees, will be paid by the defaulting party.
- G. Successor Agencies. References to governmental agencies will be construed to mean future instrumentalities that may be created and designated as successors in interest to, or which otherwise possess the powers and duties of the referenced governmental agencies in existence on the effective date of this Development Order.
- H. Severability. If any portion or section of this Development Order is determined to be invalid, illegal or unconstitutional by a court of competent jurisdiction, that decision will not affect the remaining portions or sections of the Development Order, which will remain in full force and effect.
- I. Applicability of Regulations. This Development Order does not negate the Developer's responsibility to comply with federal, state, regional and local regulations.
- J. Further Review. Subsequent requests for local development permits do not require further DRI review pursuant to Section 380.06, Florida Statutes. However, upon a finding by the Board that any of the following conditions exist, the Board must order a termination of all development activity in that portion of the development affected by the substantial deviation until a DRI Application for Development Approval, Notice of Substantial Deviation or Notice of Proposed Change has been submitted, reviewed and approved in accordance with Section 380.06, Florida Statutes.
 - 1. There is a substantial deviation from the terms or conditions of this Development Order or other changes to the approved development plans that create a reasonable likelihood of adverse regional impacts or other regional impacts that have not been evaluated in the review by the

Regional Planning Council; or

2. Expiration of the period of effectiveness of the Development Order. Any request to extend the effectiveness of this Development Order will be evaluated based on the criteria for the extension of the buildout date set forth in Section 380.06(19), Florida Statutes.
 3. Conditions in the development order that specify circumstances in which the development will be required to undergo additional DRI review. See 9J-2.025(10).
- K. Commencement of Physical Development. Substantial physical development of the project occurred no later than December 31, 2000. Further development must occur in accordance with the development parameters and phasing schedule set forth in Exhibit B.
- L. Buildout and Termination Dates. The project has a buildout date of ~~December 31, 2024~~ April 3, 2028, and a termination date of ~~December 31, 2030~~ April 3, 2033. No permits for development will be issued by the County subsequent to the termination date or expiration date unless the conditions set forth in Section 380.06(15)(g) are applicable.
- M. Assurance of Compliance. The administrative director of the Lee County Department of Community Development, or their designee, will be the local official responsible for assuring compliance with this Development Order. Lee County is primarily responsible for monitoring the development and enforcing the provisions of the development order. No permits or approvals will be issued if the developer fails to act in substantial compliance with the development order.
- N. Credits Against Local Impact Fees. Pursuant to Chapter 380.06(16), the Developer may be eligible for credits for contributions, construction, expansion, or acquisition of public facilities, if the Developer is also subject by local ordinances to impact fees or exactions to meet the same needs. However, no credit will be provided for internal on-site facilities required by County regulations or to any off-site facilities to the extent those facilities are necessary to provide safe and adequate services to the development.
- O. Protection of Development Rights. Assuming the project can comply with the County's Concurrency Management Program at the time development permits are requested, the project will not be subject to down-zoning, unit density reduction, intensity reduction or prohibition of development until December 30, 2026~~30~~. If the County demonstrates at a public hearing that substantial changes have occurred in the conditions underlying the approval of this Development Order, or finds that the Development Order was based on substantially inaccurate information provided by the Developer, or that the change is clearly established

by Lee County to be essential to public health, safety and welfare, then down-zoning unit density reduction or prohibition of development may occur. [See 9J-2.025(3)(b)13]

- P. Biennial Reports. The Developer must submit a report biennially to the Lee County Department of Community Development, the SWFRPC and Florida DEO on Form RPM-BSP-Annual Report-1. The content of the biennial report must include the information set forth in Exhibit E, and must also be consistent with the rules of the FDCA. The first monitoring report must be submitted to the DRI coordinator for SWFRPC, FDEO, and Lee County not later than one year after the effective date of this Development Order. Further reporting must be submitted not later than two years from the previously submitted report, until buildout, whether actual or declared. Failure to comply with this biennial reporting procedure is governed by Section 380.06(18), Florida Statutes, which provides for the temporary suspension of the DRI Development Order.

The Developer must file the biennial monitoring reports until actual or declared buildout of the project. Miromar Lakes, L.L.C., is the party responsible for filing the biennial monitoring reports until one or more successor entities are named in the development order. The Developer must inform successors in title to the undeveloped portion of the real property covered by this Development Order of the biennial reporting requirement. Tenants or owners of individual lots or units have no obligation to comply with this reporting condition.

The Developer must also submit a transportation biennial report in accordance with the provisions set forth in Section II.D. of this development order.

- Q. Community Development District. The Developer elected to petition for the formation of a Uniform Community Development District to serve all or a portion of the project pursuant to Florida Statutes Chapter 190, as it may be in effect from time to time. Lee County hereby gives its approval that any such district may undertake the construction and/or funding of all or any of the mitigation and public infrastructure projects for which the Developer is responsible under the terms of this development order, whether within or without the boundaries of the district, and including the payment of mitigation amounts provided for in this development order, as a co-obligor hereunder. This provision shall not be construed to require the approval of any petition to form such a district, and in no event shall the Developer be released from its obligations under this Development Order.
- R. Transmittal and Effective Date. The County will forward certified copies of this Development Order to the SWFRPC, the Developer, and appropriate state agencies. This Development Order is rendered as of the date of that transmittal. In accordance with the requirements of Section 380.06(15)(f), Florida Statutes, once this development order is effective, the Developer must record notice of its

adoption in the office of the Clerk of the Circuit Court of Lee County. The FDEO and the SWFRPC offered no objections within 45 days after the application was submitted, and therefore have no ability to appeal the amended DRI DO.


Commissioner Hamman made a motion to adopt the Eighth Development Order Amendment, seconded by Commissioner Manning. The vote was as follows:


John E. Manning	Aye
Cecil L Pendergrass	Absent
Larry Kiker	Aye
Brian Hamman	Aye
Frank Mann	Aye

DULY PASSED AND ADOPTED this 18th day of June, 2014.


ATTEST:
Linda Doggett, Clerk


BOARD OF COUNTY COMMISSIONERS
LEE COUNTY, FLORIDA


Deputy Clerk

By: 
Larry Kiker, Chair

Approved as to Form for the Reliance
of Lee County Only

By: 
County Attorney's Office



Exhibits:

- A. Legal Description (1,793.646 +/- acres)
- B. Development Parameters and Phasing Schedule
- C. Map H dated ~~September 19, 2011~~ February 14, 2014
- D. Pedestrian and Bicycle Facilities and Bus Stop Locations
- E. Biennial Monitoring Report Requirements
- F. Invasive exotic vegetation listed by Florida Pest Plant Council



950 Encore Way • P.O. Box 111629 • Naples, Florida 34108 • Phone: 239.254.2000 • Fax: 239.254.2098

HM PROJECT #2000106X
7/25/2011
REF. DWG. #A-1583-1
PAGE 2 OF 2

LEGAL DESCRIPTION:

A PARCEL OF LAND LOCATED IN A PORTION OF SECTIONS 10, 11, 14, 15 AND 23, TOWNSHIP 46 SOUTH, RANGE 25 EAST, LEE COUNTY, FLORIDA, BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

COMMENCE AT SOUTHEAST CORNER OF SECTION 23, TOWNSHIP 46 SOUTH, RANGE 25 EAST, LEE COUNTY, FLORIDA; THENCE RUN N.89°44'39"W., ALONG THE SOUTH LINE OF SAID SECTION 23, FOR A DISTANCE OF 651.54 FEET TO A POINT ON THE WESTERLY RIGHT-OF-WAY LINE OF BEN HILL GRIFFIN PARKWAY (A.K.A. TREELINE DRIVE), A 150.00 FOOT WIDE RIGHT-OF-WAY, RECORDED IN O.R. BOOK 2745, PAGES 1550 THROUGH 1554 OF THE PUBLIC RECORDS OF LEE COUNTY, FLORIDA AND TO THE POINT OF BEGINNING OF THE PARCEL OF LAND HEREIN DESCRIBED; THENCE CONTINUE N.89°44'39"W. ALONG THE SOUTH LINE OF SAID SECTION 23, FOR A DISTANCE OF 2,921.79 FEET TO A POINT ON THE EASTERLY RIGHT-OF-WAY LINE OF INTERSTATE 75; THENCE RUN N.18°17'51"W. ALONG THE EASTERLY RIGHT-OF-WAY LINE OF INTERSTATE 75, FOR A DISTANCE OF 955.62 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE EASTERLY; THENCE RUN NORTHERLY ALONG THE EASTERLY RIGHT-OF-WAY LINE OF INTERSTATE 75 AND ALONG THE ARC OF SAID CURVE TO THE RIGHT, HAVING A RADIUS OF 17,026.80 FEET, THROUGH A CENTRAL ANGLE OF 04°04'42", SUBTENDED BY A CHORD OF 1,211.72 FEET AT A BEARING OF N.16°15'30"W., FOR A DISTANCE OF 1,211.97 FEET TO THE END OF SAID CURVE; THENCE RUN N.14°13'09"W. ALONG THE EASTERLY RIGHT-OF-WAY LINE OF INTERSTATE 75, FOR A DISTANCE OF 9,126.68 FEET; THENCE RUN N.76°08'54"E., FOR A DISTANCE OF 527.61 FEET; THENCE RUN N.79°14'37"E., FOR A DISTANCE OF 501.77 FEET; THENCE RUN N.84°36'26"E., FOR A DISTANCE OF 384.54 FEET; THENCE RUN S.85°27'53"E., FOR A DISTANCE OF 381.51 FEET; THENCE RUN S.74°31'06"E., FOR A DISTANCE OF 209.92 FEET TO A POINT ON THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY AND A POINT ON A CIRCULAR CURVE, CONCAVE EASTERLY, WHOSE RADIUS POINT BEARS S.69°47'11"E., A DISTANCE OF 3,075.00 FEET THEREFROM; THENCE RUN SOUTHERLY ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY AND ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 3,075.00 FEET, THROUGH A CENTRAL ANGLE OF 23°44'14", SUBTENDED BY A CHORD OF 1,264.85 FEET AT A BEARING OF S.08°20'42"W., FOR A DISTANCE OF 1,273.94 FEET TO THE END OF SAID CURVE; THENCE RUN S.03°31'24"E. ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY, FOR A DISTANCE OF 3,887.79 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE EASTERLY; THENCE RUN SOUTHERLY ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY AND ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 2,000.00 FEET, THROUGH A CENTRAL ANGLE OF 20°33'03", SUBTENDED BY A CHORD OF 713.52 FEET AT A BEARING OF S.13°47'56"E., FOR A DISTANCE OF 717.36 FEET TO THE END OF SAID CURVE; THENCE RUN S.24°04'27"E. ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY, FOR A DISTANCE OF 1,593.09 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE NORTHEASTERLY; THENCE RUN SOUTHEASTERLY ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY AND ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 2,875.00 FEET, THROUGH A CENTRAL ANGLE OF 31°16'49", SUBTENDED BY A CHORD OF 1,550.16 FEET AT A BEARING OF S.39°42'52"E., FOR A DISTANCE OF 1,569.58 FEET TO THE END OF SAID CURVE; THENCE RUN S.55°21'16"E. ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY, FOR A DISTANCE OF

EXHIBIT A

H:\2000\2000106\WP\2000106x\MIR-WEST-1.doc

HM PROJECT #2000106X
7/25/2011
REF. DWG. #A-1583-1
PAGE 2 OF 2

1,684.71 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE SOUTHWESTERLY; THENCE RUN SOUTHEASTERLY ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY AND ALONG THE ARC OF SAID CURVE TO THE RIGHT, HAVING A RADIUS OF 1,325.00 FEET, THROUGH A CENTRAL ANGLE OF $54^{\circ}31'33''$, SUBTENDED BY A CHORD OF 1,213.90 FEET AT A BEARING OF $S.28^{\circ}05'29''E.$, FOR A DISTANCE OF 1,260.94 FEET TO THE END OF SAID CURVE; THENCE RUN $S.00^{\circ}49'43''E.$ ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY, FOR A DISTANCE OF 600.19 FEET TO THE POINT OF BEGINNING; CONTAINING 396.652 ACRES, MORE OR LESS.


BEARINGS SHOWN HEREON REFER TO THE SOUTH LINE OF SECTION 23, TOWNSHIP 46 SOUTH, RANGE 25 EAST, OF LEE COUNTY, FLORIDA AS BEING $N.89^{\circ}44'39''W.$

THIS SKETCH AND LEGAL HAS BEEN PREPARED BASED UPON THE BANKS ENGINEERING, INC. PARCEL DESCRIPTIONS AS SHOWN ON DRAWINGS 1155SR, SHEETS 1 THROUGH 4, DATED 4/10/2000

HOLE MONTES, INC.
CERTIFICATE OF AUTHORIZATION NUMBER LB 1772


BY Thomas M. Murphy P.S.M. #5628
THOMAS M. MURPHY STATE OF FLORIDA

001 2013-00008



LINE	DIRECTION	DISTANCE
L1	N 78°05'54" E	532.81'
L2	N 78°14'27" E	501.77'
L3	N 84°28'38" E	384.54'
L4	S 85°27'57" E	381.80'
L5	S 74°31'06" E	209.87'
L6	S 00°49'43" E	800.18'

CURVE	RADIUS	LENGTH	CHORD	BEARING	DELTA
C1	17058.85'	1211.87'	1211.72'	N 15°35'30" W	54°06'48"
C2	30036.00'	1723.34'	1884.45'	S 08°25'42" W	22°44'14"
C3	2000.00'	717.26'	713.52'	S 13°47'46" E	20°23'03"
C4	28718.00'	1589.58'	1550.18'	S 38°47'53" E	21°18'48"
C5	1328.00'	1080.34'	1213.00'	S 28°52'28" E	54°21'37"

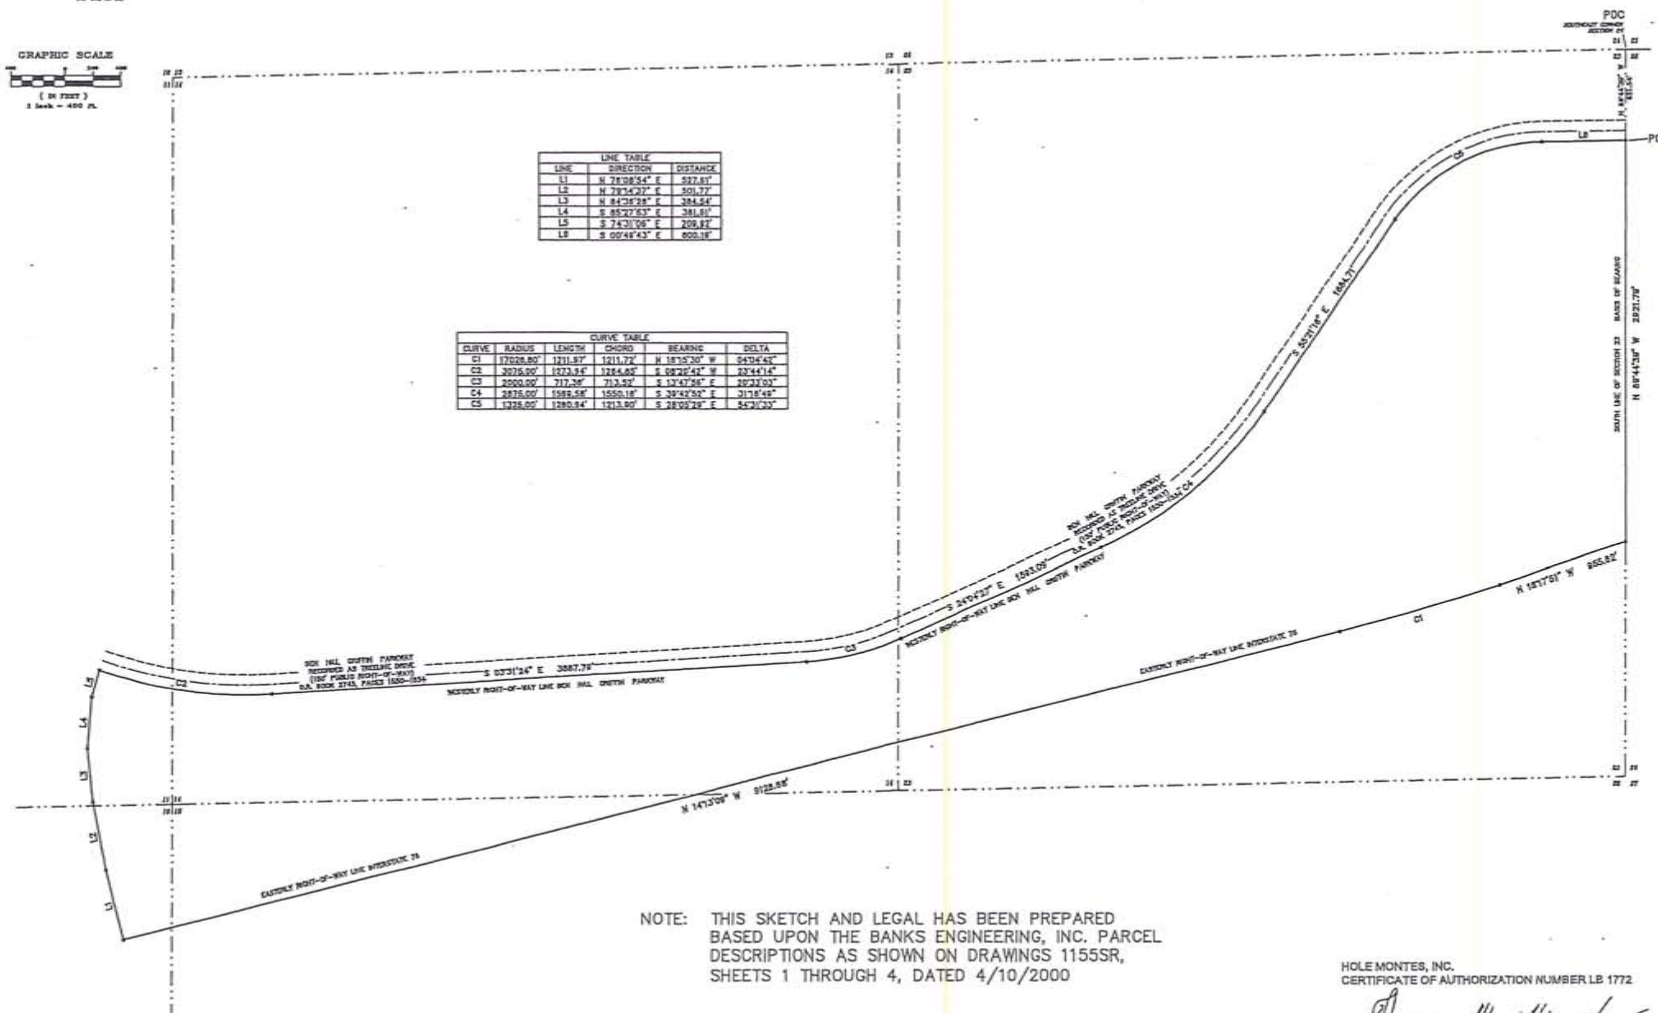

NOTE: THIS SKETCH AND LEGAL HAS BEEN PREPARED BASED UPON THE BANKS ENGINEERING, INC. PARCEL DESCRIPTIONS AS SHOWN ON DRAWINGS 11555R, SHEETS 1 THROUGH 4, DATED 4/10/2000

* NOT A SURVEY *

HOLE MONTES, INC.
CERTIFICATE OF AUTHORIZATION NUMBER LB 1772

BY Thomas M. Murphy
THOMAS M. MURPHY

P.S.M. 85828
STATE OF FLORIDA

LEGEND

POB POINT OF BEGINNING

POC POINT OF CLOSURE

FIELD BOOK

REVISIONS

DATE

MIROMAR LAKES

NOT VALID WITHOUT THE SIGNATURE AND SEAL OF A FLORIDA LICENSED SURVEYOR AND MAPPER.

PARTY CHIEF
DRAWN BY
CHECKED BY
TJM
VERTICAL SCALE
N/A

DATE
7/03
DATE
7/03
HORIZONTAL SCALE
1"=400'



950 Encore Way
Naples, FL 34110
Phone: (941) 254-2000
Florida Certificate of
Authorization No. 1772

SKETCH TO ACCOMPANY A LEGAL DESCRIPTION

DRAWING NO.
A-1583-1
PROJECT NO.
00.108X
REFERENCE NO.
MIR-WEST-1



950 Encore Way • Naples, Florida 34110 • Phone 239.254.2000 • Fax: 239.254.2099

LEGAL DESCRIPTION:

A PARCEL OF LAND LOCATED IN A PORTION OF SECTIONS 11, 12, 13, 14, 23, AND 24, TOWNSHIP 46 SOUTH, RANGE 25 EAST, AND SECTION 18, TOWNSHIP 46 SOUTH, RANGE 26 EAST, LEE COUNTY, FLORIDA, BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

COMMENCE AT THE SOUTHEAST CORNER OF SECTION 24, TOWNSHIP 46 SOUTH, RANGE 25 EAST, LEE COUNTY, FLORIDA; THENCE RUN N.00°48'26"W. ALONG THE EAST LINE OF THE SOUTHEAST ONE-QUARTER OF SAID SECTION 24, FOR A DISTANCE OF 37.50 FEET TO THE POINT OF BEGINNING OF THE PARCEL OF LAND HEREIN DESCRIBED, THE SAME BEING A POINT 37.50 FEET AS MEASURED AT RIGHT ANGLES TO THE SOUTH LINE OF SAID SECTION 24; THENCE RUN S.89°28'32"W., PARALLEL WITH THE SOUTH LINE OF SAID SECTION 24, FOR A DISTANCE OF 4812.99 FEET, TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE NORTHERLY; THENCE RUN WESTERLY, ALONG THE ARC OF SAID CURVE TO THE RIGHT, HAVING A RADIUS OF 2800.92 FEET, THROUGH A CENTRAL ANGLE OF 07°47'42", SUBTENDED BY A CHORD OF 380.77 FEET AT A BEARING OF N.86°37'37"W., FOR A DISTANCE OF 381.06 FEET TO THE END OF SAID CURVE; THENCE RUN N.82°43'46"W., FOR A DISTANCE OF 275.20 FEET, TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE SOUTHERLY; THENCE RUN WESTERLY, ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 2950.00 FEET, THROUGH A CENTRAL ANGLE OF 05°34'48", SUBTENDED BY A CHORD OF 287.19 FEET AT A BEARING OF N.85°31'11"W., FOR A DISTANCE OF 287.30 FEET TO THE END OF SAID CURVE, THE SAME BEING A POINT ON THE EASTERLY RIGHT-OF-WAY LINE OF BEN HILL GRIFFIN PARKWAY (A.K.A. TREELINE DRIVE), A 150 FOOT WIDE RIGHT-OF-WAY, RECORDED IN O.R. BOOK 2745, PAGES 1550 THROUGH 1554 OF THE PUBLIC RECORDS OF LEE COUNTY, FLORIDA; THENCE RUN N.00°49'43"W. ALONG SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 484.10 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE SOUTHWESTERLY; THENCE RUN NORTHWESTERLY ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE AND ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 1,475.00 FEET, THROUGH A CENTRAL ANGLE OF 54°31'33", SUBTENDED BY A CHORD OF 1,351.32 FEET AT A BEARING OF N.28°05'29"W., FOR A DISTANCE OF 1,403.69 FEET TO THE END OF SAID CURVE; THENCE RUN N.55°21'16"W. ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 423.96 FEET; THENCE RUN N.38°37'17"E., FOR A DISTANCE OF 180.44 FEET; THENCE RUN N.40°45'20"W., FOR A DISTANCE OF 1,287.06 FEET; THENCE RUN N.51°22'43"W., FOR A DISTANCE OF 275.00 FEET; THENCE RUN N.20°50'23"W., FOR A DISTANCE OF 170.61 FEET; THENCE RUN N.03°26'59"W., FOR A DISTANCE OF 196.02 FEET; THENCE RUN N.49°19'44"E., FOR A DISTANCE OF 344.71 FEET; THENCE RUN S.54°09'13"E., FOR A DISTANCE OF 1,057.59 FEET; THENCE RUN S.05°08'14"W., FOR A DISTANCE OF 497.67 FEET; THENCE RUN S.87°48'55"E., FOR A DISTANCE OF 1,464.61 FEET; THENCE RUN N.88°17'13"E., FOR A DISTANCE OF 233.73 FEET; THENCE RUN S.31°47'37"E., FOR A DISTANCE OF 631.21 FEET; THENCE RUN N.62°11'53"E., FOR A DISTANCE OF 2,704.05 FEET; THENCE RUN N.21°20'50"E., FOR A DISTANCE OF 1,025.79 FEET; THENCE RUN N.02°13'31"W., FOR A DISTANCE OF 339.05 FEET; THENCE RUN N.73°40'08"E., FOR A DISTANCE OF 497.73 FEET; THENCE RUN N.84°27'10"E., FOR A DISTANCE OF 648.96 FEET; THENCE RUN N.20°19'20"W., FOR A DISTANCE OF 155.37 FEET; THENCE RUN N.04°47'10"W., FOR A DISTANCE OF 137.24 FEET; THENCE RUN N.10°20'25"E., FOR A DISTANCE OF 89.58 FEET; THENCE RUN N.88°40'48"W., FOR A DISTANCE OF 108.51 FEET; THENCE RUN N.35°22'24"E., FOR A DISTANCE OF 61.49 FEET; THENCE RUN N.24°10'35"E., FOR A DISTANCE OF 16.58 FEET; THENCE RUN N.16°58'33"E., FOR A DISTANCE OF 22.30 FEET; THENCE RUN N.01°25'10"W., FOR A DISTANCE OF 17.20 FEET; THENCE RUN N.02°00'52"E., FOR A DISTANCE OF 22.73 FEET; THENCE RUN N.10°34'22"E., FOR A DISTANCE OF 27.69 FEET; THENCE RUN N.08°31'29"E., FOR A DISTANCE OF 27.56 FEET; THENCE RUN N.04°17'29"W., FOR A DISTANCE OF 27.54 FEET; THENCE RUN N.03°50'00"E., FOR A DISTANCE OF 32.88 FEET; THENCE RUN



HM PROJECT #2000106X
6/26/2014
REF. DWG. #A-1582-2
Page 2 of 3

950 Encore Way • Naples, Florida 34110 • Phone 239.254.2000 • Fax: 239.254.2099

N.05°16'54"E., FOR A DISTANCE OF 34.74 FEET; THENCE RUN N.14°36'53"W., FOR A DISTANCE OF 12.71 FEET; THENCE RUN N.49°59'45"W., FOR A DISTANCE OF 15.95 FEET; THENCE RUN N.67°08'11"W., FOR A DISTANCE OF 67.75 FEET; THENCE RUN N.67°33'34"E., FOR A DISTANCE OF 68.16 FEET; THENCE RUN N.57°34'58"E., FOR A DISTANCE OF 15.64 FEET; THENCE RUN N.53°45'20"E., FOR A DISTANCE OF 13.61 FEET; THENCE RUN N.58°32'02"E., FOR A DISTANCE OF 11.22 FEET; THENCE RUN N.54°40'50"E., FOR A DISTANCE OF 13.85 FEET; THENCE RUN N.49°36'55"E., FOR A DISTANCE OF 19.09 FEET; THENCE RUN N.37°17'03"E., FOR A DISTANCE OF 14.40 FEET; THENCE RUN N.25°04'13"E., FOR A DISTANCE OF 22.74 FEET; THENCE RUN N.30°25'33"E., FOR A DISTANCE OF 40.77 FEET; THENCE RUN S.70°47'07"E., FOR A DISTANCE OF 50.50 FEET; THENCE RUN N.19°32'42"E., FOR A DISTANCE OF 63.26 FEET; THENCE RUN N.62°41'55"E., FOR A DISTANCE OF 33.33 FEET; THENCE RUN N.60°03'38"E., FOR A DISTANCE OF 27.79 FEET; THENCE RUN N.68°56'32"E., FOR A DISTANCE OF 33.67 FEET; THENCE RUN N.69°27'09"E., FOR A DISTANCE OF 39.32 FEET; THENCE RUN N.76°09'54"E., FOR A DISTANCE OF 38.69 FEET; THENCE RUN N.84°37'56"E., FOR A DISTANCE OF 35.30 FEET; THENCE RUN N.71°01'39"E., FOR A DISTANCE OF 36.05 FEET; THENCE RUN N.56°16'09"E., FOR A DISTANCE OF 22.32 FEET; THENCE RUN N.54°45'23"E., FOR A DISTANCE OF 72.52 FEET; THENCE RUN N.43°40'48"E., FOR A DISTANCE OF 14.33 FEET; THENCE RUN N.36°37'28"E., FOR A DISTANCE OF 31.97 FEET; THENCE RUN N.16°15'53"E., FOR A DISTANCE OF 27.07 FEET; THENCE RUN N.00°14'32"W., FOR A DISTANCE OF 18.58 FEET; THENCE RUN N.01°01'18"W., FOR A DISTANCE OF 22.80 FEET; THENCE RUN N.11°30'29"E., FOR A DISTANCE OF 41.66 FEET; THENCE RUN N.25°25'32"E., FOR A DISTANCE OF 18.52 FEET; THENCE RUN N.29°13'14"E., FOR A DISTANCE OF 12.77 FEET; THENCE RUN N.09°42'26"E., FOR A DISTANCE OF 13.86 FEET; THENCE RUN N.10°10'17"W., FOR A DISTANCE OF 8.24 FEET; THENCE RUN N.25°29'33"W., FOR A DISTANCE OF 11.70 FEET; THENCE RUN N.71°45'42"W., FOR A DISTANCE OF 21.85 FEET; THENCE RUN N.59°03'27"W., FOR A DISTANCE OF 13.21 FEET; THENCE RUN N.37°04'03"W., FOR A DISTANCE OF 27.24 FEET; THENCE RUN N.00°38'43"W., FOR A DISTANCE OF 28.85 FEET; THENCE RUN N.10°12'59"E., FOR A DISTANCE OF 35.02 FEET; THENCE RUN N.01°52'01"E., FOR A DISTANCE OF 31.20 FEET; THENCE RUN N.05°34'22"E., FOR A DISTANCE OF 13.39 FEET; THENCE RUN N.01°01'36"W., FOR A DISTANCE OF 30.61 FEET; THENCE RUN N.15°40'00"W., FOR A DISTANCE OF 27.26 FEET; THENCE RUN N.22°54'25"W., FOR A DISTANCE OF 20.46 FEET; THENCE RUN N.20°19'15"W., FOR A DISTANCE OF 21.36 FEET; THENCE RUN N.17°17'45"W., FOR A DISTANCE OF 18.27 FEET; THENCE RUN N.25°34'23"W., FOR A DISTANCE OF 16.79 FEET; THENCE RUN N.15°41'23"W., FOR A DISTANCE OF 49.27 FEET; THENCE RUN N.00°29'10"W., FOR A DISTANCE OF 19.63 FEET; THENCE RUN S.65°22'51"W., FOR A DISTANCE OF 893.03 FEET; THENCE RUN S.62°02'33"W., FOR A DISTANCE OF 548.61 FEET; THENCE RUN N.84°00'27"W., FOR A DISTANCE OF 113.75 FEET; THENCE RUN S.73°01'40"W., FOR A DISTANCE OF 332.94 FEET; THENCE RUN S.88°47'09"W., FOR A DISTANCE OF 386.35 FEET; THENCE RUN N.01°12'51"W., FOR A DISTANCE OF 733.65 FEET; THENCE RUN N.75°24'23"E., FOR A DISTANCE OF 644.66 FEET; THENCE RUN N.02°55'16"W., FOR A DISTANCE OF 211.27 FEET; THENCE RUN N.19°49'36"E., FOR A DISTANCE OF 1,336.10 FEET; THENCE RUN S.88°44'00"W., FOR A DISTANCE OF 3,706.01 FEET; THENCE RUN N.00°58'18"W., FOR A DISTANCE OF 320.16 FEET; THENCE RUN S.89°01'42"W., FOR A DISTANCE OF 450.42 FEET; THENCE RUN S.03°10'23"E., FOR A DISTANCE OF 430.66 FEET; THENCE RUN S.88°17'12"W., FOR A DISTANCE OF 1,027.71 FEET; THENCE RUN S.01°42'48"E., FOR A DISTANCE OF 306.15 FEET; THENCE RUN S.47°45'12"W., FOR A DISTANCE OF 1,504.06 FEET; THENCE RUN S.88°27'56"W., FOR A DISTANCE OF 1,780.04 FEET TO A POINT ON THE SAID EASTERLY RIGHT-OF-WAY LINE; THENCE RUN N.03°31'24"W. ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 3,304.77 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE EASTERLY; THENCE RUN NORTHERLY ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE AND ALONG THE ARC OF SAID CURVE TO THE RIGHT, HAVING A RADIUS OF 2,925.00 FEET, THROUGH A CENTRAL ANGLE OF 23°44'13", SUBTENDED BY A CHORD OF 1,203.14 FEET AT A BEARING OF N.08°20'42"E., FOR A DISTANCE OF 1,211.79 FEET TO THE END OF SAID CURVE; THENCE RUN



HM PROJECT #2000106X
6/26/2014
REF. DWG. #A-1582-2
Page 3 of 3

950 Encore Way • Naples, Florida 34110 • Phone 239.254.2000 • Fax: 239.254.2099


N.20°12'49"E. ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 473.55 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE WESTERLY; THENCE RUN NORTHERLY ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE AND ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 10,075.00 FEET, THROUGH A CENTRAL ANGLE OF 19°11'28", SUBTENDED BY A CHORD OF 3,358.85 FEET AT A BEARING OF N.10°37'06"E., FOR A DISTANCE OF 3,374.60 FEET TO THE END OF SAID CURVE; THENCE RUN N.01°01'21"E. ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 909.75 FEET; THENCE RUN S.89°42'24"E., FOR A DISTANCE OF 1,049.81 FEET; THENCE RUN S.01°00'21"E., FOR A DISTANCE OF 847.76 FEET; THENCE RUN S.04°19'45"W., FOR A DISTANCE OF 1,091.78 FEET; THENCE RUN S.00°39'26"E., FOR A DISTANCE OF 1,432.24 FEET; THENCE RUN S.00°16'17"E., FOR A DISTANCE OF 606.52 FEET; THENCE RUN N.88°47'46"E., FOR A DISTANCE OF 376.79 FEET; THENCE RUN S.40°48'12"E., FOR A DISTANCE OF 322.81 FEET; THENCE RUN S.19°01'17"E., FOR A DISTANCE OF 249.77 FEET; THENCE RUN S.88°53'28"E., FOR A DISTANCE OF 216.94 FEET; THENCE RUN S.24°26'51"E., FOR A DISTANCE OF 150.17 FEET; THENCE RUN S.77°09'26"E., FOR A DISTANCE OF 573.01 FEET; THENCE RUN S.88°10'13"E., FOR A DISTANCE OF 1,363.08 FEET; THENCE RUN S.19°42'28"E., FOR A DISTANCE OF 157.73 FEET; THENCE RUN S.87°09'14"E., FOR A DISTANCE OF 469.81 FEET; THENCE RUN N.88°02'24"E., FOR A DISTANCE OF 612.22 FEET; THENCE RUN S.21°30'12"E., FOR A DISTANCE OF 81.17 FEET; THENCE RUN N.88°10'32"E., FOR A DISTANCE OF 846.89 FEET; THENCE RUN N.88°10'32"E., FOR A DISTANCE OF 1,137.62 FEET; THENCE RUN S.20°09'57"E., FOR A DISTANCE OF 344.08 FEET; THENCE RUN S.89°48'06"E., FOR A DISTANCE OF 80.00 FEET; THENCE RUN S.20°09'57"E., FOR A DISTANCE OF 807.57 FEET; THENCE RUN S.15°43'44"E., FOR A DISTANCE OF 978.45 FEET; THENCE RUN S.89°46'43"E., FOR A DISTANCE OF 516.03 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE SOUTHWESTERLY; THENCE RUN SOUTHEASTERLY ALONG THE ARC OF SAID CURVE TO THE RIGHT, HAVING A RADIUS OF 500.00 FEET, THROUGH A CENTRAL ANGLE OF 88°55'56", SUBTENDED BY A CHORD OF 700.49 FEET AT A BEARING OF S.45°18'45"E., FOR A DISTANCE OF 776.08 FEET TO THE END OF SAID CURVE; THENCE RUN S.00°50'47"E., FOR A DISTANCE OF 1,447.68 FEET; THENCE RUN S.09°57'20"W., FOR A DISTANCE OF 533.57 FEET TO A POINT ON THE EAST LINE OF SECTION 13, TOWNSHIP 46 SOUTH, RANGE 25 EAST; THENCE RUN S.00°50'47"E. ALONG THE EAST LINE OF SAID SECTION 13, FOR A DISTANCE OF 957.10 FEET TO THE NORTHEAST CORNER OF SECTION 24, TOWNSHIP 46 SOUTH, RANGE 25 EAST; THENCE RUN S.00°50'13"E. ALONG THE EAST LINE OF THE NORTHEAST ONE-QUARTER OF SAID SECTION 24, FOR A DISTANCE OF 2,639.78 FEET TO THE EAST QUARTER CORNER OF SAID SECTION 24; THENCE RUN S.00°48'26"E. ALONG THE EAST LINE OF THE SOUTHEAST ONE-QUARTER OF SAID SECTION 24, FOR A DISTANCE OF 2,606.47 FEET, TO THE POINT OF BEGINNING; CONTAINING 1,403.216 ACRES, MORE OR LESS.

BEARINGS SHOWN HEREON REFER TO THE EAST LINE OF THE SOUTHEAST ONE-QUARTER OF SECTION 24, TOWNSHIP 46 SOUTH, RANGE 25 EAST, LEE COUNTY, FLORIDA AS BEING S.00°48'26"E.

THIS SKETCH AND LEGAL HAS BEEN PREPARED BASED UPON THE BANKS ENGINEERING, INC. PARCEL DESCRIPTIONS AS SHOWN ON DRAWINGS 1155SR, SHEETS 1 THROUGH 4, DATED 4/10/2000 AND DRAWINGS 1418SR, SHEETS 1 AND 2, DATED 7/13/2000.


HOLE MONTES, INC.
CERTIFICATE OF AUTHORIZATION NUMBER LB 1772

BY


THOMAS M. MURPHY


P.S.M. #5628
STATE OF FLORIDA

NOTE: THIS SKETCH AND LEGAL HAS BEEN PREPARED BASED UPON THE BANKS ENGINEERING, INC. PARCEL DESCRIPTIONS AS SHOWN ON DRAWINGS 1155SR, SHEETS 1 THROUGH 4, DATED 4/10/2000 AND DRAWINGS 1418SR, SHEETS 1 AND 2, DATED 7/13/2000 NOT PLOTTED TO SCALE ON SHEETS SMALLER THAN 24X36



LINE	DIRECTION	DISTANCE
L1	S 82°35'24" W	260.55'
L2	S 80°18'47" E	354.00'
L3	S 52°27'14" E	424.88'
L4	S 70°27'17" E	108.65'
L5	N 42°45'20" E	1187.00'
L6	S 82°34'59" E	474.00'
L7	S 30°26'24" E	330.41'
L8	S 82°24'38" E	398.50'
L9	N 43°18'44" E	364.70'
L10	S 54°29'17" E	1047.83'

LINE	RADIUS	LENGTH	CHORD	BEARING	BEVEL
C1	1709.50'	1404.84'	1700.50'	S 80°26'24" E	50°26'24"
C2	2348.90'	1211.74'	1201.11'	N 88°25'04" E	34°24'17"
C3	10905.00'	2274.45'	2308.80'	N 87°27'05" E	1°17'11"
C4	3068.00'	778.44'	706.40'	S 25°12'45" E	64°36'34"
C5	1380.00'	301.50'	281.11'	N 81°17'57" E	7°12'44"
C6	2202.00'	267.50'	287.10'	N 80°20'11" E	2°24'44"

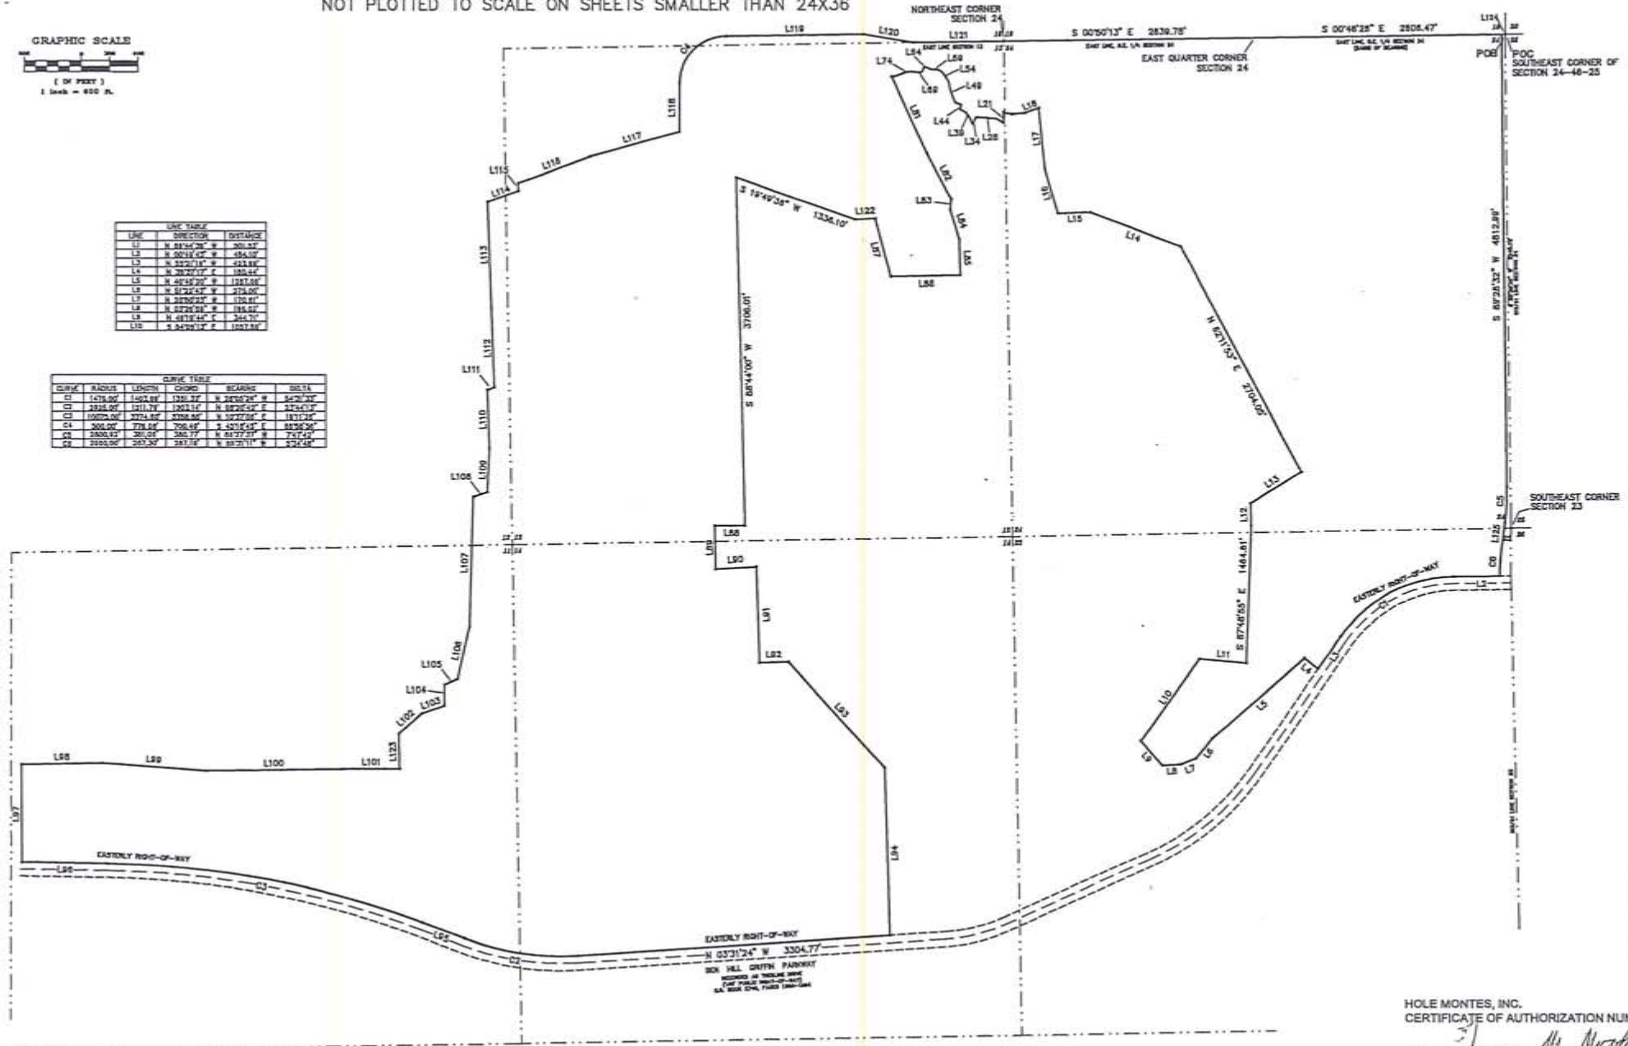

LINE	DIRECTION	DISTANCE
L1	S 82°35'24" W	260.55'
L2	S 80°18'47" E	354.00'
L3	S 52°27'14" E	424.88'
L4	S 70°27'17" E	108.65'
L5	N 42°45'20" E	1187.00'
L6	S 82°34'59" E	474.00'
L7	S 30°26'24" E	330.41'
L8	S 82°24'38" E	398.50'
L9	N 43°18'44" E	364.70'
L10	S 54°29'17" E	1047.83'
L11	S 82°35'24" W	260.55'
L12	S 80°18'47" E	354.00'
L13	S 52°27'14" E	424.88'
L14	S 70°27'17" E	108.65'
L15	N 42°45'20" E	1187.00'
L16	S 82°34'59" E	474.00'
L17	S 30°26'24" E	330.41'
L18	S 82°24'38" E	398.50'
L19	N 43°18'44" E	364.70'
L20	S 54°29'17" E	1047.83'
L21	S 82°35'24" W	260.55'
L22	S 80°18'47" E	354.00'
L23	S 52°27'14" E	424.88'
L24	S 70°27'17" E	108.65'
L25	N 42°45'20" E	1187.00'
L26	S 82°34'59" E	474.00'
L27	S 30°26'24" E	330.41'
L28	S 82°24'38" E	398.50'
L29	N 43°18'44" E	364.70'
L30	S 54°29'17" E	1047.83'
L31	S 82°35'24" W	260.55'
L32	S 80°18'47" E	354.00'
L33	S 52°27'14" E	424.88'
L34	S 70°27'17" E	108.65'
L35	N 42°45'20" E	1187.00'
L36	S 82°34'59" E	474.00'
L37	S 30°26'24" E	330.41'
L38	S 82°24'38" E	398.50'
L39	N 43°18'44" E	364.70'
L40	S 54°29'17" E	1047.83'
L41	S 82°35'24" W	260.55'
L42	S 80°18'47" E	354.00'
L43	S 52°27'14" E	424.88'
L44	S 70°27'17" E	108.65'
L45	N 42°45'20" E	1187.00'
L46	S 82°34'59" E	474.00'
L47	S 30°26'24" E	330.41'
L48	S 82°24'38" E	398.50'
L49	N 43°18'44" E	364.70'
L50	S 54°29'17" E	1047.83'
L51	S 82°35'24" W	260.55'
L52	S 80°18'47" E	354.00'
L53	S 52°27'14" E	424.88'
L54	S 70°27'17" E	108.65'
L55	N 42°45'20" E	1187.00'
L56	S 82°34'59" E	474.00'
L57	S 30°26'24" E	330.41'
L58	S 82°24'38" E	398.50'
L59	N 43°18'44" E	364.70'
L60	S 54°29'17" E	1047.83'
L61	S 82°35'24" W	260.55'
L62	S 80°18'47" E	354.00'
L63	S 52°27'14" E	424.88'
L64	S 70°27'17" E	108.65'
L65	N 42°45'20" E	1187.00'
L66	S 82°34'59" E	474.00'
L67	S 30°26'24" E	330.41'
L68	S 82°24'38" E	398.50'
L69	N 43°18'44" E	364.70'
L70	S 54°29'17" E	1047.83'
L71	S 82°35'24" W	260.55'
L72	S 80°18'47" E	354.00'
L73	S 52°27'14" E	424.88'
L74	S 70°27'17" E	108.65'
L75	N 42°45'20" E	1187.00'
L76	S 82°34'59" E	474.00'
L77	S 30°26'24" E	330.41'
L78	S 82°24'38" E	398.50'
L79	N 43°18'44" E	364.70'
L80	S 54°29'17" E	1047.83'
L81	S 82°35'24" W	260.55'
L82	S 80°18'47" E	354.00'
L83	S 52°27'14" E	424.88'
L84	S 70°27'17" E	108.65'
L85	N 42°45'20" E	1187.00'
L86	S 82°34'59" E	474.00'
L87	S 30°26'24" E	330.41'
L88	S 82°24'38" E	398.50'
L89	N 43°18'44" E	364.70'
L90	S 54°29'17" E	1047.83'
L91	S 82°35'24" W	260.55'
L92	S 80°18'47" E	354.00'
L93	S 52°27'14" E	424.88'
L94	S 70°27'17" E	108.65'
L95	N 42°45'20" E	1187.00'
L96	S 82°34'59" E	474.00'
L97	S 30°26'24" E	330.41'
L98	S 82°24'38" E	398.50'
L99	N 43°18'44" E	364.70'
L100	S 54°29'17" E	1047.83'
L101	S 82°35'24" W	260.55'
L102	S 80°18'47" E	354.00'
L103	S 52°27'14" E	424.88'
L104	S 70°27'17" E	108.65'
L105	N 42°45'20" E	1187.00'
L106	S 82°34'59" E	474.00'
L107	S 30°26'24" E	330.41'
L108	S 82°24'38" E	398.50'
L109	N 43°18'44" E	364.70'
L110	S 54°29'17" E	1047.83'
L111	S 82°35'24" W	260.55'
L112	S 80°18'47" E	354.00'
L113	S 52°27'14" E	424.88'
L114	S 70°27'17" E	108.65'
L115	N 42°45'20" E	1187.00'
L116	S 82°34'59" E	474.00'
L117	S 30°26'24" E	330.41'
L118	S 82°24'38" E	398.50'
L119	N 43°18'44" E	364.70'
L120	S 54°29'17" E	1047.83'
L121	S 82°35'24" W	260.55'
L122	S 80°18'47" E	354.00'
L123	S 52°27'14" E	424.88'
L124	S 70°27'17" E	108.65'
L125	N 42°45'20" E	1187.00'

HOLE MONTES, INC.
CERTIFICATE OF AUTHORIZATION NUMBER LB 1772
BY *Thomas M. Murphy*
THOMAS M. MURPHY
P.S.M. #5828
STATE OF FLORIDA

* NOT A SURVEY *

FIELD BOOK	REVISIONS	DATE

MIROMAR LAKES

NOT VALID WITHOUT THE SIGNATURE AND SEAL OF A FLORIDA LICENSED SURVEYOR AND MAPPER.	PARTY CHG.	DATE
	TH/AT	5/14
	CHG/ED	5/14
	TW/	
	N/A	

HOLE MONTES
ENGINEERING PLANNING & SURVEYING
550 Encore Way
Naples, FL 34110
Phone: (941) 254-2000
Florida Certificate of Authorization No. 1772

SKETCH TO ACCOMPANY A LEGAL DESCRIPTION

DRAWING NO.	A-1582-2
PROJECT NO.	00.106X
REFERENCE NO.	MIR-EAST-2

EXHIBIT B
Page 1 of 2

DEVELOPMENT PARAMETERS AND PHASING SCHEDULE – ~~2024~~2027

LAND USE	ACRES
Residential	404 <u>296</u> 3
Commercial/Office/Hotel	40 <u>2</u> 84
<u>Mixed Use</u>	<u>109</u>
Lakes/Miscellaneous Recreation/Buffers	312
Conservation Areas	338

LAND USE	PHASE ONE	PHASE TWO	TOTAL
RESIDENTIAL	1,414	1,186	2,600
Single Family	314	386	700
Multiple Family	1,100	800	1,900
RETAIL COMMERCIAL (gfa)	160,000	90,000	250,000
HOTEL ROOMS	350	100	450
OFFICE (gfa)*	100,000	240,000	340,000
RESEARCH & DEVELOPMENT (gfa)	-	40,000	40,000
CLUBHOUSE	20,000	20,000	40,000
GOLF COURSE	18 Holes	18 Holes	36 <u>18</u> Holes
BEACH PARK	10 Acres	-	10 Acres

*The 340,000 square feet of office use may be converted to Research and Development use on a one square foot to 1.1 square foot ratio.


EXHIBIT B
Page 2 of 2

	ANCILLARY BOATING FACILITIES					
	PHASE ONE			PHASE TWO		
	Slips	Day Slips	Boat Ramp	Slips	Day Slips	
Multiple-Family Parcel	25			25		
Beach Club	10	40	√			
Town Center	25	25	√	25	25	
Single Family Homes	Individual Docks as Applicable					
Boat Club				10	40	√

1. A maximum of 250 ancillary wet boat slips may be located in the "R", "R2", "C2", the Beach Club and the Boat Club tracts in addition to a dock for each single-family lakefront lot as of 11/29/1999.
2. Single-family docks may be converted to multiple-family slips on a 1:1 basis.
3. Up to 250 wet slips may be converted to dry storage associated with the Boat Club on a 1:1 basis.

LEGEND

- C1 COMMERCIAL 1
 CS COMMERCIAL SOUTH
 MU MIXED USE
 R RESIDENTIAL
 GC GOLF COURSE
 R2 RESIDENTIAL 2
 L CONCEPTUAL LAKE LOCATION
 CO CONSERVATION AREA
 BHG PKWY ACCESS




LAND USE SUMMARY

DESCRIPTION	UNITS	ACRES
RESIDENTIAL "R" AND "R2"		963±
SINGLE FAMILY UNITS	700 UNITS	
MULTI-FAMILY UNITS	1,900 UNITS	
TOTAL UNITS	2,600 UNITS	
COMMERCIAL/OFFICE/HOTEL "C1", "CS" AND "C2"		84±
RETAIL COMMERCIAL (GFA)	250,000 SQ FT	
HOTEL ROOMS	450 ROOMS	
OFFICE (GFA)	340,000 SQ FT	
RESEARCH AND DEVELOPMENT (GFA)	40,000 SQ FT	
MIXED USE "MU"		109±
LAKES/MISCELLANEOUS RECREATION/BUFFERS/RIGHT-OF-WAY		305.7±
CONSERVATION AREAS "CO" (INCLUDES WETLAND BUFFERS)		344.7±
TOTAL ACRES		1,806

DCI 2013-00008

DRI 2012-00021

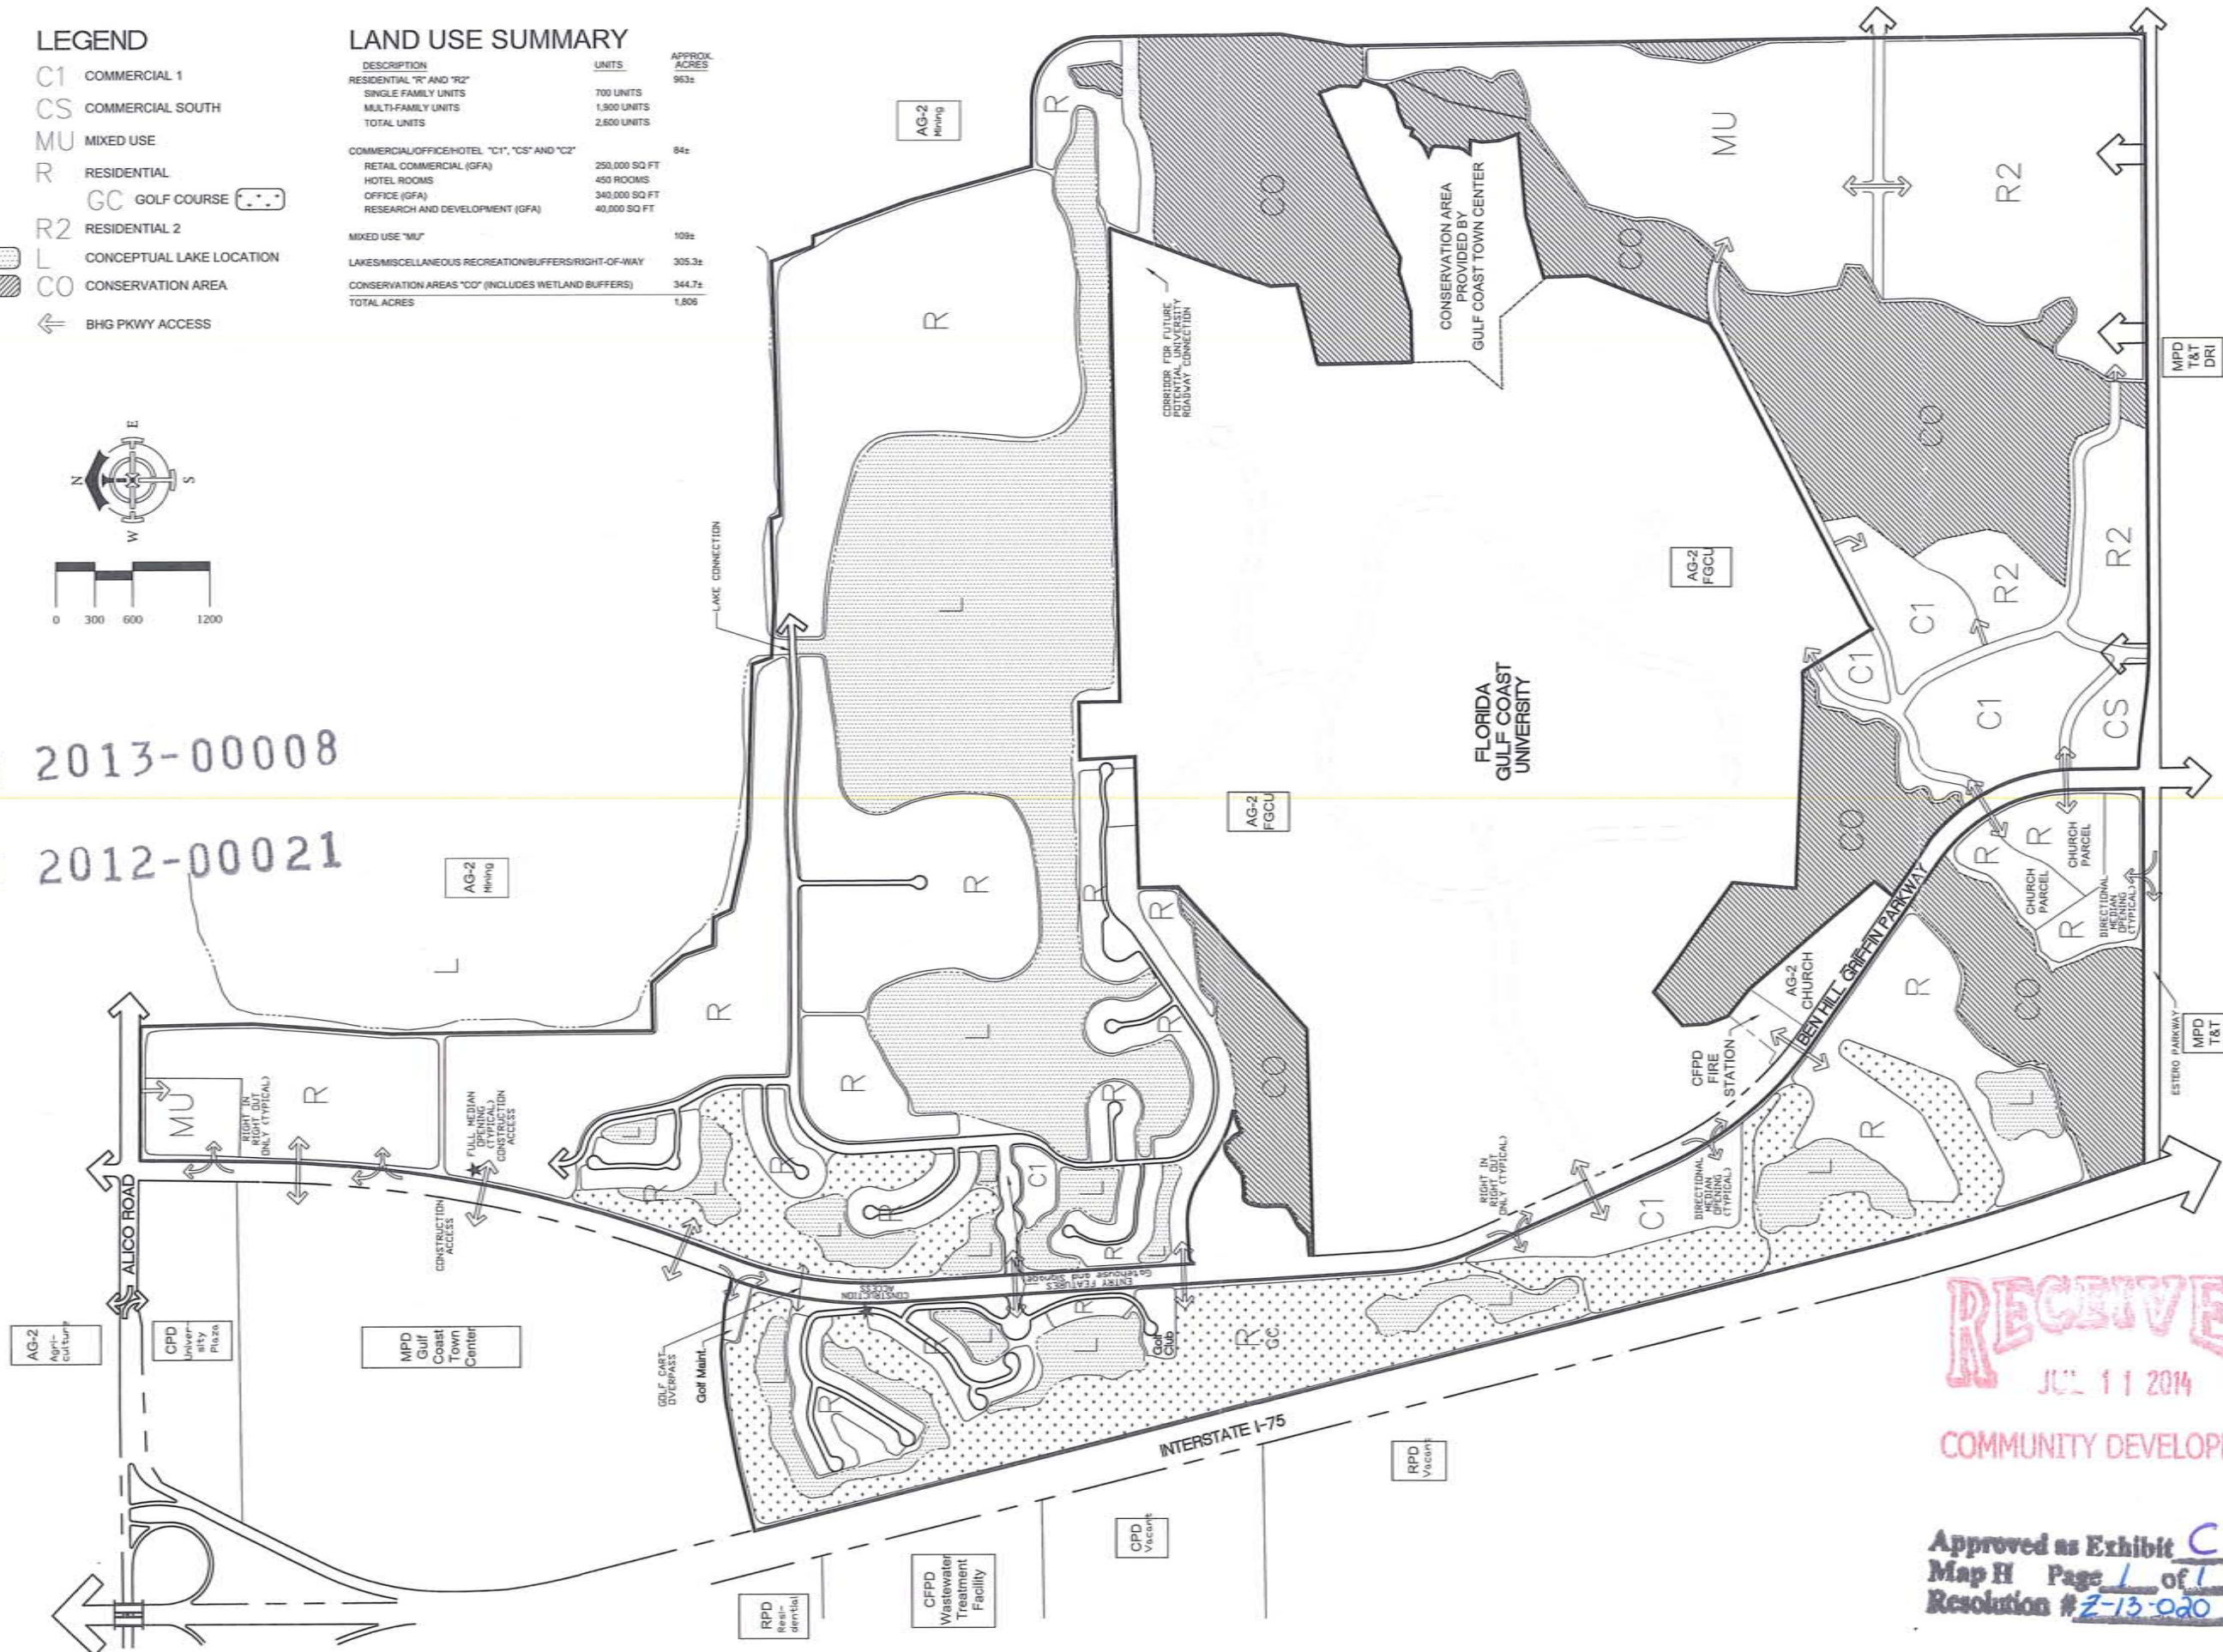


RECEIVED
JUL 11 2014
COMMUNITY DEVELOPMENT

Approved as Exhibit C
Map H Page 1 of 1
Resolution # 2-13-020

DELISI FITZGERALD, INC.
Planning - Engineering - Project Management

1605 Hendry Street
Fort Myers, FL 33901
239-418-0691 • 239-418-0692 fax
Florida Certificate of Authorization
Engineering LB #: 26978



BEACH & GOLF CLUB
MIROMAR LAKES

PROJECT:
MIROMAR LAKES
MIROMAR LAKES, FL


[illegible]

MAP H
FEBRUARY 14, 2014

Project Manager:	-
Drawn By:	GWS
Checked By:	-
Project Number:	21248
Cad File:	-
Xref:	-
Xref:	-

FOR PERMITTING PURPOSES ONLY
NOT FOR CONSTRUCTION

Sheet Number:	01
---------------	----

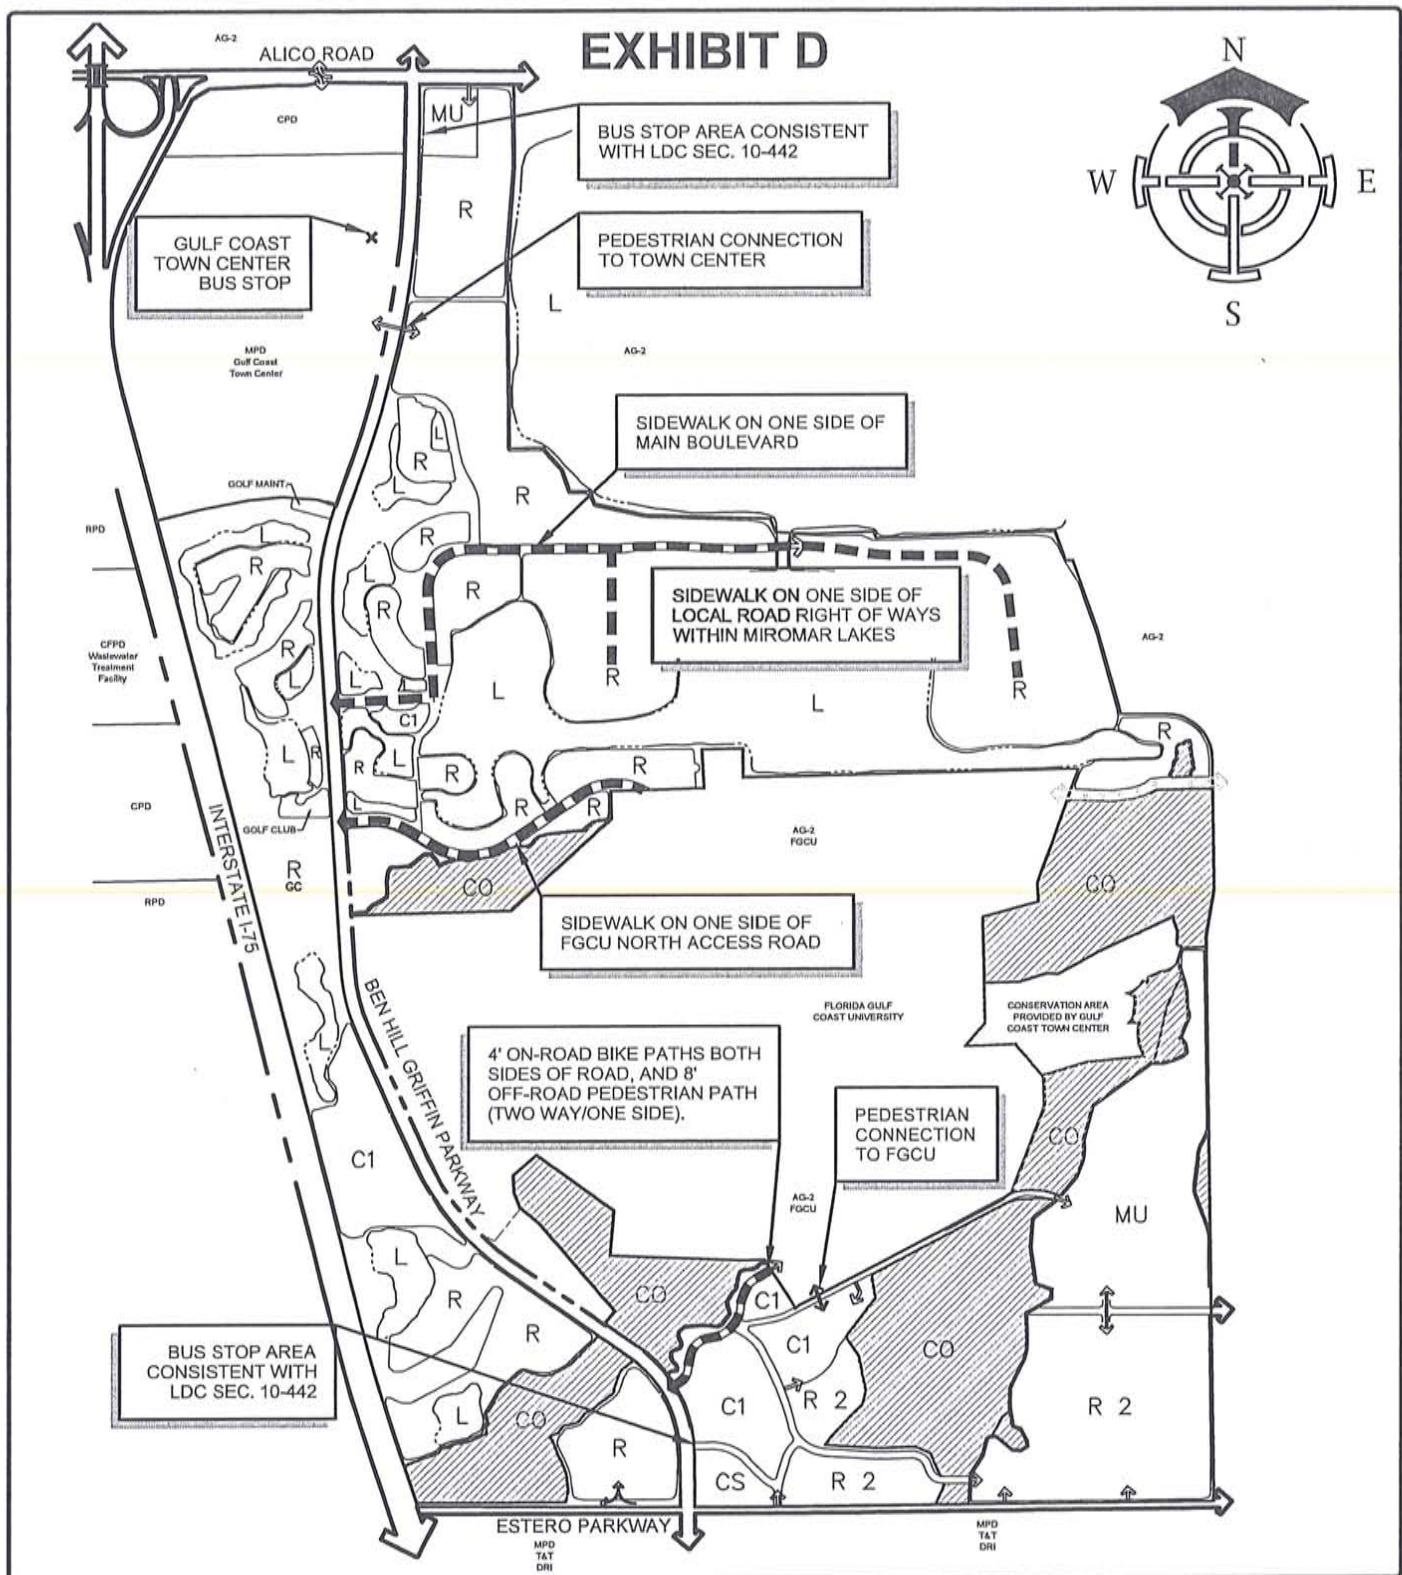

DELSI FITZGERALD, INC.

Planning - Engineering - Project Management

1605 Hendry Street
Fort Myers, FL 33901
239-418-0691 • 239-418-0692 fax

Florida Certificate of Authorization:
Engineering LB #: 26978

OWNER / DEVELOPER:
MIROMAR LAKES
MIROMAR LAKES, FL

PROJECT:

MIROMAR LAKES

PEDESTRIAN AND BICYCLE FACILITIES AND BUS STOP LOCATIONS

Project Number:	21248
Part of Section(s):	11,12,13,14,23 & 24
Township:	46S Range: 25E
County, State:	LEE COUNTY, FL

Sheet Number:

1

DRI
EXHIBIT E
BIENNIAL MONITORING REPORT REQUIREMENTS

The Biennial Monitoring Report that must be submitted by the Developer in accordance with Subsections 380.06(15) and 380.06(18), Florida Statutes, and 9J-2.025(7), Florida Administrative Code, must include the following:


- A. Any changes in the plan of development or in the representations contained in the application for development approval, or in the phasing for the reporting year and for the next year;
- B. A summary comparison of development activity proposed and actually conducted for the year;
- C. Identification of undeveloped tracts of land, other than individual single family lots, that have been sold to separate entities or developers.
- D. Identification and intended use of lands purchased, leased, or optioned by the developer adjacent to the original DRI site since the development order was issued;
- E. A specific assessment of the developer's and the local government's compliance with each individual condition of approval contained in the DRI Development Order and the commitments which are contained in the application for development approval and which have been identified by the local government, the RPC, or the DCA as being significant;
- F. Any requests for substantial deviation determination that were filed in the reporting year and to be filed during the following year;
- G. An indication of a change, if any, in local government jurisdiction for any portion of the development since the development order was issued;
- H. A list of significant local, state, and federal permits which have been obtained or which are pending by agency, type of permit, permit number and purpose of each;
- I. A statement that all persons have been sent copies of the biennial report in conformance with Subsections 380.06(15) and (18), Florida Statutes;
- J. A copy of any recorded notice of the adoption of a development order or the subsequent modification of an adopted development order that was recorded by the developer pursuant to Paragraph 380.06(15)(f), Florida Statutes.

NOTE: The Florida Administrative Code specifically requires that the development order specify the requirements for the biennial report. The Administrative Code requires that the biennial report will be submitted to DCA, the RPC, and the local government on Form RPM-BSP-Annual Report-1.

EXHIBIT F

FLEPPC List Definitions: Exotic – a species introduced to Florida, purposefully or accidentally, from a natural range outside of Florida. Native – a species whose natural range includes Florida. Naturalized exotic – an exotic that sustains itself outside cultivation (it is still exotic; it has not “become” native). Invasive exotic – an exotic that not only has naturalized, but is expanding on its own in Florida native plant communities.

Abbreviations: Government List (Gov. List): P = Prohibited aquatic plant by the Florida Department of Agriculture and Consumer Services; N = Noxious weed listed by Florida Department of Agriculture & Consumer Services; U = Noxious weed listed by U.S. Department of Agriculture. Regional Distribution (Reg. Dist.): N = north, C = central, S = south, referring to each species' current distribution in general regions of Florida (not its potential range in the state). Please refer to the adjacent map.



Citation example:

FLEPPC. 2011. List of Invasive Plant Species. Florida Exotic Pest Plant Council. Internet: <http://www.fleppc.org/list/11list.htm> or *Wildland Weeds* Vol. 14(3-4):11-14. Summer/Fall 2011.

The 2011 list was prepared by the FLEPPC Plant List Committee:

Keith A. Bradley – Chair (2006-present), The Institute for Regional Conservation, 22601 SW 152nd Ave., Miami, FL 33170, (305) 247-6547, bradley@regionalconservation.org

Janice A. Duquesnel, Florida Park Service, Florida Department of Environmental Protection, P.O. Box 1052, Islamorada, FL 33036, (305) 664-8455, Janice.Duquesnel@dep.state.fl.us

David W. Hall, Private Consulting Botanist, 3666 NW 13th Place, Gainesville, FL 32605, (352) 375-1370

Roger L. Hammer, Retired Naturalist and Author, 17360 Avocado Drive, Homestead, FL 33030, kaskazi44@comcast.net

Patricia L. Howell, Broward County Parks, Environmental Section, 950 NW 38th St., Oakland Park, FL 33309, (954) 357-8137, phowell@broward.org

Colette C. Jacono, USDA/APHIS/PPQ, 1911 SW 34th Street, Gainesville, FL 32608, (352) 258-4458, Colette.C.Jacono@aphis.usda.gov

Kenneth A. Langeland, University of Florida-IFAS, Center for Aquatic and Invasive Plants, 7922 NW 71st St., Gainesville, FL 32653, (352) 392-9614, ga10r8@ufl.edu

Chris Lockhart, Habitat Specialists, Inc., c/o P.O. Box 243116, Boynton Beach, FL 33424-3116, (561) 738-1179, chris@lockhart.org

Gil Nelson, Gil Nelson Associates, 157 Leonard's Dr., Thomasville, GA 31792, gil@gilnelson.com

Robert W. Pemberton, Research Associate, Florida Museum of Natural History and Fairchild Tropical Botanic Garden, 2121 SW 28th Terrace, Fort Lauderdale, FL 33312, rpemberton5@gmail.com

Jimi L. Saddle, Everglades National Park, 40001 State Road 9336, Homestead, FL 33034, (305) 242-7806, Jimi_Saddle@nps.gov

Robert W. Simons, 1122 SW 11th Ave., Gainesville, FL 32601-7816

Daniel B. Ward, Department of Botany, University of Florida, 220 Bartram Hall, Gainesville, FL 32611

Richard P. Wunderlin, Institute for Systematic Botany, Dept. of Biological Sciences, University of South Florida, Tampa, FL 33620, (813) 974-2359, rwunder@cas.usf.edu

For more information on invasive exotic plants, including links to related web pages, visit the Florida EPPC web site: <http://www.fleppc.org>

Application for Membership in the Florida Exotic Pest Plant Council

Annual Membership Levels

(circle one)

Individual		Institutional	
Student	\$10	Library	\$100
General	\$30	General	\$100
Donor	\$75 +	Contributor	\$501 – \$10,000
		Patron	\$10,001 +

FLEPPC is a 501(c)(3) nonprofit organization.

NAME _____

ORGANIZATION _____

MAILING ADDRESS _____

CITY, STATE, ZIP _____

TELEPHONE _____

FAX _____

E-MAIL _____

Mail application & dues, payable to FLEPPC, to:
Florida EPPC, Treasurer
P.O. Box 23426
Fort Lauderdale, FL 33307
(Or join online at www.fleppc.org)

Florida Exotic Pest Plant Council's 2011 List of Invasive Plant Species

The mission of the Florida Exotic Pest Plant Council is to support the management of invasive exotic plants in Florida's natural areas by providing a forum for the exchange of scientific, educational and technical information.

Purpose of the List:

To focus attention on —

- ▶ the adverse effects exotic pest plants have on Florida's biodiversity and native plant communities,
- ▶ the habitat losses in natural areas from exotic pest plant infestations,
- ▶ the impacts on endangered species via habitat loss and alteration,
- ▶ the need for pest-plant management,
- ▶ the socio-economic impacts of these plants (e.g., increased wildfires or flooding in certain areas),
- ▶ changes in the severity of different pest plant infestations over time,
- ▶ providing information to help managers set priorities for research and control programs.



www.fleppc.org

CATEGORY I

Invasive exotics that are altering native plant communities by displacing native species, changing community structures or ecological functions, or hybridizing with natives. This definition does not rely on the economic severity or geographic range of the problem, but on the documented ecological damage caused.

Scientific Name	Common Name	Gov. List	Reg. Dis.	Scientific Name	Common Name	Gov. List	Reg. Dis.
<i>Abrus precatorius</i>	rosary pea	N	C, S	<i>Macfadyena unguis-cati</i>	cat's claw vine	N, C, S	
<i>Acacia auriculiformis</i>	earleaf acacia	C, S		<i>Manihara zapota</i>	sapodilla	S	
<i>Albizia julibrissin</i>	mimosa, silk tree	N, C		<i>Melaleuca quinquenervia</i>	melaleuca, paper bark	P, N, U	C, S
<i>Albizia lebbek</i>	woman's tongue	C, S		<i>Melinis repens</i>	Natal grass	N, C, S	
<i>Ardisia crenata</i>	coral ardisia	N, C, S		(= <i>Rhynchosyris repens</i>)			
(<i>A. crenulata</i> misapplied)				<i>Mimosa pigra</i>	catclaw mimosa	P, N, U	C, S
<i>Ardisia elliptica</i>	shoebutton ardisia	N	C, S	<i>Nandina domestica</i>	nandina, heavenly bamboo	N, C	
(<i>A. humilis</i> misapplied)				<i>Nephrolepis brownii</i>	Asian sword fern	C, S	
<i>Asparagus acutropicus</i>	asparagus-fern	N, C, S		(= <i>N. multiflora</i>)			
(= <i>A. sprengeri</i> ; <i>A. densiflorus</i> misapplied)				<i>Nephrolepis cordifolia</i>	sword fern	N, C, S	
<i>Bauhinia variegata</i>	orchid tree	C, S		<i>Neyraudia rynoudiana</i>	Burma reed, cane grass	N	S
<i>Bischofia javanica</i>	bishopwood	C, S		<i>Nymphoides cristata</i>	snowflake	C, S	
<i>Calophyllum antillanum</i>	sunk maria, mast wood	S		<i>Pandanus crassifolius</i>	sewer vine, onion vine	N	S
(<i>C. calala</i> and <i>C. inophyllum</i> misapplied)	Alexandrian laurel			<i>Pandanus forsteri</i>	skunk vine	N, C, S	
<i>Casuarina equisetifolia</i>	Australian-pine, beach sheoak	P, N	N, C, S	<i>Panicum repens</i>	torpedo grass	N, C, S	
<i>Casuarina glauca</i>	suckering Australian-pine, gray sheoak	P, N	C, S	<i>Pennisetum purpureum</i>	Napier grass	N, C, S	
<i>Cinnamomum camphora</i>	camphor tree	N, C, S		<i>Phymosorus scolopendria</i>	serpent fern, wart fern	S	
<i>Colocasia esculenta</i>	wild taro	N, C, S		<i>Plinia stratiotes</i>	water-lettuce	P	N, C, S
<i>Colubrina asiatica</i>	lather leaf	N	S	<i>Psidium cattleianum</i>	strawberry guava	C, S	
<i>Cupaniopsis anacardioides</i>	carrotwood	N	C, S	<i>Psidium guajava</i>	guava	C, S	
<i>Deparia petersenii</i>	Japanese false spleenwort	I	N, C	<i>Pueraria montana</i> var. <i>lobata</i>	loa'loa	N	N, C, S
<i>Dioscorea alata</i>	winged yam	N	N, C, S	(= <i>P. lobata</i>)			
<i>Dioscorea bulbifera</i>	air-potato	N	N, C, S	<i>Rhodomyrtus tomentosa</i>	downy rose-myrtle	N	C, S
<i>Eichhornia crassipes</i>	water-hyacinth	P	N, C, S	<i>Rhynchosyris repens</i> (See <i>Melinis repens</i>)			
<i>Eugenia uniflora</i>	Surinam cherry	C, S		<i>Ruellia simplex</i>	Mexican-petunia	N, C, S	
<i>Ficus microcarpa</i> (<i>F. nitida</i> and <i>F. retusa</i> var. <i>nitida</i> misapplied)	laurel fig	C, S		<i>Salvinia minima</i>	water spangles	N, C, S	
<i>Hydrilla verticillata</i>	hydrilla	P, U	N, C, S	<i>Sapientia schiferum</i>	popcorn tree	N	N, C, S
<i>Hydrophilum polysperma</i>	green hygro	P, U	N, C, S	(= <i>Triadica schifera</i>)	Chinese tallow tree		
<i>Hymenocallis amplexicaulis</i>	West Indian marsh grass	N, C, S		<i>Scaevola taccada</i>	scaevola, half-flower, beach naupaka	N	C, S
<i>Imperata cylindrica</i>	cogon grass	N, U	N, C, S	(= <i>Scaevola taccada</i> , <i>S. frutescens</i>)			
(<i>I. brasiliensis</i> misapplied)				<i>Schefflera actinophylla</i>	schefflera, Queensland umbrella tree	C, S	
<i>Ipomoea aquatica</i>	water-spinach	P, U	C	(= <i>Brassia actinophylla</i>)			
<i>Jasminum dichotomum</i>	Gold Coast jasmine	C, S		<i>Schinus molle</i>	Brazilian-pepper	P, N	N, C, S
<i>Jasminum fluminense</i>	Brazilian jasmine	C, S		<i>Scleria lacustris</i>	Wright's nutrush	C, S	
<i>Lantana camara</i>	lantana, shrub verbena	N, C, S		<i>Senna pedunculata</i> var. <i>glabrata</i>	climbing cassia	C, S	
(= <i>L. strigocamara</i>)				(= <i>Cassia coluteoides</i>)	Christmas cassia, Christmas senna		
<i>Ligustrum lucidum</i>	glossy privet	N, C		<i>Solanum tampicense</i>	wetland nightshade, aquatic soda apple	N, U	C, S
<i>Ligustrum sinense</i>	Chinese privet, hedge privet	N, C, S		(= <i>S. holoseriale</i>)			
<i>Lonicera japonica</i>	Japanese honeysuckle	N, C, S		<i>Solanum villosum</i>	tropical soda apple	N, U	N, C, S
<i>Ludwigia peruviana</i>	Peruvian primrosewillow	N, C, S		<i>Syngonium podophyllum</i>	arrowhead vine	N, C, S	
<i>Lumnitzera racemosa</i>	kripi; white-flowered mangrove, black mangrove	S		<i>Syzygium cumini</i>	jambolan-plum, Java-plum	C, S	
<i>Lygodium subintegrum</i>	Tropical American water grass	S		<i>Tectaria indica</i>	incised halberd fern	S	
<i>Lygodium japonicum</i>	Japanese climbing fern	N	N, C, S	<i>Thespesia populnea</i>	seaside mahoe	C, S	
<i>Lygodium microphyllum</i>	Old World climbing fern	N, U	C, S	<i>Tradescantia fluminensis</i>	small-leaf spiderwort	N, C	
				<i>Urena lobata</i>	Caesar's weed	N, C, S	
				<i>Urochloa mutica</i>	Para grass	C, S	
				(= <i>Brachiaria mutica</i>)			

CATEGORY II

Invasive exotics that have increased in abundance or frequency but have not yet altered Florida plant communities to the extent shown by Category I species. These species may become ranked Category I, if ecological damage is demonstrated.

Scientific Name	Common Name	Gov. List	Reg. Dis.	Scientific Name	Common Name	Gov. List	Reg. Dis.
<i>Adenanthera pavonina</i>	red sandalwood	S		<i>Livistona chinensis</i>	Chinese fan palm	C, S	
<i>Agave sisalana</i>	sisal hemp	C, S		<i>Melia azadirach</i>	Chinaberry	N, C, S	
<i>Alcurites fordii</i> (= <i>Veronica fordii</i>)	tung oil tree	N, C		<i>Melastoma malabala</i>	Melastomegrass	C, S	
<i>Alstonia macrophylla</i>	devil tree	S		<i>Merremia tuberosa</i>	wood-rose	C, S	
<i>Alternanthera philoxeroides</i>	alligator weed	P	N, C, S	<i>Milbania micrantha</i>	mile-a-minute vine	N, U	S
<i>Antigonon leptopus</i>	coral vine	N, C, S		<i>Murraya paniculata</i>	orange-jessamine	S	
<i>Ardisia japonica</i>	Japanese ardisia	N		<i>Myriophyllum spicatum</i>	Eurasian water-milfoil	P	N, C, S
<i>Aristolochia litoralis</i>	calico flower	N, C, S		<i>Panicum maximum</i>	Guinea grass	N, C, S	
<i>Asystasia gangetica</i>	Ganges primrose	C, S		(= <i>Utricularia maxima</i> , <i>Megathyrus maximus</i>)			
<i>Begonia cucullata</i>	wax begonia	N, C, S		<i>Passiflora biflora</i>	two-flowered passion vine	S	
<i>Blechnum pyramidalatum</i> (see <i>Ruellia blechnum</i>)				<i>Pennisetum setaceum</i>	green fountain grass	S	
<i>Broussonetia papyrifera</i>	paper mulberry	N, C, S		<i>Phoenix reclinata</i>	Senegal date palm	C, S	
<i>Bruguiera gymnorhiza</i>	large-leaved mangrove	S		<i>Phyllostachys aurea</i>	golden bamboo	N, C	
<i>Callisia fragrans</i>	inch plant, spirostema	C, S		<i>Philosopium pontandrium</i>	Philippine pilosporum	S	
<i>Callistemon viminalis</i>	bottlebrush	C, S		<i>Pteris vittata</i>	Chinese brake fern	N, C, S	
(= <i>Melaleuca viminalis</i>)	weeping bottlebrush			<i>Pythosperma elegans</i>	solitaire palm	S	
<i>Casuarina cunninghamiana</i>	river sheoak, Australian-pine	P	C, S	<i>Rhoeo spathacea</i> (see <i>Tradescantia spathacea</i>)			
<i>Cecropia palmata</i>	trumpet tree	S		<i>Ricinus communis</i>	castor bean	N, C, S	
<i>Cestrum diurnum</i>	day jessamine	C, S		<i>Rotala rotundifolia</i>	roundleaf toothcup	S	
<i>Chamaedorea seifritzii</i>	bamboo palm	S		<i>Ruellia blechnum</i>	green shrimp plant, Brown's blechnum	N, C, S	
<i>Clematis integriflora</i>	Japanese clematis	N, C		<i>Sansiviera hyacinthoides</i>	bowstring hemp	C, S	
<i>Cocos nucifera</i>	coconut palm	S		<i>Sesbania punicea</i>	purple sesban, rankebox	N, C, S	
<i>Cryptostegia madagascariensis</i>	rubber vine	C, S		<i>Solanum diphyllum</i>	two-leaf nightshade	N, C, S	
<i>Cyperus involutus</i>	umbrella plant	C, S		<i>Solanum torvum</i>	susumber, turkey berry	N, U	N, C, S
(<i>C. alternifolius</i> misapplied)				<i>Sphenocleus trilobata</i>	wedelia	N, C, S	
<i>Cyperus proflifer</i>	dwarf papyrus	C, S		(= <i>Wedelia trilobata</i>)			
<i>Dactyloctenium aegyptium</i>	Durban crowfootgrass	N, C, S		<i>Stachytarpheta jamaicensis</i>	nettle-leaf portweed	S	
<i>Dalbergia sissoo</i>	Indian rosewood, sissoo	C, S		(= <i>S. urticifolia</i>)			
<i>Elaeagnus pungens</i>	silverthorn, thorny olive	N, C		<i>Syagrus romanoffiana</i>	queen palm	C, S	
<i>Elaeagnus umbellata</i>	silverberry, autumn olive	N		(= <i>Arcastrum romanoffianum</i>)			
<i>Epipremnum pinnatum</i>	pothos	C, S		<i>Syzygium jambos</i>	Malabar plum, rose-apple	N, C, S	
<i>Ficus olivacea</i>	false banyan, council tree	S		<i>Talipariti tiliacum</i>	mahoe, sea hibiscus	C, S	
<i>Flacourtia indica</i>	governor's plum	S		(= <i>Hibiscus tiliaceus</i>)			
<i>Hemarthria alissima</i>	limpo grass	C, S		<i>Terminalia catappa</i>	tropical-almond	C, S	
<i>Hibiscus tiliaceus</i> (See <i>Talipariti tiliacum</i>)				<i>Terminalia muelleri</i>	Australian-almond	C, S	
<i>Hyparrhenia rufa</i>	jaragua	N, C, S		<i>Tradescantia spathacea</i>	oyster plant	S	
<i>Ipomoea carnea</i> ssp. <i>fistulosa</i>	shrubby morning-glory	P	C, S	(= <i>Rhoeo spathacea</i> , <i>Rhoeo discolor</i>)			
(= <i>I. fistulosa</i>)				<i>Triplaris eudora</i>	puncture vine, burr-nut	N, C, S	
<i>Kalanchoe pinnata</i>	life plant	C, S		<i>Vitex trifolia</i>	simple-leaf chaste tree	C, S	
(= <i>Bryophyllum pinnatum</i>)				<i>Washingtonia robusta</i>	Washington fan palm	C, S	
<i>Koeberlinia elegans</i>	flamegold tree	C, S		<i>Wedelia</i> (see <i>Sphenocleus</i> above)			
ssp. <i>formosana</i> (= <i>K. formosana</i> ; <i>K. paniculata</i> misapplied)				<i>Wisteria sinensis</i>	Chinese wisteria	N, C	
<i>Landoltia punctata</i>	Spotted duckweed	N, C, S		<i>Xanthosoma sagittifolium</i>	malanga, elephant ear	N, C, S	
(= <i>Spinalela punctata</i>)							
<i>Leucaena leucocephala</i>	leucaena	N	N, C, S				
<i>Limnophila sessiliflora</i>	Asian marshweed	P, U	N, C, S				

¹Does not include *Pisonia microcarpa* subsp. *juysensis*, which is sold as "Green Island Plant" ²Many names are applied to this species in Florida because of a complicated taxonomic and nomenclatural history. Plants cultivated in Florida, all representing the same invasive species, have in the past been referred to as *Ruellia brittaniana*, *R. revoluta*, *R. coccinea*, and *R. simplex*.

**Exhibit
E**

RESOLUTION NUMBER Z-23-018

**RESOLUTION OF THE BOARD OF COUNTY COMMISSIONERS
OF LEE COUNTY, FLORIDA**

WHEREAS, the property owner, Miromar Lakes, LLC, filed an application to amend the zoning and Miromar Lakes DRI Development Order and Mixed Use Planned Development (MPD); and

WHEREAS, a public hearing before the Lee County Zoning Hearing Examiner, Donna Marie Collins, was advertised and held on April 13, 2023. At the conclusion of the hearing, the Hearing Examiner issued a memo to the Applicant and Staff requesting written supplement to the record be submitted to her Office on or before April 20, 2023; and

WHEREAS, the Hearing Examiner gave full consideration to the evidence in the record for Case #DRI2022-00004 and DCI2022-00052, and recommended APPROVAL of the Request; and

WHEREAS, a second public hearing was advertised and held on June 7, 2023 before the Lee County Board of Commissioners; and,

WHEREAS, the Lee County Board of Commissioners gave full and complete consideration to the recommendations of the staff, the Hearing Examiner, the documents on record and the testimony of all interested persons.

NOW, THEREFORE, BE IT RESOLVED BY THE BOARD OF COUNTY COMMISSIONERS:

SECTION A. REQUEST

The applicant filed a request to amend the zoning and DRI development order approvals to convert a portion of commercial intensity to residential density. The amendment calls for reducing approved floor area of retail uses by 125,000 square feet, office uses by 315,000 square feet, research and development uses by 40,000 square feet and hotel by 300 rooms. The request increases residential land uses by 466 single family units.

The property is located in the University Community and Wetlands Future Land Use Categories and is legally described in attached Exhibit A. The request is APPROVED, SUBJECT TO the conditions and deviations specified in Sections B and C below.

SECTION B. CONDITIONS

All references to uses are as defined or listed in the Lee County Land Development Code (LDC).

Condition 1 of Resolution Z-13-020, as amended is revised as follows:

1.a. Development of this project must comply with the following:

- i. Master Concept Plan (MCP). Development must be consistent with the Master Concept Plan entitled "Miromar Lakes DRI Mixed Planned Development" prepared by DeLisi Fitzgerald, Inc., dated on April 14, 2023 attached as Exhibit C, except as modified by the conditions below.

The remainder of Condition 1a. is not changed.

1.b. Approved Development Parameters.

Dwelling units	3,066 units
Retail commercial	125,000 sq. ft
Office commercial	25,000 sq. ft
Research and development	zero
Hotel	150 rooms

Residential uses will consist of 1,592 single family and 1,474 multifamily dwelling units.

The remainder of Condition 1. is not changed.

SECTION C. DEVIATIONS

There are no changes to the deviations approved in Resolution Z-13-020, as amended.

SECTION D. EXHIBITS

The following exhibits are attached to this resolution and incorporated by reference:

- Exhibit A: Legal description of the property
- Exhibit B: Zoning Map (with the subject parcel indicated)
- Exhibit C: The Master Concept Plan
- Exhibit D: Ninth Amendment to Miromar Lakes DRI development order including Map H (Map H dated April 14, 2023)

SECTION E. FINDINGS AND CONCLUSIONS

Based upon its review, the Board of County Commissioners adopts the recommendation of the Hearing Examiner, including the following findings and conclusions:

- 1. The requested amendment to the Miromar Lakes MPD is consistent with the Lee Plan. Lee Plan Goals 2, 4, 5, 15, 77, 95, 135, 158; Objectives 2.1, 2.2, 4.1, 5.1, 77.1, 77.3, 126.2, 135.1, and Policies 1.6.5, 2.2.1, 5.1.1, 5.1.5, 5.1.7, 5.1.10,

15.1.2, 15.1.7, 15.1.11, 15.1.16, 135.1.9, 135.9.5, 135.9.6, 158.1.7; Lee Plan Maps 1-A, 3-D, 4-A, 4-B, and Table 1(a).

2. As conditioned, the amendments to the MPD zoning approvals:
 - a. Are consistent with the LDC or qualifies for deviations. LDC Chapters 2, 10, and 34.
 - b. Are compatible with existing or planned uses in the surrounding area. Lee Plan Objectives 2.1, 158.1, and Policies 5.1.2, 5.1.3, 5.1.5, 135.1.9, 135.9.5, 135.9.6, 158.1.7; LDC §§ 34-411, 34-413, and
 - c. Provides sufficient road access to support proposed development intensity.
 - d. Expected impacts on transportation facilities will be addressed by County regulations and conditions of approval. Lee Plan Objective 39.1, Policies 38.1.1, 38.1.5, 39.1.1; LDC §§ 2-261 *et seq.*, 34-411(d) and (e).
 - e. Will not adversely affect environmentally sensitive areas or natural resources. Lee Plan Goals 60, 61, 77, 123, 125, and Standard 4.1.4.
 - f. Public services and infrastructure will be available to serve the development. Goals 2, 4, 95, Objectives 2.1, 2.2, 4.1, Policies 2.2.1, 95.1.3.
2. The proposed uses are appropriate at the subject location. Lee Plan Goals 2, 5, 15; Objectives 2.1, 2.2, Policies 2.1.1, 2.1.2, 5.1.2, 5.1.5, 5.2.4, 15.1.7, 135.9.5, 135.9.6
3. The County regulations and recommended conditions provide sufficient safeguards to protect the public interest and relate to impacts expected from the proposed development. Lee Plan Policies 5.1.2, 5.1.5, 61.3.8, 135.9.6, 158.1.7; LDC §§ 34-377(a)(3), 34-411 and 34-932(c).
4. Deviations recommended for approval enhance the planned development and preserve public health, safety, and welfare. LDC §§ 34-373(a)(9), 34-377(a)(4).
5. The requested change to the DRI development order is consistent with the Lee Plan and LDC.

SECTION F. SCRIVENER'S ERRORS

The Board intends that this resolution can be renumbered or relettered and typographical errors that do not affect the intent and are consistent with the Board's action can be corrected with the authorization of the County Manager or his designee, without the need for a public hearing.

Commissioner Greenwell made a motion to adopt the foregoing resolution, seconded by Commissioner Ruane. The vote was as follows:


Adopted by unanimous consent.


Kevin Ruane	Aye
Cecil L Pendergrass	Aye
Raymond Sandelli	Aye
Brian Hamman	Aye
Mike Greenwell	Aye

DULY PASSED AND ADOPTED this 7th day of June 2023.

ATTEST:
KEVIN KARNES, CLERK


BOARD OF COUNTY COMMISSIONERS
OF LEE COUNTY, FLORIDA

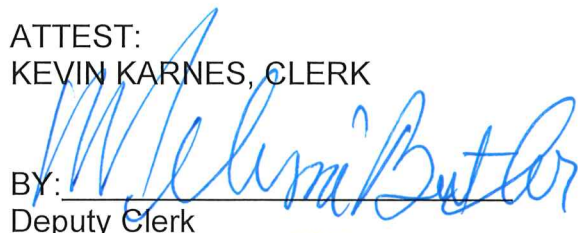BY: 
Deputy Clerk

BY: 
Brian Hamman, Chair



APPROVED AS TO FORM FOR THE
RELiance OF LEE COUNTY ONLY


Michael D. Jacob
Deputy County Attorney
County Attorney's Office

RECEIVED
MINUTES OFFICE
MB
2023 JUN 12 PM 2:34



950 Encore Way • P.O. Box 111629 • Naples, Florida 34108 • Phone: 239.254.2000 • Fax: 239.254.2098

HM PROJECT #2000106X
7/25/2011
REF. DWG. #A-1583-1
PAGE 2 OF 2

LEGAL DESCRIPTION:

A PARCEL OF LAND LOCATED IN A PORTION OF SECTIONS 10, 11, 14, 15 AND 23, TOWNSHIP 46 SOUTH, RANGE 25 EAST, LEE COUNTY, FLORIDA, BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

COMMENCE AT SOUTHEAST CORNER OF SECTION 23, TOWNSHIP 46 SOUTH, RANGE 25 EAST, LEE COUNTY, FLORIDA; THENCE RUN N.89°44'39"W., ALONG THE SOUTH LINE OF SAID SECTION 23, FOR A DISTANCE OF 651.54 FEET TO A POINT ON THE WESTERLY RIGHT-OF-WAY LINE OF BEN HILL GRIFFIN PARKWAY (A.K.A. TREELINE DRIVE), A 150.00 FOOT WIDE RIGHT-OF-WAY, RECORDED IN O.R. BOOK 2745, PAGES 1550 THROUGH 1554 OF THE PUBLIC RECORDS OF LEE COUNTY, FLORIDA AND TO THE POINT OF BEGINNING OF THE PARCEL OF LAND HEREIN DESCRIBED; THENCE CONTINUE N.89°44'39"W. ALONG THE SOUTH LINE OF SAID SECTION 23, FOR A DISTANCE OF 2,921.79 FEET TO A POINT ON THE EASTERLY RIGHT-OF-WAY LINE OF INTERSTATE 75; THENCE RUN N.18°17'51"W. ALONG THE EASTERLY RIGHT-OF-WAY LINE OF INTERSTATE 75, FOR A DISTANCE OF 955.62 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE EASTERLY; THENCE RUN NORTHERLY ALONG THE EASTERLY RIGHT-OF-WAY LINE OF INTERSTATE 75 AND ALONG THE ARC OF SAID CURVE TO THE RIGHT, HAVING A RADIUS OF 17,026.80 FEET, THROUGH A CENTRAL ANGLE OF 04°04'42", SUBTENDED BY A CHORD OF 1,211.72 FEET AT A BEARING OF N.16°15'30"W., FOR A DISTANCE OF 1,211.97 FEET TO THE END OF SAID CURVE; THENCE RUN N.14°13'09"W. ALONG THE EASTERLY RIGHT-OF-WAY LINE OF INTERSTATE 75, FOR A DISTANCE OF 9,126.68 FEET; THENCE RUN N.76°08'54"E., FOR A DISTANCE OF 527.61 FEET; THENCE RUN N.79°14'37"E., FOR A DISTANCE OF 501.77 FEET; THENCE RUN N.84°36'26"E., FOR A DISTANCE OF 384.54 FEET; THENCE RUN S.85°27'53"E., FOR A DISTANCE OF 381.51 FEET; THENCE RUN S.74°31'06"E., FOR A DISTANCE OF 209.92 FEET TO A POINT ON THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY AND A POINT ON A CIRCULAR CURVE, CONCAVE EASTERLY, WHOSE RADIUS POINT BEARS S.69°47'11"E., A DISTANCE OF 3,075.00 FEET THEREFROM; THENCE RUN SOUTHERLY ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY AND ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 3,075.00 FEET, THROUGH A CENTRAL ANGLE OF 23°44'14", SUBTENDED BY A CHORD OF 1,264.85 FEET AT A BEARING OF S.08°20'42"W., FOR A DISTANCE OF 1,273.94 FEET TO THE END OF SAID CURVE; THENCE RUN S.03°31'24"E. ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY, FOR A DISTANCE OF 3,887.79 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE EASTERLY; THENCE RUN SOUTHERLY ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY AND ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 2,000.00 FEET, THROUGH A CENTRAL ANGLE OF 20°33'03", SUBTENDED BY A CHORD OF 713.52 FEET AT A BEARING OF S.13°47'56"E., FOR A DISTANCE OF 717.36 FEET TO THE END OF SAID CURVE; THENCE RUN S.24°04'27"E. ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY, FOR A DISTANCE OF 1,593.09 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE NORTHEASTERLY; THENCE RUN SOUTHEASTERLY ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY AND ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 2,875.00 FEET, THROUGH A CENTRAL ANGLE OF 31°16'49", SUBTENDED BY A CHORD OF 1,550.16 FEET AT A BEARING OF S.39°42'52"E., FOR A DISTANCE OF 1,569.58 FEET TO THE END OF SAID CURVE; THENCE RUN S.55°21'16"E. ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY, FOR A DISTANCE OF

EXHIBIT A

HM PROJECT #2000106X
7/25/2011
REF. DWG. #A-1583-1
PAGE 2 OF 2


1,684.71 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE SOUTHWESTERLY; THENCE RUN SOUTHEASTERLY ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY AND ALONG THE ARC OF SAID CURVE TO THE RIGHT, HAVING A RADIUS OF 1,325.00 FEET, THROUGH A CENTRAL ANGLE OF $54^{\circ}31'33''$, SUBTENDED BY A CHORD OF 1,213.90 FEET AT A BEARING OF $S.28^{\circ}05'29''E.$, FOR A DISTANCE OF 1,260.94 FEET TO THE END OF SAID CURVE; THENCE RUN $S.00^{\circ}49'43''E.$ ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY, FOR A DISTANCE OF 600.19 FEET TO THE POINT OF BEGINNING; CONTAINING 396.652 ACRES, MORE OR LESS.

BEARINGS SHOWN HEREON REFER TO THE SOUTH LINE OF SECTION 23, TOWNSHIP 46 SOUTH, RANGE 25 EAST, OF LEE COUNTY, FLORIDA AS BEING $N.89^{\circ}44'39''W.$

THIS SKETCH AND LEGAL HAS BEEN PREPARED BASED UPON THE BANKS ENGINEERING, INC. PARCEL DESCRIPTIONS AS SHOWN ON DRAWINGS 1155SR, SHEETS 1 THROUGH 4, DATED 4/10/2000

HOLE MONTES, INC.
CERTIFICATE OF AUTHORIZATION NUMBER LB 1772

BY Thomas M. Murphy P.S.M. #5628
THOMAS M. MURPHY STATE OF FLORIDA

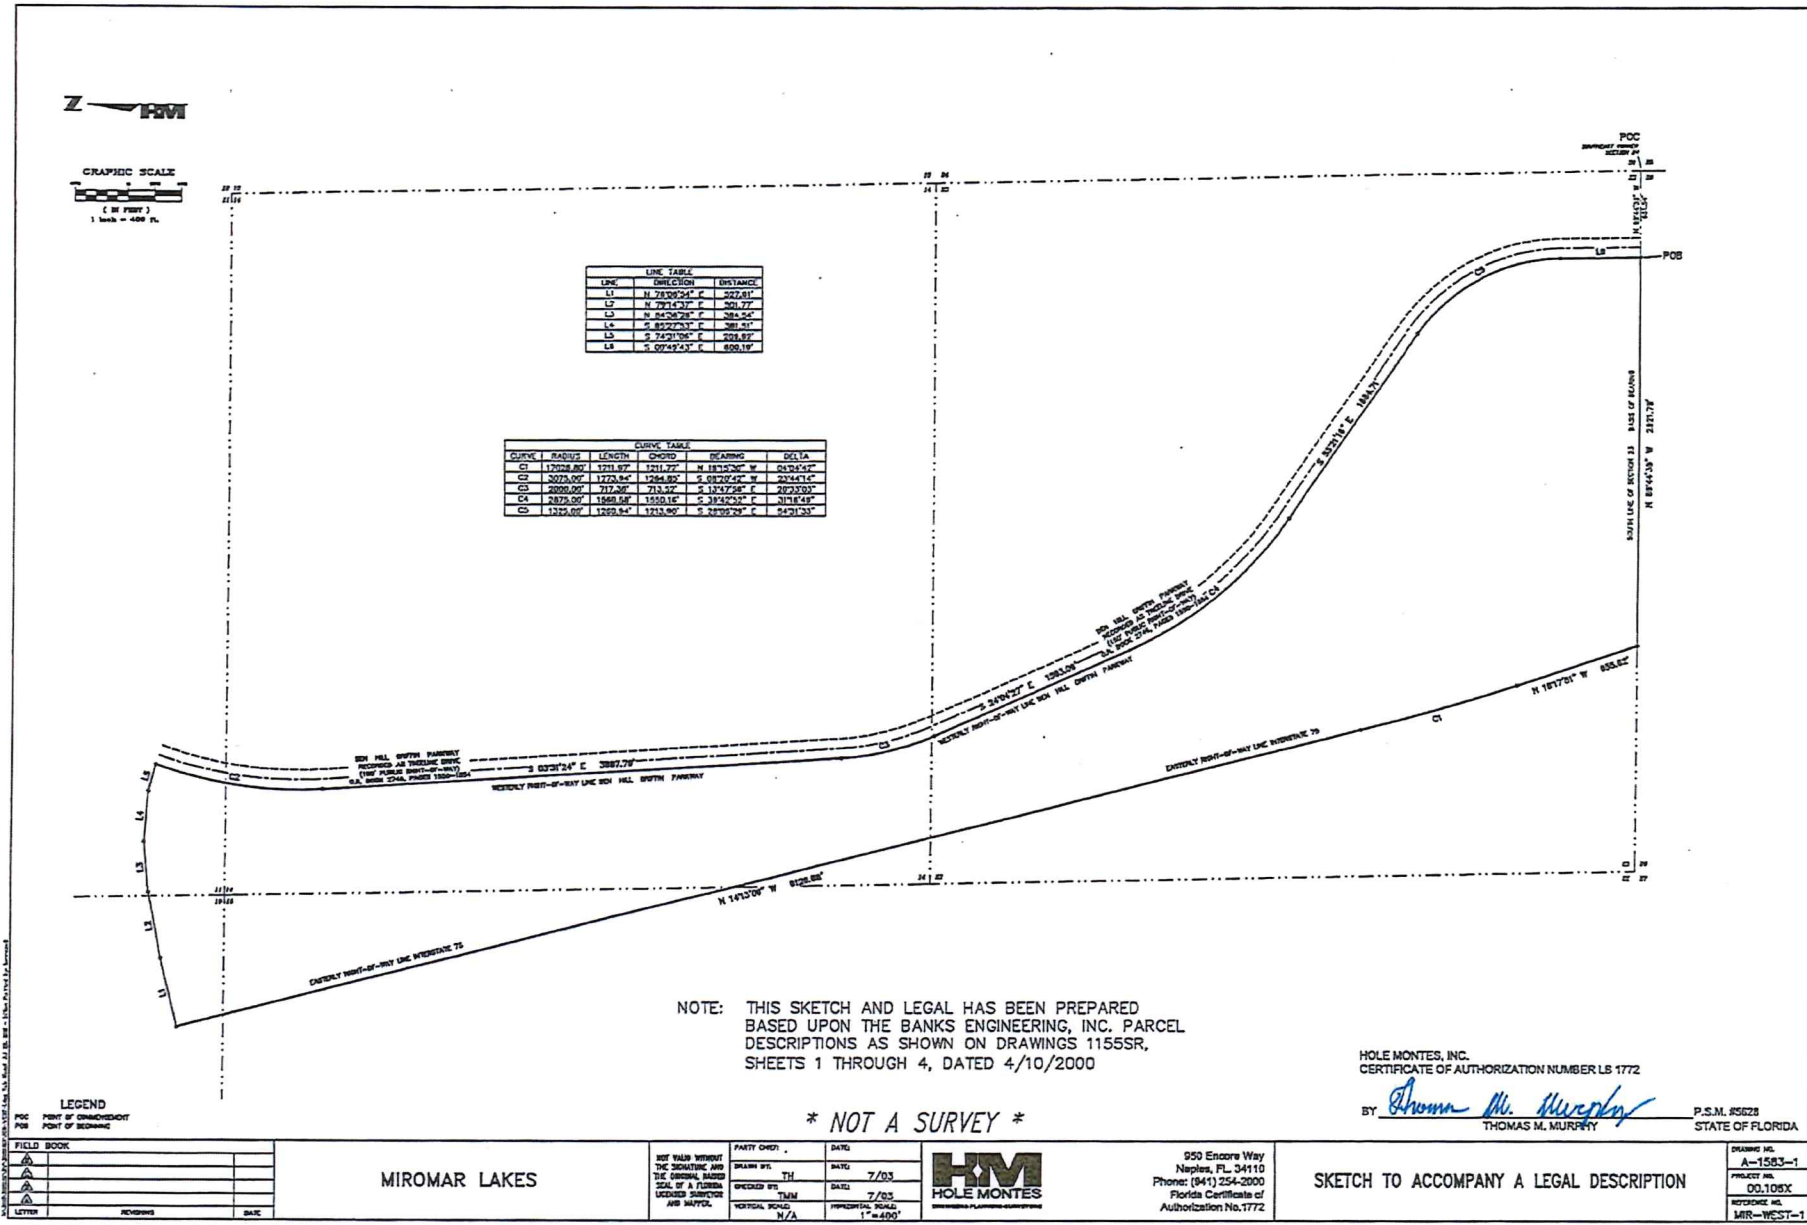



950 Encore Way • Naples, Florida 34110 • Phone 239.254-2000 • Fax: 239.985.2099

HM PROJECT # 2000106X

2/09/2023

REF. DWG. A-1582-2

PAGE 1 OF 4

LEGAL DESCRIPTION:

A PARCEL OF LAND LOCATED IN A PORTION OF SECTIONS 11, 12, 13, 14, 23, AND 24, TOWNSHIP 46 SOUTH, RANGE 25 EAST, AND SECTION 18, TOWNSHIP 46 SOUTH, RANGE 26 EAST, LEE COUNTY, FLORIDA, BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

BEGIN AT THE SOUTHEAST CORNER OF SECTION 23, TOWNSHIP 46 SOUTH, RANGE 25 EAST, LEE COUNTY, FLORIDA; THENCE RUN N.89°44'39"W. ALONG THE SOUTH LINE OF SAID SECTION 23, FOR A DISTANCE OF 501.52 FEET TO A POINT ON THE EASTERLY RIGHT-OF-WAY LINE OF BEN HILL GRIFFIN PARKWAY (A.K.A. TREELINE DRIVE), A 150 FOOT WIDE RIGHT-OF-WAY, RECORDED IN O.R. BOOK 2745, PAGES 1550 THROUGH 1554 OF THE PUBLIC RECORDS OF LEE COUNTY, FLORIDA; THENCE RUN N.00°49'43"W. ALONG SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 603.03 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE SOUTHWESTERLY; THENCE RUN NORTHWESTERLY ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE AND ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 1,475.00 FEET, THROUGH A CENTRAL ANGLE OF 54°31'33", SUBTENDED BY A CHORD OF 1,351.32 FEET AT A BEARING OF N.28°05'29"W., FOR A DISTANCE OF 1,403.69 FEET TO THE END OF SAID CURVE; THENCE RUN N.55°21'16"W. ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 423.96 FEET; THENCE RUN N.38°37'17"E., FOR A DISTANCE OF 180.44 FEET; THENCE RUN N.40°45'20"W., FOR A DISTANCE OF 1,287.06 FEET; THENCE RUN N.51°22'43"W., FOR A DISTANCE OF 275.00 FEET; THENCE RUN N.20°50'23"W., FOR A DISTANCE OF 170.61 FEET; THENCE RUN N.03°26'59"W., FOR A DISTANCE OF 196.02 FEET; THENCE RUN N.49°19'44"E., FOR A DISTANCE OF 344.71 FEET; THENCE RUN S.54°09'13"E., FOR A DISTANCE OF 1,057.59 FEET; THENCE RUN S.05°08'14"W., FOR A DISTANCE OF 497.67 FEET; THENCE RUN S.87°48'55"E., FOR A DISTANCE OF 1,464.61 FEET; THENCE RUN N.88°17'13"E., FOR A DISTANCE OF 233.73 FEET; THENCE RUN S.31°47'37"E., FOR A DISTANCE OF 631.21 FEET; THENCE RUN N.62°11'53"E., FOR A DISTANCE OF 2,704.05 FEET; THENCE RUN N.21°20'50"E., FOR A DISTANCE OF 1,025.79 FEET; THENCE RUN N.02°13'31"W., FOR A DISTANCE OF 339.05 FEET; THENCE RUN N.73°40'08"E., FOR A DISTANCE OF 497.73 FEET; THENCE RUN N.84°27'10"E., FOR A DISTANCE OF 648.96 FEET; THENCE RUN N.20°19'20"W., FOR A DISTANCE OF 155.37 FEET; THENCE RUN N.04°47'10"W., FOR A DISTANCE OF 137.24 FEET; THENCE RUN N.10°20'25"E., FOR A DISTANCE OF 89.58 FEET; THENCE RUN N.88°40'48"W., FOR A DISTANCE OF 108.51 FEET; THENCE RUN N.35°22'24"E., FOR A DISTANCE OF 61.49 FEET; THENCE RUN N.24°10'35"E., FOR A DISTANCE OF 16.58 FEET; THENCE RUN N.16°58'33"E., FOR A DISTANCE OF 22.30 FEET; THENCE RUN N.01°25'10"W., FOR A DISTANCE OF 17.20 FEET; THENCE RUN N.02°00'52"E., FOR A DISTANCE OF 22.73 FEET; THENCE RUN N.10°34'22"E., FOR A DISTANCE OF 27.69 FEET; THENCE RUN N.08°31'29"E., FOR A DISTANCE OF 27.56 FEET; THENCE RUN N.04°17'29"W., FOR A DISTANCE OF 27.54 FEET; THENCE RUN N.03°50'00"E., FOR A DISTANCE OF 32.88 FEET; THENCE RUN N.05°16'54"E., FOR A DISTANCE OF 34.74 FEET; THENCE RUN N.14°36'53"W., FOR A DISTANCE OF 12.71 FEET; THENCE RUN N.49°59'45"W., FOR A DISTANCE OF 15.95 FEET; THENCE RUN N.67°08'11"W., FOR A DISTANCE OF 67.75 FEET; THENCE RUN N.67°33'34"E., FOR A DISTANCE OF 68.16 FEET; THENCE RUN N.57°34'58"E., FOR A DISTANCE OF 15.64 FEET; THENCE RUN

HM PROJECT # 2000106X

2/09/2023

REF. DWG. A-1582-2

PAGE 2 OF 4

N.53°45'20"E., FOR A DISTANCE OF 13.61 FEET; THENCE RUN N.58°32'02"E., FOR A DISTANCE OF 11.22 FEET; THENCE RUN N.54°40'50"E., FOR A DISTANCE OF 13.85 FEET; THENCE RUN N.49°36'55"E., FOR A DISTANCE OF 19.09 FEET; THENCE RUN N.37°17'03"E., FOR A DISTANCE OF 14.40 FEET; THENCE RUN N.25°04'13"E., FOR A DISTANCE OF 22.74 FEET; THENCE RUN N.30°25'33"E., FOR A DISTANCE OF 40.77 FEET; THENCE RUN S.70°47'07"E., FOR A DISTANCE OF 50.50 FEET; THENCE RUN N.19°32'42"E., FOR A DISTANCE OF 63.26 FEET; THENCE RUN N.62°41'55"E., FOR A DISTANCE OF 33.33 FEET; THENCE RUN N.60°03'38"E., FOR A DISTANCE OF 27.79 FEET; THENCE RUN N.68°56'32"E., FOR A DISTANCE OF 33.67 FEET; THENCE RUN N.69°27'09"E., FOR A DISTANCE OF 39.32 FEET; THENCE RUN N.76°09'54"E., FOR A DISTANCE OF 38.69 FEET; THENCE RUN N.84°37'56"E., FOR A DISTANCE OF 35.30 FEET; THENCE RUN N.71°01'39"E., FOR A DISTANCE OF 36.05 FEET; THENCE RUN N.56°16'09"E., FOR A DISTANCE OF 22.32 FEET; THENCE RUN N.54°45'23"E., FOR A DISTANCE OF 72.52 FEET; THENCE RUN N.43°40'48"E., FOR A DISTANCE OF 14.33 FEET; THENCE RUN N.36°37'28"E., FOR A DISTANCE OF 31.97 FEET; THENCE RUN N.16°15'53"E., FOR A DISTANCE OF 27.07 FEET; THENCE RUN N.00°14'32"W., FOR A DISTANCE OF 18.58 FEET; THENCE RUN N.01°01'18"W., FOR A DISTANCE OF 22.80 FEET; THENCE RUN N.11°30'29"E., FOR A DISTANCE OF 41.66 FEET; THENCE RUN N.25°25'32"E., FOR A DISTANCE OF 18.52 FEET; THENCE RUN N.29°13'14"E., FOR A DISTANCE OF 12.77 FEET; THENCE RUN N.09°42'26"E., FOR A DISTANCE OF 13.86 FEET; THENCE RUN N.10°10'17"W., FOR A DISTANCE OF 8.24 FEET; THENCE RUN N.25°29'33"W., FOR A DISTANCE OF 11.70 FEET; THENCE RUN N.71°45'42"W., FOR A DISTANCE OF 21.85 FEET; THENCE RUN N.59°03'27"W., FOR A DISTANCE OF 13.21 FEET; THENCE RUN N.37°04'03"W., FOR A DISTANCE OF 27.24 FEET; THENCE RUN N.00°38'43"W., FOR A DISTANCE OF 28.85 FEET; THENCE RUN N.10°12'59"E., FOR A DISTANCE OF 35.02 FEET; THENCE RUN N.01°52'01"E., FOR A DISTANCE OF 31.20 FEET; THENCE RUN N.05°34'22"E., FOR A DISTANCE OF 13.39 FEET; THENCE RUN N.01°01'36"W., FOR A DISTANCE OF 30.61 FEET; THENCE RUN N.15°40'00"W., FOR A DISTANCE OF 27.26 FEET; THENCE RUN N.22°54'25"W., FOR A DISTANCE OF 20.46 FEET; THENCE RUN N.20°19'15"W., FOR A DISTANCE OF 21.36 FEET; THENCE RUN N.17°17'45"W., FOR A DISTANCE OF 18.27 FEET; THENCE RUN N.25°34'23"W., FOR A DISTANCE OF 16.79 FEET; THENCE RUN N.15°41'23"W., FOR A DISTANCE OF 49.27 FEET; THENCE RUN N.00°29'10"W., FOR A DISTANCE OF 19.63 FEET; THENCE RUN S.65°22'51"W., FOR A DISTANCE OF 893.03 FEET; THENCE RUN S.62°02'33"W., FOR A DISTANCE OF 548.61 FEET; THENCE RUN N.84°00'27"W., FOR A DISTANCE OF 113.75 FEET; THENCE RUN S.73°01'40"W., FOR A DISTANCE OF 332.94 FEET; THENCE RUN S.88°47'09"W., FOR A DISTANCE OF 386.35 FEET; THENCE RUN N.01°12'51"W., FOR A DISTANCE OF 733.65 FEET; THENCE RUN N.75°24'23"E., FOR A DISTANCE OF 644.66 FEET; THENCE RUN N.02°55'16"W., FOR A DISTANCE OF 211.27 FEET; THENCE RUN N.19°49'36"E., FOR A DISTANCE OF 960.80 FEET; THENCE CONTINUE N.19°49'36"E., FOR A DISTANCE OF 21.27 FEET; THENCE RUN S.88°44'00"W., FOR A DISTANCE OF 3,706.01 FEET; THENCE RUN N.00°58'18"W., FOR A DISTANCE OF 320.16 FEET; THENCE RUN S.89°01'42"W., FOR A DISTANCE OF 450.42 FEET; THENCE RUN S.03°10'23"E., FOR A DISTANCE OF 430.66 FEET; THENCE RUN S.88°17'12"W., FOR A DISTANCE OF 1,027.71 FEET; THENCE RUN S.01°42'48"E., FOR A DISTANCE OF 306.15 FEET; THENCE RUN S.47°45'12"W., FOR A DISTANCE OF 1,504.06 FEET; THENCE RUN S.88°27'56"W., FOR A DISTANCE OF 1,780.04 FEET TO A POINT ON THE SAID EASTERLY RIGHT-OF-WAY LINE; THENCE RUN N.03°31'24"W. ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 34.30 FEET; THENCE RUN N81°31'53"E FOR A DISTANCE OF 59.36 FEET; THENCE RUN N86°42'41"E FOR A DISTANCE OF 91.78 FEET; THENCE RUN N50°02'46"E FOR A DISTANCE OF 136.19 FEET; THENCE RUN N58°59'16"E FOR A DISTANCE OF 150.29 FEET; THENCE RUN

HM PROJECT # 2000106X

2/09/2023

REF. DWG. A-1582-2

PAGE 3 OF 4

N03°34'13"E FOR A DISTANCE OF 280.42 FEET; THENCE RUN N44°21'15"E FOR A DISTANCE OF 65.32 FEET; THENCE RUN N85°08'17"E FOR A DISTANCE OF 193.00 FEET; THENCE RUN N53°18'11"E FOR A DISTANCE OF 221.46 FEET; THENCE RUN N85°09'35"E FOR A DISTANCE OF 62.26 FEET; THENCE RUN S40°09'41"E FOR A DISTANCE OF 165.57 FEET; THENCE RUN N70°32'55"E FOR A DISTANCE OF 188.24 FEET, TO THE BEGINNING OF A NON-TANGENTIAL CIRCULAR CURVE TO THE RIGHT; HAVING A RADIUS OF 850.00 FEET, THROUGH A CENTRAL ANGLE OF 21°55'50" AND BEING SUBTENDED BY A CHORD OF 323.36 FEET AT A BEARING OF N68°42'47"W, FOR AN ARC LENGTH OF 325.34 FEET; THENCE RUN N57°44'54"W FOR A DISTANCE OF 288.84 FEET, TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE TO THE LEFT; HAVING A RADIUS OF 650.00 FEET, THROUGH A CENTRAL ANGLE OF 35°46'31" AND BEING SUBTENDED BY A CHORD OF 399.30 FEET AT A BEARING OF N75°38'09"W, FOR AN ARC LENGTH OF 405.86 FEET; THENCE RUN S86°28'35"W FOR A DISTANCE OF 239.42 FEET, TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE TO THE LEFT; HAVING A RADIUS OF 50.00 FEET, THROUGH A CENTRAL ANGLE OF 90°00'00" AND BEING SUBTENDED BY A CHORD OF 70.71 FEET AT A BEARING OF S41°28'35"W, FOR AN ARC LENGTH OF 78.54 FEET TO A POINT ON THE SAID EASTERLY RIGHT-OF-WAY LINE; THENCE RUN N.03°31'24"W. ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 2370.30 FEET; TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE EASTERLY; THENCE RUN NORTHERLY ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE AND ALONG THE ARC OF SAID CURVE TO THE RIGHT, HAVING A RADIUS OF 2,925.00 FEET, THROUGH A CENTRAL ANGLE OF 23°44'13", SUBTENDED BY A CHORD OF 1,203.14 FEET AT A BEARING OF N.08°20'42"E., FOR A DISTANCE OF 1,211.79 FEET TO THE END OF SAID CURVE; THENCE RUN N.20°12'49"E. ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 473.55 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE WESTERLY; THENCE RUN NORTHERLY ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE AND ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 10,075.00 FEET, THROUGH A CENTRAL ANGLE OF 19°11'28", SUBTENDED BY A CHORD OF 3,358.85 FEET AT A BEARING OF N.10°37'06"E., FOR A DISTANCE OF 3,374.60 FEET TO THE END OF SAID CURVE; THENCE RUN N.01°01'21"E. ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 909.75 FEET; THENCE RUN S.89°42'24"E., FOR A DISTANCE OF 1,049.81 FEET; THENCE RUN S.01°00'21"E., FOR A DISTANCE OF 847.76 FEET; THENCE RUN S.04°19'45"W., FOR A DISTANCE OF 1,091.78 FEET; THENCE RUN S.00°39'26"E., FOR A DISTANCE OF 1,432.24 FEET; THENCE RUN S.00°16'17"E., FOR A DISTANCE OF 606.52 FEET; THENCE RUN N.88°47'46"E., FOR A DISTANCE OF 376.79 FEET; THENCE RUN S.40°48'12"E., FOR A DISTANCE OF 322.81 FEET; THENCE RUN S.19°01'17"E., FOR A DISTANCE OF 249.77 FEET; THENCE RUN S.88°53'28"E., FOR A DISTANCE OF 216.94 FEET; THENCE RUN S.24°26'51"E., FOR A DISTANCE OF 150.17 FEET; THENCE RUN S.77°09'26"E., FOR A DISTANCE OF 573.01 FEET; THENCE RUN S.88°10'13"E., FOR A DISTANCE OF 1,363.08 FEET; THENCE RUN S.19°42'28"E., FOR A DISTANCE OF 157.73 FEET; THENCE RUN S.87°09'14"E., FOR A DISTANCE OF 469.81 FEET; THENCE RUN N.88°02'24"E., FOR A DISTANCE OF 612.22 FEET; THENCE RUN S.21°30'12"E., FOR A DISTANCE OF 81.17 FEET; THENCE RUN N.88°10'32"E., FOR A DISTANCE OF 846.89 FEET; THENCE RUN N.88°10'32"E., FOR A DISTANCE OF 1,137.62 FEET; THENCE RUN S.20°09'57"E., FOR A DISTANCE OF 344.08 FEET; THENCE RUN S.89°48'06"E., FOR A DISTANCE OF 80.00 FEET; THENCE RUN S.20°09'57"E., FOR A DISTANCE OF 807.57 FEET; THENCE RUN S.15°43'44"E., FOR A DISTANCE OF 978.45 FEET; THENCE RUN S.89°46'43"E., FOR A DISTANCE OF 516.03 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE SOUTHWESTERLY; THENCE RUN SOUTHEASTERLY ALONG THE ARC OF SAID CURVE TO THE RIGHT, HAVING A RADIUS OF 500.00 FEET, THROUGH A CENTRAL ANGLE OF 88°55'56", SUBTENDED BY A CHORD OF 700.49

HM PROJECT # 2000106X

2/09/2023

REF. DWG. A-1582-2

PAGE 4 OF 4

FEET AT A BEARING OF S.45°18'45"E., FOR A DISTANCE OF 776.08 FEET TO THE END OF SAID CURVE; THENCE RUN S.00°50'47"E., FOR A DISTANCE OF 1,447.68 FEET; THENCE RUN S.09°57'20"W., FOR A DISTANCE OF 533.57 FEET TO A POINT ON THE EAST LINE OF SECTION 13, TOWNSHIP 46 SOUTH, RANGE 25 EAST; THENCE RUN S.00°50'47"E. ALONG THE EAST LINE OF SAID SECTION 13, FOR A DISTANCE OF 957.10 FEET TO THE NORTHWEST CORNER OF SECTION 24, TOWNSHIP 46 SOUTH, RANGE 25 EAST; THENCE RUN S.00°50'13"E. ALONG THE EAST LINE OF THE NORTHEAST ONE-QUARTER OF SADI SECTION 24, FOR A DISTANCE OF 2,639.78 FEET TO THE EAST QUARTER CORNER OF SAID SECTION 24; THENCE RUN S.00°48'26"E. ALONG THE EAST LINE OF THE SOUTHEAST ONE-QUARTER OF SAID SECTION 24, FOR A DISTANCE OF 2,643.97 FEET TO THE SOUTHEAST CORNER OF SAID SECTION 24; THENCE RUN S.89°28'32"W. ALONG THE SOUTH LINE OF SAID SECTION 24, FOR A DISTANCE OF 5,249.70 FEET TO THE POINT OF BEGINNING; CONTAINING 1,396.66 ACRES, MORE OR LESS.

BEARINGS SHOWN HEREON REFER TO THE SOUTH LINE OF SECTION 24, TOWNSHIP 46 SOUTH, RANGE 25 EAST, LEE COUNTY, FLORIDA AS BEING S.89°28'32"W.



THIS SKETCH AND LEGAL HAS BEEN PREPARED BASED UPON THE BANKS ENGINEERING, INC. PARCEL DESCRIPTIONS AS SHOWN ON DRAWINGS 1155SR, SHEETS 1 THROUGH 4, DATED 4/10/2000 AND DRAWINGS 1418SR, SHEETS 1 AND 2, DATED 7/13/2000.

HOLE MONTES, INC.


CERTIFICATE OF AUTHORIZATION NUMBER LB 1772

BY _____ P.S.M. #5628
THOMAS M. MURPHY STATE OF FLORIDA

Z — ZMT



SECTION DETAIL 1
SCALE 1" = 200'

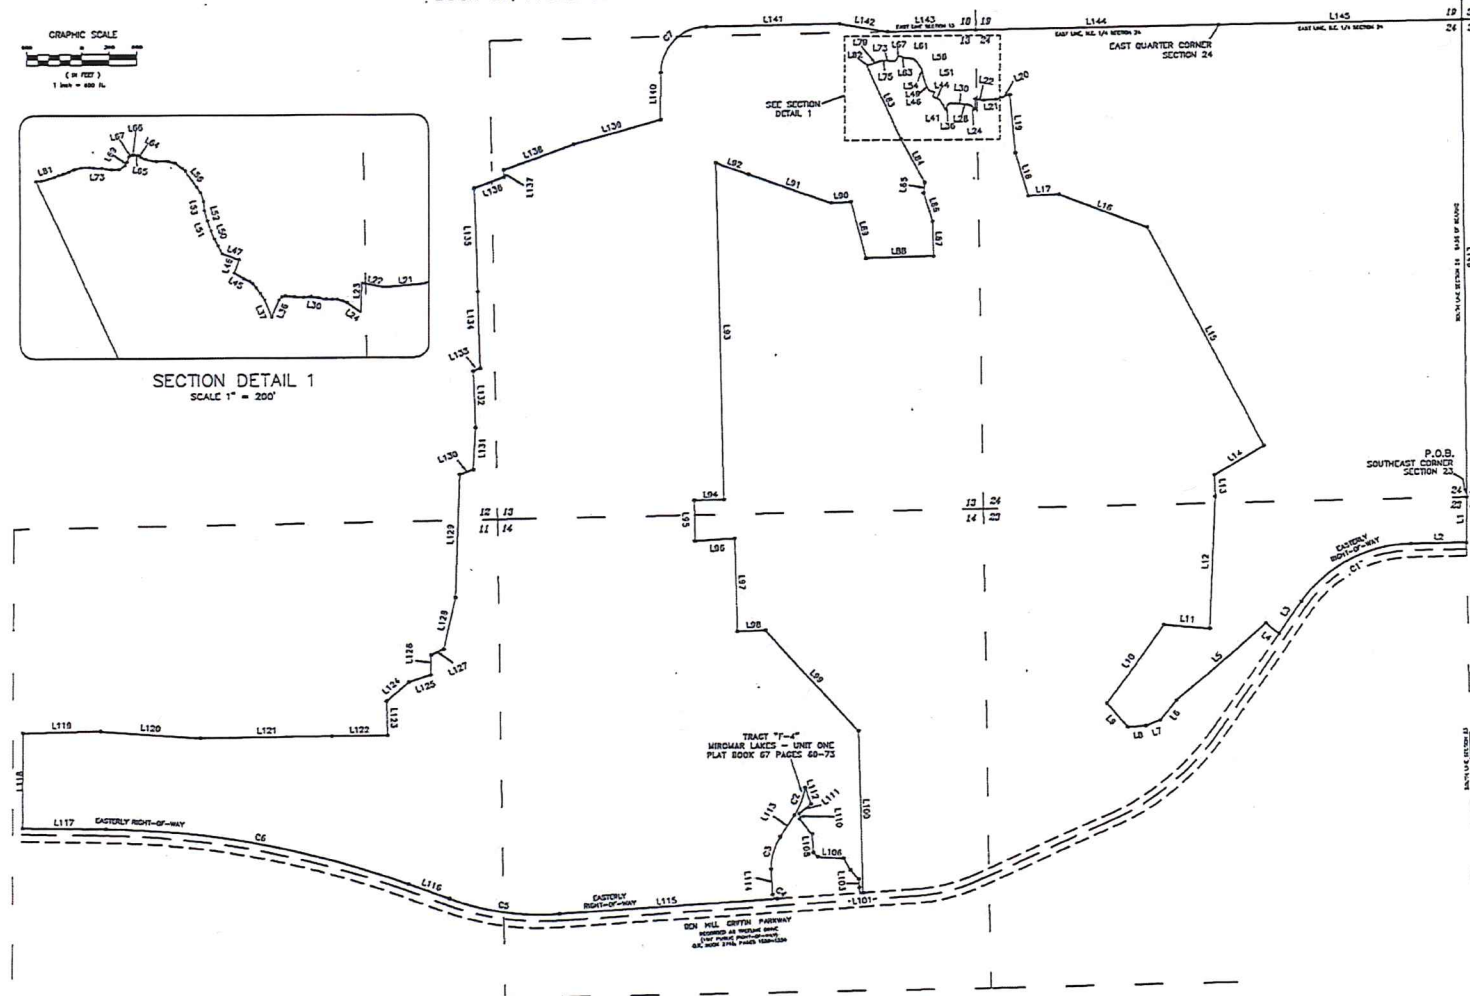

* NOT A SURVEY *

LINE	WAVELENGTH	FLUX DENSITY
1	1.070 000 00	761.25
2	1.070 000 00	761.25
3	1.070 000 00	761.25
4	1.070 000 00	761.25
5	1.070 000 00	761.25
6	1.070 000 00	761.25
7	1.070 000 00	761.25
8	1.070 000 00	761.25
9	1.070 000 00	761.25
10	1.070 000 00	761.25
11	1.070 000 00	761.25
12	1.070 000 00	761.25
13	1.070 000 00	761.25
14	1.070 000 00	761.25
15	1.070 000 00	761.25
16	1.070 000 00	761.25
17	1.070 000 00	761.25
18	1.070 000 00	761.25
19	1.070 000 00	761.25
20	1.070 000 00	761.25
21	1.070 000 00	761.25
22	1.070 000 00	761.25
23	1.070 000 00	761.25
24	1.070 000 00	761.25
25	1.070 000 00	761.25
26	1.070 000 00	761.25
27	1.070 000 00	761.25
28	1.070 000 00	761.25
29	1.070 000 00	761.25
30	1.070 000 00	761.25
31	1.070 000 00	761.25
32	1.070 000 00	761.25
33	1.070 000 00	761.25
34	1.070 000 00	761.25
35	1.070 000 00	761.25
36	1.070 000 00	761.25
37	1.070 000 00	761.25
38	1.070 000 00	761.25
39	1.070 000 00	761.25
40	1.070 000 00	761.25
41	1.070 000 00	761.25
42	1.070 000 00	761.25
43	1.070 000 00	761.25
44	1.070 000 00	761.25
45	1.070 000 00	761.25
46	1.070 000 00	761.25
47	1.070 000 00	761.25
48	1.070 000 00	761.25
49	1.070 000 00	761.25
50	1.070 000 00	761.25
51	1.070 000 00	761.25
52	1.070 000 00	761.25
53	1.070 000 00	761.25
54	1.070 000 00	761.25
55	1.070 000 00	761.25
56	1.070 000 00	761.25
57	1.070 000 00	761.25
58	1.070 000 00	761.25
59	1.070 000 00	761.25
60	1.070 000 00	761.25
61	1.070 000 00	761.25
62	1.070 000 00	761.25
63	1.070 000 00	761.25
64	1.070 000 00	761.25
65	1.070 000 00	761.25
66	1.070 000 00	761.25
67	1.070 000 00	761.25
68	1.070 000 00	761.25
69	1.070 000 00	761.25
70	1.070 000 00	761.25
71	1.070 000 00	761.25
72	1.070 000 00	761.25
73	1.070 000 00	761.25
74	1.070 000 00	761.25
75	1.070 000 00	761.25
76	1.070 000 00	761.25
77	1.070 000 00	761.25
78	1.070 000 00	761.25
79	1.070 000 00	761.25
80	1.070 000 00	761.25
81	1.070 000 00	761.25
82	1.070 000 00	761.25
83	1.070 000 00	761.25
84	1.070 000 00	761.25
85	1.070 000 00	761.25
86	1.070 000 00	761.25
87	1.070 000 00	761.25
88	1.070 000 00	761.25
89	1.070 000 00	761.25
90	1.070 000 00	761.25
91	1.070 000 00	761.25
92	1.070 000 00	761.25
93	1.070 000 00	761.25
94	1.070 000 00	761.25
95	1.070 000 00	761.25
96	1.070 000 00	761.25
97	1.070 000 00	761.25
98	1.070 000 00	761.25
99	1.070 000 00	761.25
100	1.070 000 00	761.25

LINE	REASON	DISCOUNT
L74	6 00 24 30	1
L75	6 00 24 30	1
L76	6 00 24 30	1
L77	6 00 24 30	1
L78	6 00 24 30	1
L79	6 00 24 30	1
L80	6 00 24 30	1
L81	6 00 24 30	1
L82	6 00 24 30	1
L83	6 00 24 30	1
L84	6 00 24 30	1
L85	6 00 24 30	1
L86	6 00 24 30	1
L87	6 00 24 30	1
L88	6 00 24 30	1
L89	6 00 24 30	1
L90	6 00 24 30	1
L91	6 00 24 30	1
L92	6 00 24 30	1
L93	6 00 24 30	1
L94	6 00 24 30	1
L95	6 00 24 30	1
L96	6 00 24 30	1
L97	6 00 24 30	1
L98	6 00 24 30	1
L99	6 00 24 30	1
L100	6 00 24 30	1
L101	6 00 24 30	1
L102	6 00 24 30	1
L103	6 00 24 30	1
L104	6 00 24 30	1
L105	6 00 24 30	1
L106	6 00 24 30	1
L107	6 00 24 30	1
L108	6 00 24 30	1
L109	6 00 24 30	1
L110	6 00 24 30	1
L111	6 00 24 30	1
L112	6 00 24 30	1
L113	6 00 24 30	1
L114	6 00 24 30	1
L115	6 00 24 30	1
L116	6 00 24 30	1
L117	6 00 24 30	1
L118	6 00 24 30	1
L119	6 00 24 30	1
L120	6 00 24 30	1
L121	6 00 24 30	1
L122	6 00 24 30	1
L123	6 00 24 30	1
L124	6 00 24 30	1
L125	6 00 24 30	1
L126	6 00 24 30	1
L127	6 00 24 30	1
L128	6 00 24 30	1
L129	6 00 24 30	1
L130	6 00 24 30	1
L131	6 00 24 30	1
L132	6 00 24 30	1
L133	6 00 24 30	1
L134	6 00 24 30	1
L135	6 00 24 30	1
L136	6 00 24 30	1
L137	6 00 24 30	1
L138	6 00 24 30	1
L139	6 00 24 30	1
L140	6 00 24 30	1
L141	6 00 24 30	1
L142	6 00 24 30	1
L143	6 00 24 30	1
L144	6 00 24 30	1
L145	6 00 24 30	1
L146	6 00 24 30	1
L147	6 00 24 30	1
L148	6 00 24 30	1
L149	6 00 24 30	1
L150	6 00 24 30	1

CUTTING	RADIUS	DELTA ANGLE	CHORD LENGTH	CHORD BEARING	ARC LENGTH
C1	1475.00	54.31 33	1351.32	N 28°02' 29" W	4023.68
C2	930.00	21.55 50	352.36	N 84°42' 49" W	3253.54
C3	930.00	39.46 51	298.30	N 75°25' 00" W	4020.60
C4	50.00	20.00 00	86.31	S 64°42' 49" E	495.68
C5	2725.00	23.64 52	1703.14	N 64°42' 49" E	1191.27
C6	1602.50	19.77 52	1332.62	N 60°39' 50" E	3374.50
C7	1602.50	20.00 00	200.48	S 49°38' 45" E	279.08

LEGEND

POC	POINT OF COMMENCEMENT
ROB	POINT OF BEGINNING

SKETCH & LEGAL

NOT VALID WITHOUT
THE SIGNATURE AND
THE ORIGINAL
SEAL OF A FLORIDA
LICENSED SURVEYOR
AND MAPPER.

PARTY CHIEF:	DATE:
DRAWN BY: JNH	DATE: 2/3/2023
SHEET 1	OF SHEET 5
SLC-TWY-RCE	



6200 Whiskey Creek Dr.
 Ft. Myers, FL 33919
 Phone: (238) 985-1200
 Florida Certificate of
 Authorization No. 1772

MIROMAR LAKES
SKETCH FOR LEGAL DESCRIPTION

DRAWING NO.	A-1582-2
PROJECT NO.	2023.517
FILE NAME	2023517 2A.dwg

0 0.5 1
Miles



LEGEND

- C1 COMMERCIAL 1
CS COMMERCIAL SOUTH
MU MIXED USE
R RESIDENTIAL
GC GOLF COURSE
R 2 RESIDENTIAL 2
L CONCEPTUAL LAKE LOCATION
CO CONSERVATION AREA
DEVIATION
* CONCEPTUAL CLUB LOCATIONS
* COP CONSUMPTION ON PREMISES
— CONCEPTUAL GOLF TRAIL OR BOARDWALK
↔ BHG PKWY ACCESS

LAND USE SUMMARY


DESCRIPTION	UNITS
RESIDENTIAL (R, R 2, MU, C1 AND CS) (INCLUDES LAKES)	
SINGLE FAMILY UNITS	1,592 UNITS
MULTI FAMILY UNITS	1,474 UNITS
TOTAL UNITS	3,066 UNITS
COMMERCIAL/OFFICE/HOTEL (C1, CS AND MU) RETAIL COMMERCIAL (GFA)	125,000 SQ FT
HOTEL ROOMS	150 ROOMS
OFFICE (GFA)	25,000 SQ FT

LAND USE AREA SUMMARY

DESCRIPTION	ACRES
RESIDENTIAL (R, R 2, AND GC)	963
COMMERCIAL/OFFICE/HOTEL (C1 AND CS)	84
MIXED USE (MU)	109
LAKES/MISCELLANEOUS RECREATION/BUFFERS	282.3 ±
CONSERVATION AREAS "CO" (INCLUDES WETLAND BUFFERS)	344.7 ±
TOTAL ACRES	1,793

NOTES:

- NORTHERN CROSSING OF THE CONSERVATION AREA WILL BE REMOVED, CONTINGENT ON SUCCESSFUL PERMITTING OF THE SOUTHERN CROSSING.
- ACCESS POINTS TO THE FUTURE ESTERO PARKWAY EXTENSION EAST OF BEN HILL GRIFFIN PARKWAY ARE LIMITED TO THE THREE (3) LOCATIONS SHOWN ON THE MCP, AND WILL GENERALLY ALIGN WITH EXISTING GOLF COURSE HOLES AND MAINWARD CROSSING WITHIN THE GRADEZZA COMMUNITY TO THE SOUTH.

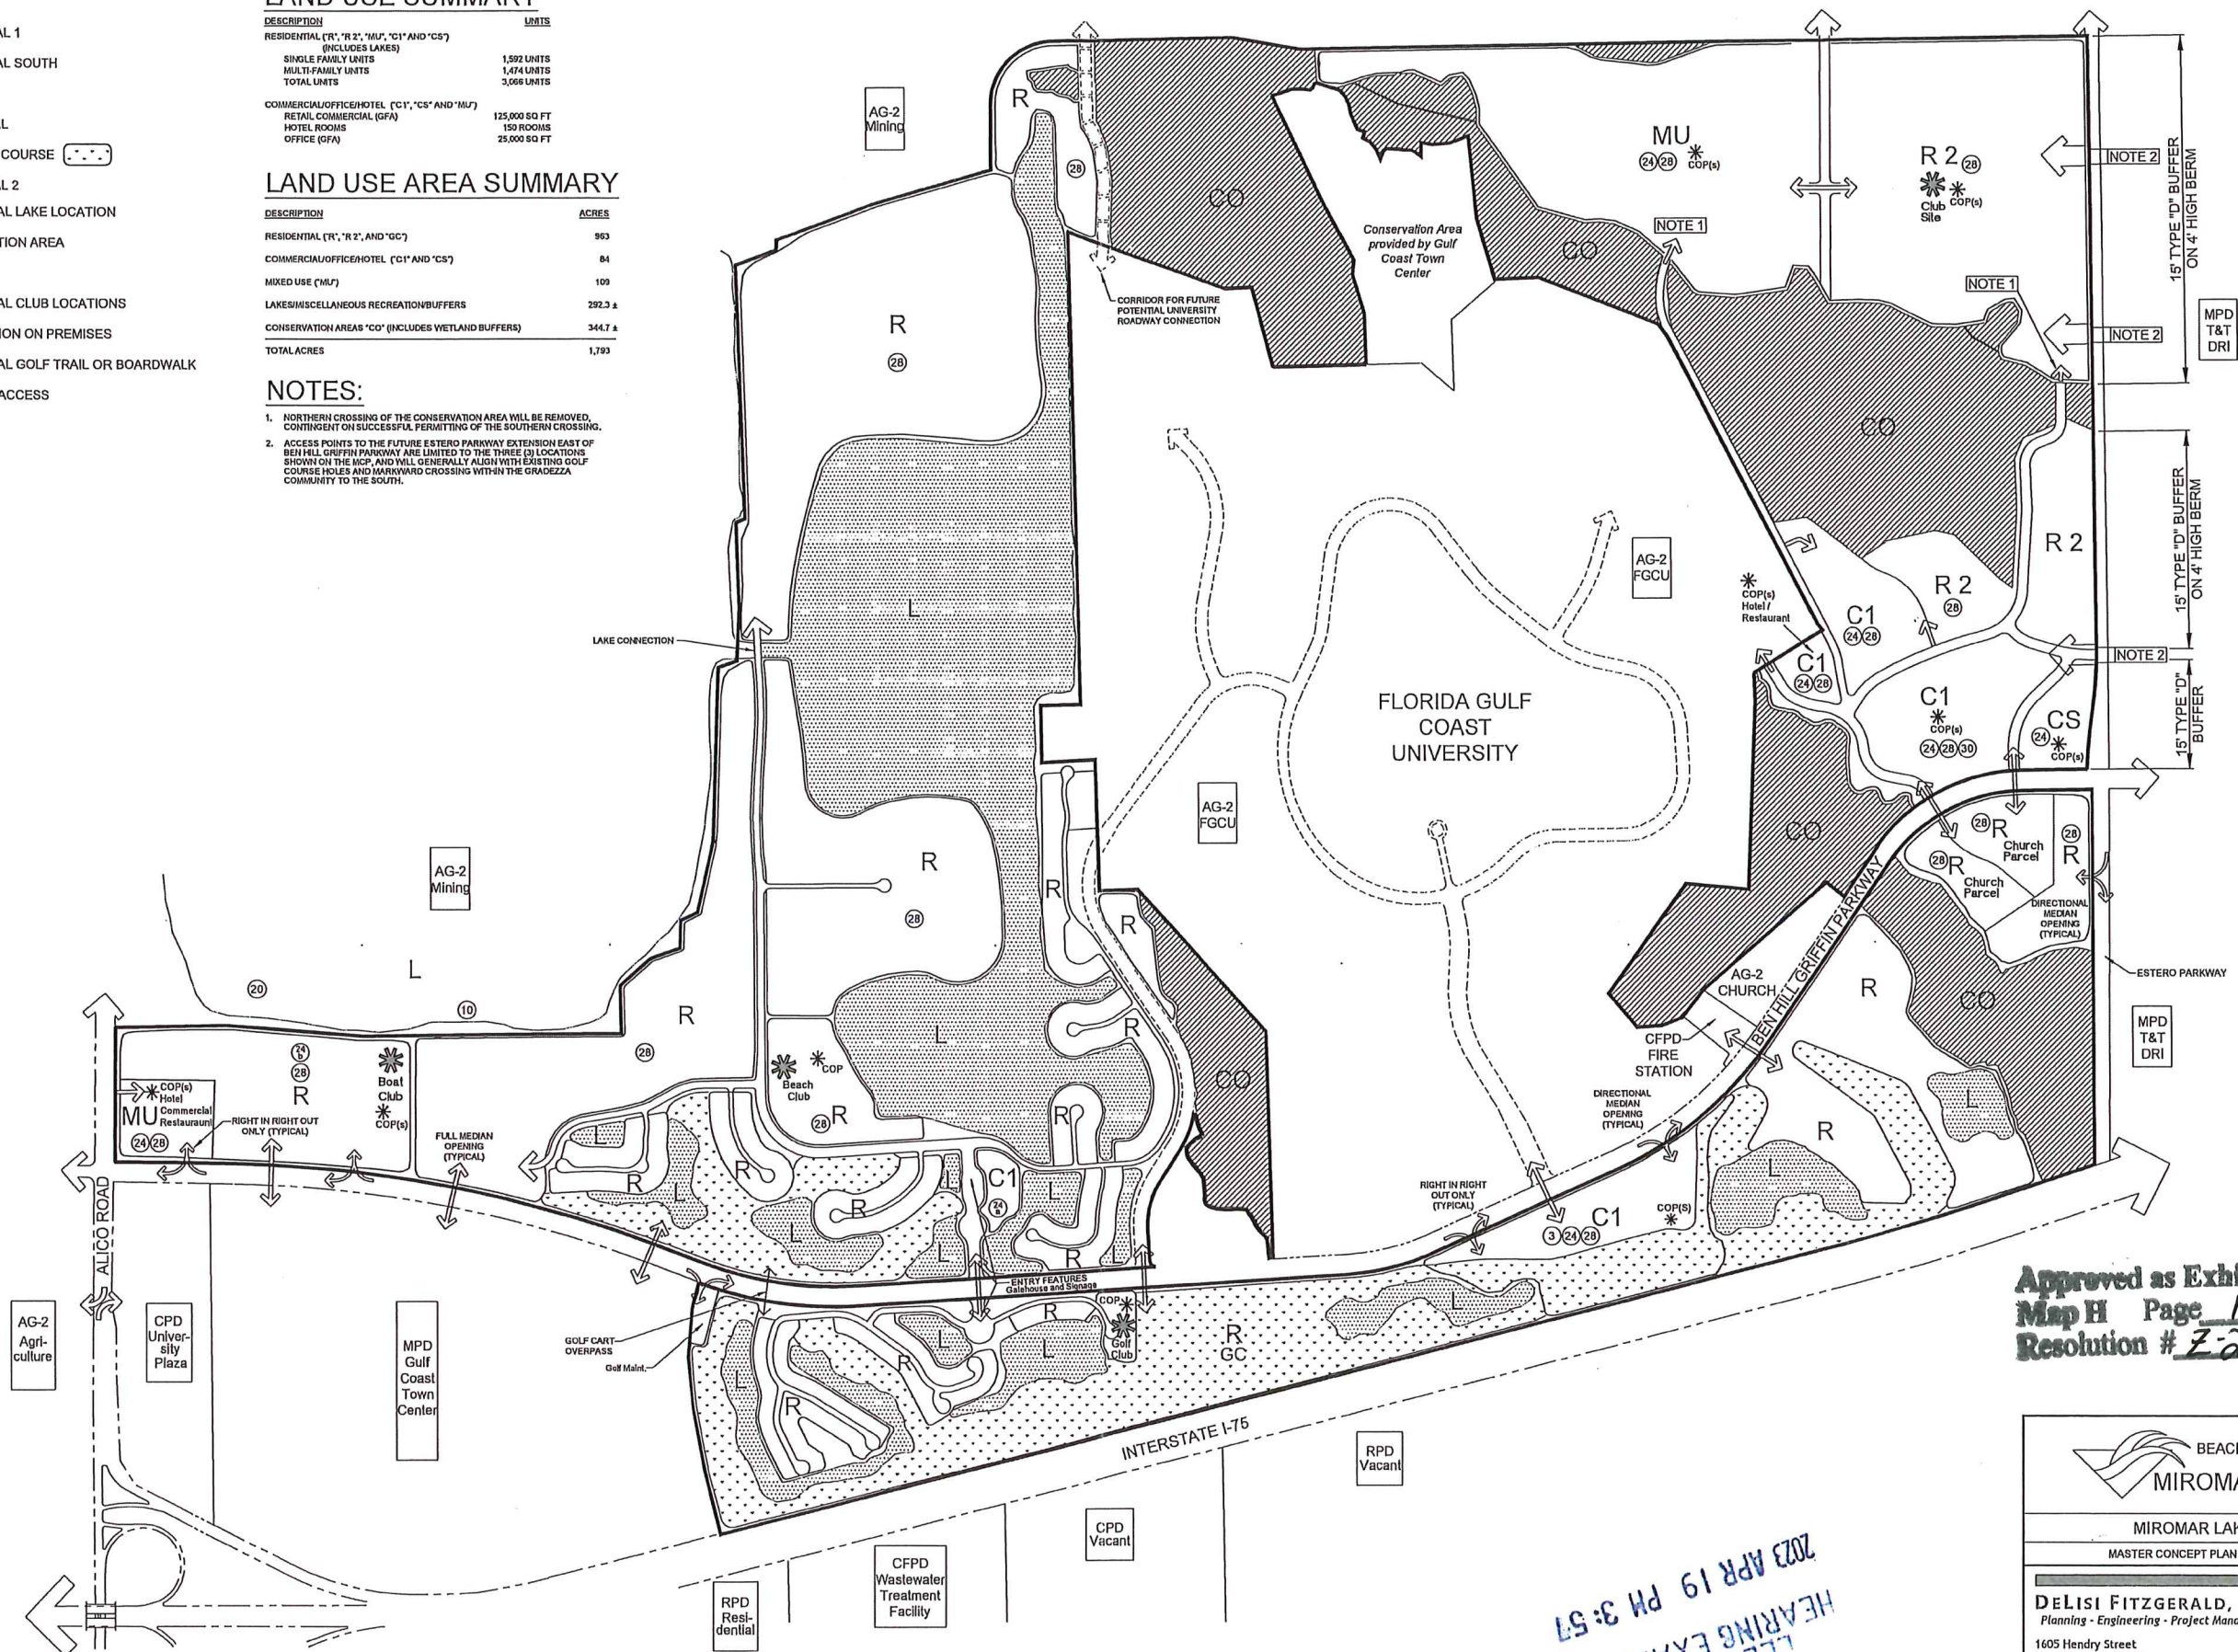

Approved as Exhibit C
Map H Page 1 of 1
Resolution # Z-23-018


BEACH & GOLF CLUB
MIROMAR LAKES

MIROMAR LAKES DRI

MASTER CONCEPT PLAN - APRIL 14, 2023

DELISI FITZGERALD, INC.
Planning - Engineering - Project Management

1605 Hendry Street
Fort Myers, FL 33901
239-418-0691 • 239-418-0692 fax



2023 APR 19 PM 3:57
LEE COUNTY
HEARING EXAMINER

NINTH DEVELOPMENT ORDER¹
AMENDMENT FOR MIROMAR LAKES
(CODIFIED)
A DEVELOPMENT OF REGIONAL IMPACT
STATE DRI #11-9798-142

LET IT BE KNOWN THAT, PURSUANT TO SECTION 380.06 OF THE FLORIDA STATUTES, THE BOARD OF COUNTY COMMISSIONERS OF LEE COUNTY, FLORIDA ADOPTED THE APPLICATION FOR DEVELOPMENT APPROVAL ORIGINALLY SUBMITTED AS THE ALICO AMDA, BUT THEREAFTER REDUCED TO AN ADA AND RENAMED AS THE MIROMAR LAKES DRI (HEREINAFTER REFERRED TO AS MIROMAR LAKES) BY ALICO, INC., AS THE OWNER/APPLICANT, FOR MIROMAR LAKES, L.L.C., AS THE DEVELOPER.

WHEREAS, on November 29, 1999 the Lee County Board of County Commissioners (Board), adopted the Development of Regional Impact (DRI) Application for Development Approval for the project known as Miromar Lakes, subject to conditions, restrictions and limitations; and

WHEREAS, the Miromar Lakes DRI Development Order was subsequently amended on December 10, 2002 to revise the adjustment rate applicable to the unpaid balance of the proportionate share assessment; and

WHEREAS, the Miromar Lakes DRI Development Order was amended a second time on December 15, 2003, to add approximately 534 +/- acres of property to the project (total project to be 1805 +/- acres). This change included a proposal to increase the number of golf holes by 18, add a clubhouse, and golf maintenance facility on the property; and

WHEREAS, in 2001, the Board approved a request to amend the Lee Plan to change the future land use designation of 19.85 +/- acres from "Density Reduction Groundwater Resource" to "University Community" and also to re-designate 170.92± acres from "University Community and Wetlands" to "Conservation Lands-Uplands" and "Conservation Lands – Wetlands"; and

WHEREAS, the project build out date was extended pursuant to HB7203 to December 31, 2011 by the third amendment of the Miromar Lakes DRI Development Order (Resolution 07-09-18), adopted August 21, 2007; and

¹ This is a codification and a restatement of all DRI Development Orders rendered with respect to Miromar Lakes within Lee County, including actions taken on November 29, 1999, December 10, 2002, December 15, 2003, August 21, 2007, January 26, 2010, and September 20, 2010, April 16, 2012, ~~and~~ June 18, 2014, and June 7, 2023.

WHEREAS, on January 26, 2010, the DRI Development Order was amended a fourth time to extend the build out date from December 31, 2011 to December 31, 2013, pursuant to SB360; and

WHEREAS, on September 20, 2010, the DRI Development Order was amended a fifth time to change the buildout from December 31, 2013 to December 31, 2020, the termination date from December 31, 2018 to December 31, 2026, change from annual to biennial reporting for transportation monitoring reports, and to eliminate Conditions II.A.2. and 3. relating to the re-analysis of affordable housing needs; and

WHEREAS, the DRI Development Order was amended a sixth time on October 11, 2011 to amend the compliance dates as follows: Buildout from December 31, 2020 to December 31, 2024 and the termination date from December 31, 2026 to December 31, 2030; and

WHEREAS, the DRI DO was amended a seventh time on April 16, 2012 to remove 12± acres from the project pursuant to a transfer of property to the Florida Gulf Coast University; and

WHEREAS, the DRI DO was amended an eighth time on June 18, 2014 to reflect the effect of SB 2156 and several Emergency Orders on the compliance dates and concurrency status.

WHEREAS, Miromar Lakes LLC filed the current application to amend the zoning and DRI development order approvals to convert a portion of commercial intensity to residential density. The amendment calls for reducing approved floor area of retail uses by 125,000 square feet, office uses by 315,000 square feet, research and development uses by 40,000 square feet and hotel by 300 rooms. The request increases residential land uses by 466 single family units.

NOW, THEREFORE, be it resolved by the Board of County Commissioners of Lee County, Florida, that the Development Order for Miromar Lakes DRI is hereby further amended as follows:

I. FINDINGS OF FACT AND CONCLUSIONS OF LAW.

- A. Miromar Lakes is a master planned community located in unincorporated south Lee County, east of I-75, north of Corkscrew Road, south of Alico Road, on either side of Ben Hill Griffin Parkway. The site is 1,793.646 +/- acres. Miromar is a mixed use development that will consist of: ~~2,600~~3,066 residential units, ~~250,000~~125,000 square feet of retail, ~~450~~150 hotel rooms, ~~340,000~~25,000 square feet of office, 250 wet slips, 400 dry slips, ~~40,000 square feet of research and development~~, and all accessory uses to these uses. In addition, there will be 312 acres of lakes/buffers and recreation, and a minimum of 338 of conservation lands. The recreational uses will include golf, tennis, clubhouses, and active and passive recreation. The legal description of the project is set forth in Exhibit A.

The assessment was based on a phasing schedule that includes two five-year phases described in Exhibit B. Site preparation commenced upon completion of all necessary permitting. The project buildout date is ~~April 3, 2028~~September 4, 2050. The termination date is ~~April 3, 2033~~September 2, 2055.

Water supply and wastewater treatment will be provided by Lee County Utilities.

- B. The factual findings, conclusions of law, conditions and other terms of this Development Order apply to the property legally described in Exhibit A and known as the Miromar Lakes DRI.
- C. The original 1,271.12± acres was zoned AG-2, and coincident with the 1999 approval of the Development Order the property was rezoned to a Mixed Use Planned Development (MPD). In the recent past, portions of the property have been utilized for mining and related activity. The mining, and related activity, will cease on any portion of the property under active development. The 534 +/- acre addition was initially zoned AG-2, but was rezoned to MPD coincident with the Second DRI Development Order Amendment. The 12+/- acres were located in the original 1,271.12+/- acres. With the sale of the 12+/- acres the original parcel will total 1,259.12+/- acres.
- D. The AMDA went through sufficiency and a report and recommendation were issued. The application was put on hold, then reduced to an Application for Development Approval (ADA). The ADA for Miromar Lakes is consistent with the requirements of Section 380.06, Florida Statutes. The project went through two sufficiency rounds and the Developer exercised its right to refuse participation in further rounds.
- E. The development is not located in an area designated as an Area of Critical State Concern under the provision of Section 380.05, Florida Statutes.
- F. The development does not unreasonably interfere with the achievement of the objectives of the adopted State Land Development Plan. The development is consistent with the State Comprehensive Plan if it is developed in accordance with the development parameters and conditions of approval set forth in this development order.
- G. The development has been reviewed by the Southwest Florida Regional Planning Council (SWFRPC) and is the subject of reports and recommendations adopted by that body on December 17, 1998 and June 21, 2001. The SWFRPC report and recommendations were subsequently forwarded to Lee County pursuant to Section 380.06, Florida Statutes. The development, as proposed in the ADA and modified by this Development Order, is consistent with the reports and recommendations of the SWFRPC pursuant to Section 380.06(11), Florida Statutes.

- H. The development, as conditioned, is located in, and is consistent with, the University Community, "Conservation Lands - Uplands", and "Conservation Lands- Wetlands" future land use categories.
- I. The conditions set forth below meet the criteria found in Section 380.06(15)(d), Florida Statutes.
- J. The Phase II and build out dates were extended by three years to 2012 and 2017 respectively pursuant to House Bill 7203, which amended Florida Statutes, Section 380.06(19)(c).
- K. Senate Bill 360 (SB360), as signed into law by the Governor of the State of Florida on June 1, 2009 (codified as a note to F.S. §§373.414 and 380.06) provided a statutory two-year extension to build out dates expiring between September 1, 2008 through January 1, 2012. The Board of County Commissioners recognized the statutory extension in Lee County Resolution 09-06-22, adopted on June 23, 2009,

In accord with SB 360, Miromar Lakes DRI qualified for a two-year extension of its build out date from December 31, 2011 to December 31, 2013. Under Lee County Resolution 09-06-22, concurrency is also extended to December 31, 2013, consistent with the build out extension. Under SB 360, the two-year extension does not constitute a substantial deviation of the original development order approvals warranting further DRI review.

- L. House Bill 7207 (HB7207), as signed into law by the Governor of the State of Florida on June 2, 2011 (as codified in Chapter 2011-139, Laws of Florida) authorized a four year extension for all valid DRI Development Orders. At the option of the developer, all commencement, phase, buildout and expiration dates for valid Developments of Regional Impacts may be extended by four years regardless of previous extensions issued in the past.

In accord with HB 7207, Miromar Lakes DRI qualified for the four-year extension of its build out date from December 31, 2020 to December 31, 2024. Under Lee County Resolution concurrency is also extended to December 31, 2024, consistent with the build out extension. Under HB 7207, the extension of the DRI's compliance dates does not constitute a substantial deviation and cannot be considered in the future in determining whether there has been a substantial deviation of the original development order approvals warranting further DRI review.

In accordance with SB2156, and Emergency Orders 12-140, 120192, 120217, 120199, Miromar Lakes DRI qualified for the extension of its build out date from December 31, 2024 to April 3, 2028. Under Lee County Resolution concurrency is also extended to April 3, 2028, consistent with the build out extension. The extension of the DRI's compliance date does not constitute a substantial deviation

and cannot be considered in the future in determining whether there has been a substantial deviation of the original development order approvals warranting further DRI review. [Miromar Lakes DRI qualified for additional extensions placing the buildout date and Termination Dates as September 4, 2050 and September 2, 20255 respectively.](#)

II. ACTION ON THE REQUEST AND CONDITIONS OF APPROVAL.

NOW THEREFORE, be it resolved by the Board of County Commissioners of Lee County, Florida, in a public meeting duly advertised, constituted and assembled ~~June 18, 2014~~[June 7, 2023](#), the ~~Eighth~~[Ninth](#) Amendment to the Miromar Lakes Development of Regional Impact is hereby approved subject to the conditions, restrictions and limitations that follow. For the purpose of this Development Order, the term "Developer" refers to Miromar Lakes, L.L.C., and includes all of its successors or assigns, and all references to County Ordinances or other regulations including future amendments.

A. AFFORDABLE HOUSING.

The Applicant conducted a survey in accordance with an approved methodology to determine whether a sufficient number of affordable housing units are available to meet the demands of the projected, non-construction, permanent employees of Phase I of the Project. The survey results demonstrated there was no unmet demand through build out of Phase I.

B. ENERGY.

The Developer will utilize the energy conservation measures outlined in the ADA.

C. STORM WATER MANAGEMENT.

1. The Developer has obtained an Environmental Resource Permit (ERP) from South Florida Water Management District (SFWMD) - Permit No. 951122-7 Miromar Lakes. Prior to construction, the Developer must provide Lee County Development Services with a copy of the ERP, and any early work permit. The Developer must provide Lee County Development Services Division with a copy of all amendments to the ERP that include property that was not a part of the original application.

2. The Developer, Property Owner's Association, Uniform Community Development District (UCDD), or other entity with operational responsibility for the surface water management system must comply with Class III water quality standards for all water discharged into the lakes generally referred to as the north and south mining lakes.

3. The Developer must incorporate best management practices (BMPs) into the surface water management plans submitted to SFWMD. The Developer must also

utilize BMPs during construction for control of erosion and sediment. These practices will be identified on the aforementioned plans submitted to SFWMD, and other agencies with jurisdiction.

4. The first habitable floor of all structures must be at or above the 100-year flood elevations. The 25-year/three-day storm event must be used in computing off-site discharge rates, taking into account the backwater elevations along on-site flowways.

5. The Developer must obtain a SFWMD permit for dewatering activities as required by Sections 2.5 and 5.2.2 Dewatering, Basis of Review (water use).

6. Upon completion of construction and stabilization of side slopes, the Developer must remove all silt barriers, hay bales, anchor soil, and accumulated silt.

7. The Developer must establish a legal operating entity in accordance with the SFWMD Basis of Review and Lee County Land Development Code (LDC), to maintain all internal storm water management lakes, ditches, and wetlands. The same condition applies to that portion of the north and south mining lakes under the ownership and control of the Developer. Easements, common areas or other legal mechanisms may be utilized to ensure sufficient access to the storm water management areas.

8. Where applicable, the storm water management plan submitted to SFWMD must consider measures to reduce runoff rates and volumes, including, but not limited to, fixed control structures, perforated pipes, and grass swale conveyances. The Developer must use swales rather than closed systems whenever practical.

9. The Developer must create littoral zones along the shoreline banks of the storm water management system consistent with the requirements of SFWMD and Lee County. The littoral zones must consist of native emergent or submergent aquatic vegetation. The Developer must ensure, by supplemental replanting if necessary, at least 80 percent cover by native aquatic vegetation within the required littoral zones.

10. The surface water management system design must incorporate natural flowway corridors and restore impacted natural flow way corridors.

(a) Storm water run-off must be pre-treated consistent with the South Florida Water Management District permit prior to discharging the run-off into existing lake or wetland (any aquatic) systems.

(b) The development must maintain the function and integrity of the Stewart Slough, the natural flowway being restored through the South Florida Water Management District's ERP, contained within the boundaries of this DRI.

Flowways are precluded from being primary surface water treatment areas.

11. The Developer, or the legal operating entity, must perform annual inspections of the project's on-site storm water management system to ensure that the system is maintained in accordance with the final approved design.
12. The Developer must meet all Army Corps. of Engineers, Department of Environmental Protection, South Florida Water Management District, and Lee County requirements regarding the impact of the proposed storm water management system on state or federally listed plants or animal species occurring on-site. When required by federal, state, or local permits, the Developer will provide mitigation for those impacts.
13. The Developer must vacuum sweep all commercial streets and parking areas within the development on a regularly scheduled basis.
14. When required by SFWMD in accordance with Section 5.2.2, Basis of Review (E.R.P.), the Developer must provide at least one-half inch of dry pre-treatment (retention or detention), or an equivalent alternative, for commercial and industrial uses.
15. The Developer must participate in any Countywide storm water management system adopted by Lee County that directly benefits the development, under the same fiscal terms and conditions applicable to other benefitted properties.
16. As part of the routine maintenance of the project, the Developer must:
 - (a) mow grassed storm water management areas;
 - (b) remove accumulated debris within treatment areas;
 - (c) replace all identifiable erosion to banks; and
 - (d) remove noxious exotic vegetation that may potentially interfere with the proper function of the treatment areas.
17. The Developer must inspect, clean and repair all under-drain systems and grease baffles on a regular basis. The period between inspections may not exceed eighteen months.
18. The storm water management system must be designed to ensure that the quality and quantity of the water entering the wetlands is adequate to ensure the wetland survivability. The impact of the storm water management system on the wetland mitigation areas will be evaluated by the SFWMD during the ERP process.

19. All individual tenants or residents must comply with applicable laws and regulations regarding the management and use of hazardous materials.
20. Golf Course:
 - (a) Prior to development order approval for the first 18-hole golf course, the developer must conduct a pre-development groundwater and surface water analysis and submit the analysis to the County. This analysis is intended to establish baseline data for groundwater and surface water monitoring for the project area. The analysis must be designed to identify those nutrients and chemicals that are anticipated to be associated with the project. Prior to commencing this baseline study, the developer must submit the methodology for review, comment, and approval by the County.
 - (b) The developer must submit an annual monitoring report of surface water quality on the first 18-hole golf course for a period of five years from the issuance of the certificate of completion for the golf course, or the last violation, if any, of Chapter 62-302, F.A.C. water quality standards. The monitoring program will include: testing to assess whether there are any herbicide, pesticide or fertilizer pollution of the water at the project's outfall locations, which are the south mining lake, the Stewart Cypress Slough, and the north headwaters of Estero River. The developer will submit the test results with the monitoring report. The monitoring program will be established and operated at the expense of the developer, or other comparable legal entity charged with the legal responsibility of managing the golf course. This plan will be evaluated in accordance with the directives of Chapter 62-302, F.A.C., water quality standards.
21. If groundwater or surface water pollution occurs, as that term is defined by the rules or regulations in effect at the time, and if the pollution is caused by the application of fertilizers, herbicides or pesticides to the golf course, the application of the pollutant must cease until there is a revised management plan for the application of the pollutant. A determination that the application of fertilizers, herbicides or pesticides to the golf course are the cause and source of the pollution must be based on competent and substantial evidence. If mitigation is necessary to address the pollution, a mitigation plan approved by Lee County and other appropriate agencies will be implemented by the developer.

D. TRANSPORTATION

1. Significant Impacts

(a) Assessment Parameters

The traffic impact assessment for the project assumes the following development parameters:

	Phase I (2004)	Buildout (2028)
Residential		
Single Family (ITE LUC 210)	314 D.U.	700 1,592 D.U.
Multi-Family	1,100 D.U. Total	1,900 1,474 D.U.
Total Apartments (LUC 220)	200 D.U.	200 D.U.
Residential Condominiums (LUC 230)	900 D.U.	1,700 1,274 D.U.
Non-Residential		
--Service/Office (LUC 710)	400 25,000 sq. ft.	340 25,000 sq. ft.
--General Retail (LUC 820)	160,000 sq. ft.	250 125,000 sq. ft.
--Hotel (LUC 310)	350 rooms	450 150 rooms
--Industrial/R & D (LUC 760)	-0 sq. ft.	40,000 sq. ft.
--Golf Course (LUC 430)	36 18 holes	36 18 holes
 --Community Use (LUC 495) (Golf Clubhouse)	 20,000 sq. ft.	 20,000 sq. ft.
--Beach Park (LUC 415) (Including a Beach Clubhouse for use of residents and their guests.)	 10 acres	 10 acres

The above parameters form the basis for the project impacts and mitigation requirements contained herein. The assumed land uses associated with the general parameters are identified by the Land Use Code (LUC) from the Institute of Transportation Engineers (ITE) Trip Generation Manual, 6th Edition. While approved zoning categories may allow a wider range of uses, from a DRI standpoint, the project impacts are based on the above parameters and assumed uses. Any significant change in the assumed uses or mix of uses will require a re-evaluation of the DRI transportation impacts. A significant change is one that would increase the external project traffic by five (5) percent or more **or** that would significantly change the projected distribution and assignment of project traffic, so as to result in additional significantly and adversely impacted roadway links. The overall traffic at the project entrances based on the above parameters is estimated to be 3,931 p.m. peak hour trips.

(b) Phase I Impacts

The assessment indicates that the significantly impacted roadways and intersections described below were anticipated to be operating below acceptable levels of service at the end of Phase I (2004):

<u>Roadways</u>	<u>Needed Improvement</u>
Alico Road	
--U.S. 41 to Seminole Gulf Railway	Widen to six (6) lanes*
--I-75 to Ben Hill Griffin Parkway	Widen to six (6) lanes
<i>* or realignment/interchange as part of Metro Parkway extension (6 lanes), US 41 to Six Mile Parkway</i>	
<u>Intersections</u>	
Alico Road/Three Oaks Parkway	Add 2 nd NB left, 2 nd WB left, 2 nd SB left
Alico Road/Project Entrance	Intersection Improvements
Ben Hill Griffin Parkway/Alico Road	Add 2 nd NB left
Ben Hill Griffin Parkway/Project Entrances	Intersection Improvements
Ben Hill Griffin Parkway/Corkscrew Road	Signalization, add 2 nd EB left, 2 nd SB left
US 41/Alico Road	Add 2 nd WB right, 3 rd SB left

The intersection improvements include geometric improvements, such as turn lanes and signalization when warranted. The Developer will be fully responsible for improvements needed at the project entrances that are deemed site-related (See Paragraph D.4). The intersections are addressed in the overall proportionate share calculation. As noted above, however, site-related needs at the project entrances are not addressed in the proportionate share calculation.

(c) Buildout Impacts

The assessment indicated that the significantly impacted roadways and intersections described below were anticipated to be operating below acceptable levels of service at the end of buildout (2009²):

<u>Roadways</u>	<u>Needed Improvement</u>
Alico Road	
--U.S. 41 to Seminole Gulf Railway	Widen to six (6) lanes
--Lee Road to I-75	Widen to eight (8) lanes
--I-75 to Ben Hill Griffin Parkway	Widen to six (6) lanes

² The build out date of the Miromar DRI was extended to 2020. However, the transportation analysis was conducted assuming a build out date of December 31, 2009. For this reason, the reference to 2009 was not amended in this paragraph.

Ben Hill Griffin Parkway --T&T Entrance to Alico Road	Widen to six (6) lanes
Corkscrew Road --Three Oaks Parkway to Ben Hill Griffin Parkway	Widen to six (6) lanes
Daniels Parkway -- Metro Parkway to Six Mile Cypress Parkway	Widen to eight (8) lanes
--Six Mile Cypress Parkway to Fiddlesticks Boulevard	Widen to ten (10) lanes
--Fiddlesticks Boulevard to I-75	Widen to eight (8) lanes
U.S. 41 -- Coconut Road to Williams Road	Widen to six (6) lanes
--Alico Road to Six Mile Cypress Parkway	Alternate facility needed*

**Metro Parkway extension (six (6) lanes), US 41 to Six Mile Parkway*

Intersections

Alico Road/Oriole Road	Add 2 nd WB left, signalization
Alico Road/Three Oaks Parkway	Add 3 rd EB left, 3 rd NB through 3 rd SB through
Alico Road/I-75 East Ramp	Add 2 nd WB left, 2 nd NB left
Alico Road/Project Entrance	Intersection Improvements
Ben Hill Griffin Parkway/Alico Road	Add 3 rd NB left, 3 rd SB through, 3 rd WB through, 2 nd EB left
Ben Hill Griffin Parkway/Project Entrances	Intersection Improvements
Ben Hill Griffin Parkway/Corkscrew Road	Add 2 nd EB left, 2 nd NB left, 2 nd SB left
Corkscrew Road/Three Oaks Parkway	Add 2 nd EB left
US 41/Alico Road	Add 3 rd SB left

The intersection improvements include geometric improvements, such as turn lanes and signalization when warranted. The Developer will be fully responsible for improvements needed at the project entrances that are deemed site-related (see Paragraph D.4). The intersections are addressed in the overall proportionate share calculation. As noted above, however, site-related needs at the project entrances are not addressed in the proportionate share calculation.

The amended traffic assessment conducted for the Fifth Amendment to the development order indicated that the significantly impacted roadways described below will be operating below acceptable levels of service at the end of buildout in 2028.

<u>Roadways</u>	<u>Needed Improvement</u>
Ben Hill Griffin Parkway -- Miromar Lakes Entrance to College Club Drive	Widen to six (6) lanes

2. Mitigation

(a) Phase I Proportionate Share

The total proportionate share obligation to mitigate the Phase I transportation impacts on the non site-related roads and intersections set forth in Paragraph D.1.b. above is estimated to be \$1,270,796 in 1999 dollars. The Phase I road impact fees anticipated to be generated by the project based on the development parameters set forth in Paragraph D.1.a and under the current County road impact fee schedules are \$3,171,928, or \$1,901,132 more than the Phase I proportionate share obligation.

(b) Buildout Proportionate Share

The total proportionate share obligation to mitigate the build out transportation impacts on the non-site related roads and intersections set forth in Paragraph D.1.c. above is estimated to be \$10,914,866 in 1999 dollars. The total road impact fees anticipated to be generated by the project through buildout based on the development parameters set forth in Paragraph D.1.a. and under the current County road impact fee schedules are \$5,686,010. The proportionate share obligation is approximately \$5,228,856 more than impact fees in 1999 dollars.

(c) Traffic Mitigation

The Developer must mitigate its overall project traffic impacts through the payment of the entire project proportionate share obligation of \$10,914,866 for project buildout. The details of this payment must be established in a Local Government Development Agreement executed pursuant to Section 163.3220, Florida Statutes, and Chapter 2, Article III of the Lee County Land Development Code. The Developer must submit to Lee County a Development Agreement within 90 days of the effective date of this DRI Development Order.

Generally, the payment is to be accomplished in the following manner:

Within 120 days of the effective date of this DRI Development Order, the Developer must deliver as Maker a promissory note, payable to Lee County, in the original principal amount of \$10,914,866.00, representing the entire proportionate share obligation. The note will provide for payment of the

entire amount to be paid the County before December 30, 2005. Additionally, the note must provide for interest to be paid at a rate of 7.4 percent on the unpaid balance of the proportionate share assessment.

The promissory note will provide for payments of principal as follows:

The first principal installment will be in the amount of the Phase I impact fee obligation, \$3,171,928.00, and will be due and payable on or before the earlier of one year from the date of final DRI Development Order approval or the date of the issuance of the first building permit for vertical construction. However, some development such as the golf course, golf clubhouse, information/sales center/model center, and beach club may proceed prior to the first payment. That development will be required to pay road impact fees at the time permits are received. Impact fee payments will be deducted from the first principal payment;

The second principal installment in the amount of \$6,000,000.00, will be due and payable on December 30, 2002;

The final payment of principal in the amount of \$1,742,938.00, will be due and payable December 30, 2005.

Interest will be payable on December 30th of each year beginning December 30, 2000 and continuing until the promissory note is paid in full. Upon payment of the six million dollar principal payment prior to December 30, 2002, the 2002 interest payment will be based on the remaining principal balance of \$1,742,938.00. Each payment will be in the amount of all accrued and unpaid interest to the date thereof. Except for the year 2002, the amount of interest accrued will be based on the daily principal balance outstanding during the preceding year. The applicable interest rate will be equal to 7.4 percent. Interest payments are due and owing on December 30th of each calendar year. All prepayments of principal shall be credited to the next installment(s) due. All interest payments will be deposited in the District 3 impact fee account.

The Developer may choose to provide certain improvements such as the right-of-way for Koreshan Boulevard Extension along the south property line for Miromar Lakes or the six-laning of Ben Hill Griffin Parkway in exchange for credits against the overall payment obligation. These improvements are subject to concurrence by Lee County DOT on their scope and timing, and the contributions will be treated as prepayments of principal. Dedication of the Koreshan Boulevard Extension right-of-way will be valued consistent with the provisions of the Lee County Land Development Code, based on the date prior to DRI Development Order approval.

The portion of the payment in lieu of impact fees, estimated at \$5,686,010.00, will be treated as impact fees as outlined in the Lee County Land Development Code and deposited in the District 3 impact fee account. Cash payments above and beyond those in lieu of impact fees will be applied by Lee County toward the following improvements and in the following priority:

The list of significantly and adversely impacted roads and intersections from Paragraphs D.1.b and D.1.c.

Other non-site related roadway improvements benefitting Miromar Lakes.

(d) Concurrency

1. If the development agreement and promissory note specified in Paragraph D.2.c. above are provided as described and in the time frames noted, the Miromar Lakes DRI will be granted a concurrency certificate for buildout of the project, that is, the certificate will be valid until the project completes the buildout development parameters specified in Paragraph D.1.a. or December 31, 2028, whichever is sooner. Thereafter, further development of the project will be subject to the Concurrency Management System, unless the concurrency certificate is extended as provided in Condition D.2.d.2 below. Under the payment schedules identified above, the Developer will not be required to pay road impact fees at the building permit stage, except as previously noted for that limited development that may occur prior to the first payment. If the payments are not made as described, then no further building permits will be issued until the Developer makes the payment. Concurrency vesting is contingent on the payment schedule and amounts set forth in Paragraph D.2.c. The proportionate share required herein was paid in full and the project will not lose its vested status and will not be subject to the County's Concurrency Management System for all future development as long as the development is constructed within the adopted development parameters. The Developer will have a 15 day grace period following the due date for each payment within which to make the required payment without affecting the concurrency vesting.
2. In 2010, the developer filed a Notice of Proposed Change that resulted in a fifth amendment to the DRI development, which permitted an extension of the project buildout to December 31, 2020, extended the concurrency certificate in Condition II.D.2.d.1. above to December 31, 2020, and provided a detailed traffic assessment to the Lee County Department of Transportation for review and approval.

If the developer files a Notice of Proposed Change that results in an extension of project build out beyond December 31, 2024 and the developer desires to extend the concurrency certificate in Condition D.2.d.1. above beyond 2024, the developer must provide a detailed traffic assessment to Lee County DOT for review and approval. The assessment must include, but not limited to, identifying the adjusted phasing, level of development anticipated for the revised phasing, estimated traffic impacts, needed improvements, and the project's proportionate share of those improvements.

The assessment will be a cumulative analysis of the project's traffic impacts. The County will provide credit against the recalculated proportionate share for all mitigation paid through the date of the new traffic assessment. The proportionate share payments previously made by the Developer will be adjusted to then current year dollars. This will be accomplished by increasing the principal amount paid by an amount equal to the increase as determined in the State Highway Bid Index for the State of Florida, published in the Engineering News Record. This increase will be expressed as a percentage and will be measured from the index published for the second quarter of 1999 to the index published in the then latest available edition. In no event may the adjustment result in a refund of money paid to the County. The assessment must identify mitigation for those roadway segments that are significantly and adversely impacted by cumulative project traffic at the extended build-out year in accordance with the Transportation Uniform Standard Rule in the Florida Administrative Code. Prior to conducting a reassessment analysis, the developer must attend a transportation methodology meeting with the County, and other review agencies as necessary, to establish the appropriate methodology.

The traffic assessment will be prepared by the developer following generally acceptable transportation planning procedures consistent with the standards in effect at the time. Additional mitigation, if any, resulting from the traffic assessment must be paid in a manner generally consistent with that of the original mitigation. For example, the development order and any corresponding development agreement must be amended to reflect the revised phasing and additional mitigation.

3. Amendments to Phasing Schedule

If the project phasing is expanded in the future, the phases must be limited to not more than five-year intervals and a new analysis will be required at the start of each phase.

4. Access and Site-Related Improvements

The Developer is fully responsible for its share of the following site-related roadway and intersection improvements: all intersection improvements, including signalization, turn lanes, deceleration lanes, and other improvements deemed necessary by the County Engineer and consistent with the Lee County Land Development Code for the project's access points onto Alico Road and Ben Hill Griffin Parkway. Site-related improvements are not eligible for credit against impact fees and are also ineligible for offset against the project's proportionate share obligation.

5. Biennial Transportation Monitoring Report

(a) Design of Monitoring Program

The transportation monitoring program will be designed in cooperation with the Lee County Department of Transportation, the Florida Department of Transportation (FDOT), the Southwest Florida Regional Planning Council (SWFRPC), and the Florida Department of Economic Opportunity (FDEO) prior to submittal of the first report. The methodology of the biennial transportation monitoring report may be revised if agreed upon by all parties.

(b) Submittal of Monitoring Report

The Developer must submit a biennial transportation monitoring report to the following entities for review and approval: Lee County Department of Transportation, FDOT, FDEO, and SWFRPC. Additionally, the Developer must provide a copy of the report to Florida Gulf Coast University (FGCU). The first monitoring report will be submitted one year after the effective date of the DRI Development Order. The Developer must provide written notice to the above review agencies if he concludes that a traffic monitoring report is not required because no traffic impacts have been created. Once an biennial transportation monitoring report has been submitted, a report must be submitted biennially thereafter until project buildout, whether actual or declared.

(c) Minimum Requirements for Report Contents

At a minimum, the monitoring report will measure the project's actual external roadway impacts and the level of service

conditions on the impacted roads and intersections, and determine the timing for needed improvements. The biennial traffic monitoring report must also contain the following information:

- 1) P.M. peak hour traffic counts with turning movements at the project's access points onto Alico Road and Ben Hill Griffin Parkway, and on the external road segments and intersections identified in Paragraph D.1.c.
- 2) A comparison of field measured project traffic volumes to the project trip generation assumed in the DRI analysis. The Developer will need to specify in the methodology how the internal interaction will be measured.
- 3) Estimated existing levels of service and needed improvements for the roads and intersections specified in Paragraph D.1.c. above.
- 4) Estimated future levels of service and needed improvements for the roads and intersections specified in Paragraph D.1.c. above, based on a one-year projection of future volumes.
- 5) A summary of the status of road improvements assumed to be committed by Lee County and FDOT as set forth below:

<u>Roadways</u>	<u>Improvement</u>	<u>Construction Schedule</u>
Alico Road		
--US 41 to Seminole Gulf Railway	four (4) lanes	FY 98/99
--Seminole Gulf Railway to I-75 West Ramps	six (6) lanes	FY 98/99
Corkscrew Road		
--Sandy Lane to I-75	four (4) lanes	FY 98/99
Three Oaks Parkway		
--Alico Road to Daniels Parkway	four (4) lanes	FY 00/01
Treeline Avenue		
--Alico Road to Daniels Parkway	four (4) lanes	FY 01/02

US 41		
--Alico Road to Daniels Parkway	four (4) lanes	FY 98/99
<u>Intersections</u>	<u>Improvement</u>	<u>Construction Schedule</u>
I-75 Ramps/Alico Road	Signalization	FY 98/99

(d) Implications

- 1) If the biennial transportation monitoring report reveals that the project trip generation exceeds the thresholds identified in 380.06(19)(b)15, Florida Statutes, then the statutory provisions regarding substantial deviations will govern. If the project is deemed to be a substantial deviation, the Developer must then undergo additional DRI review. This review must reanalyze the project impacts on the County road network in general, and specifically evaluate the potential project impacts on the roadway segments identified in Paragraph D.3 above.
- 2) Changes to development parameters or phasing may trigger the need to rebut the statutory presumption of substantial deviation. In some instances, the evidence necessary to rebut the presumption may involve the need for a comparison of project trip distribution and assignment.

6. Other

(a) Access to FGCU

The Developer has accommodated a second access to FGCU that connects to Ben Hill Griffin Parkway at STA 916+43.75, as contemplated in the FGCU Master Plan.

In addition, the Developer has accommodated two additional accesses to the FGCU campus from: 1) the southern project entrance off Ben Hill Griffin Parkway; and 2) the east boundary of the project as reflected on the DRI Master Plan (Map H) dated 02-14-2014.

(b) Access Locations and Movements

The transportation assessment was based on the access locations and movements identified in the DRI Master Plan (Map H) dated 12/23/09, printed by Miromar Development Corporation. Additional accesses may require further analysis by the Lee County Department of Transportation for the DRI.

(c) Pedestrian/Bicycle and Transit Facilities

The Developer will provide for pedestrian and bicycle facilities and bus stop locations in accordance with the attached Exhibit D.

(d) Access to Future 951

Future access to County Road 951 will be subject to the recommendations set forth in the PD&E for the roadway.

7. Land Use Conversion

The approved parameters, as specified in this Development Order, may be modified by the Developer without further amendment to this Development Order, subject to the conditions of Paragraph D.1.a. and as set forth below.

- (a) Single Family units can be converted to multi-family units, and multi-family units can be converted to single-family units and any type of multi-family unit and other unit types permitted under the zoning can be constructed as long as the conversion of residential unit types does not result in a significant change as that term is defined in paragraph D.1.a. The current ITE manual will be used to determine whether or not there is 5% or less increase in net new external p.m. trips. This conversion may occur without further DRI or substantial deviation review.
- (b) Office use may be converted to Research and Development (R&D) at a ratio of 1,000 square feet of Office to 1,100 square feet of Research and Development, unless the current ITE manual would require an adjustment to the conversion rate set forth herein. There is no limitation on the conversion of Office use to Research and Development (R&D) at the above ratio.
- (c) The amount of conversion must be reported as part of the subsequent biennial monitoring reports to the Southwest Florida Regional Planning Council, and the Department of Economic Opportunity.
- (d) [Any other conversion must occur through the DRI amendment process.](#)

8. Golf Cart Crossing

- (a) Any golf cart crossing of Ben Hill Griffin Parkway by the Miromar Lakes DRI must be grade-separated. At-grade golf cart crossings of Ben Hill Griffin Parkway are prohibited. The golf cart crossing must be elevated over Ben Hill Griffin Parkway.

- (b) The elevated golf cart crossing of Ben Hill Griffin Parkway was reviewed and approved by Lee County DOT. The review included issues such as structural requirements and adequate sight distances for Ben Hill Griffin Parkway. The Developer obtained a right-of-way permit from Lee County DOT and agreed to adequately maintain the structure within the right-of-way.

E. VEGETATION AND WILDLIFE/WETLANDS.

1. Where feasible and appropriate for bird usage, storm water management lakes must include draw-down pool features in littoral shelf slopes. These features will be reviewed as part of the ERP permit and will be considered because they favor use by wood storks and wading birds.
2. Identifiable impacts to the Florida panther habitat will be addressed through the Army Corps. of Engineers (ACOE) permitting process. The ACOE is consulting with U.S. Fish and Wildlife (USFWS) Service as part of the Section 7 consultation under the Endangered Species Act. The ACOE will evaluate, through the permitting process, the impacts to the Florida panther. The impact must be assessed in accordance with Section 404 Federal Register and Section 7 of the Endangered Species Act.

The panther mitigation for buildout of the development, as depicted on Map H, has been identified in the ACOE Permit #199507483 (IP-MN) and SAJ1995-07483 (IP-MN) Addition and South Florida Water Management District (SFWMD) Environmental Resource Permit (ERP) No. 36-03568-P, as modified. The 12.65 Panther Island Mitigation credits have been transferred and 548.0 acres (194.0 and 353.0 acre parcels) of off-site land for panther mitigation has been acquired by the applicant. The 353-acre parcel must be accepted by appropriate agencies and conservation easements as per ACOE and SFWMD permit condition requirements must be recorded over the 194.0 and 353.0 acre parcels.

3. The Big Cypress Fox Squirrel Management Plan, dated July 2, 1998, must be amended to:
 - (a) address the quantity and quality of the Big Cypress Fox Squirrel habitat to be protected, and
 - (b) to identify the entity that will be responsible for the perpetual maintenance of the habitat.

The afore-stated amendments to the Big Cypress Fox Squirrel Management Plan are subject to review and approval by Lee County, FDEO, and SWFRPC. Once approved, the management plan must be incorporated into this DRI Development Order. (9J-2.041 FAC)

4. The Developer must obtain an off-site relocation permit from the Florida Fish and Wildlife Conservation Commission (FWC) for gopher tortoises.
5. Where appropriate, the Developer must design internal roads that cross the Stewart Cypress and other strand areas to accommodate wildlife crossings of appropriate size for use by Florida panther and Florida black bear. Such size and design must correspond to the size and design set out in Condition 18 to the MPD.
6. Seventy-five (75) percent of the total number of required trees used in buffers and landscaping must be indigenous native varieties. Fifty percent (50%) of the total number of required shrubs used in buffers and landscaping must be indigenous native varieties. Where practicable, ecologically viable existing native vegetation should be incorporated into the landscape design. Xeriscaped landscape areas should not be irrigated after the initial start-up period, unless weather conditions and the survival of the areas require otherwise. Category 1 invasive exotic vegetation listed by the Florida Pest Plant Council may not be used for landscaping south of the main branch of the Stewart Cypress Slough (see Exhibit F attached hereto), except that *Ficus benjaminia* trees are permitted only along Ben Hill Griffin Parkway to screen the residential community and to carry forward the existing landscaping theme of the northern and western portions of the DRI.
7. The following management guidelines must be implemented to further reduce the potential for ground and surface water impacts from the golf course:
 - (a) The course must be planted with a turf grass cultivated variety having drought and pest resistant qualities and requiring relatively low fertilizer use;
 - (b) The irrigation system should operate on an "as needed" basis by the utilization of weather forecasting and ongoing assessment of the moisture content of the soil. It is not the intent of this provision to require the purchase or installation of high technology weather forecasting or rain monitoring equipment.
 - (c) Fertilizers with a low leaching potential (slow release) must be used whenever possible. Fertilizers may not be applied after active growth of the turf grass has ceased. Application rates must be kept to the lowest reasonable levels;
 - (d) To reduce sources of pollutants, especially nutrients and pesticides associated with the golf course, the golf course manager must implement a chemicals management plan which includes an integrated pest management (IPM) program and a nutrient

management program so that nutrients and pesticides are used only when absolutely necessary and only in the most conservative manner through minimal species-specific applications. The nutrient management program must include the use of soil tests to determine needed applications of nutrients. Only EPA-approved chemicals are permitted. Turf managed areas (including fairways, tees, and greens) are prohibited within 35 feet of the Conservation Areas (CO) shown on the Master Concept Plan for Miromar Lakes.

- (e) The golf course manager will coordinate the application of pesticides with the irrigation practices (the timing and application rates of irrigation water) to reduce runoff and the leaching of any applied pesticides and nutrients.
- (f) The Developer must employ a golf course manager licensed by the state to use restricted pesticides and experienced in the principles of IPM. The golf course manager will be responsible for ensuring that the golf course fertilizers are selected and applied to minimize fertilizer runoff into the surface water and the leaching of those same fertilizers into the groundwater.
- (g) The storage, mixing, and loading of fertilizer and pesticides will be designed to prevent/minimize the pollution of the natural environment. The golf course must comply with the publication "Best Management Practices for Golf Course Maintenance Departments, May 1995" published by the Florida Department of Environmental Protection.

8. Golf Cart Crossing

- (a) Golf course crossing of the Stewart Cypress Slough must be grade-separated. At grade golf cart crossings of this Slough are prohibited.
- (b) At the time of final plan approval, all proposed elevated golf cart crossings of the Slough must be reviewed and approved by the Lee County Division of Environmental Sciences. The review will include, but is not limited to, the structural requirements of the crossing and function of the Slough.

- 9. The wetland mitigation for buildout of the development, as depicted on Map H, has been identified in the ACOE Permit #199507483 (IP-MN) and SAJ1995-07483 (IP-MN), and SFWMD ERP No. 36-03568-P, as modified. In addition to mitigation as discussed in Condition II.E.2., requirements include a minimum of 354.0 acres of on-site wetland and upland preservation, restoration and enhancement in substantial compliance with the areas delineated as conservation areas (CO) on Map H. If modifications to

Map H are proposed to include additional land and/or impacts to required conservation areas, then jurisdictional agency review is required. Should additional land be added to the DRI, the impacts to wetlands on the additional lands will be reviewed in accordance with the laws in effect at that time. The inclusion of additional land will not subject the wetland mitigation identified in ACOE Permit #199507483 (IP-MN) and SAJ1995-07483 (IP-MN) to additional review or changes unless the applicant proposes changes to the wetland impacts and/or the required wetland mitigation.

F. WASTEWATER MANAGEMENT/WATER SUPPLY.

1. The project must incorporate water conserving devices or methods, including low volume water use plumbing fixtures, self-closing or metered water faucets. The water conserving devices must meet the criteria outlined in the water conservation plan of the public water supply permit issued to Gulf Environmental Services (GES) by SFWMD.
2. The Developer must obtain Water Use Permits for water withdrawals for landscape irrigation. Permits may only be issued for applications that meet the SFWMD criteria in effect at the time of permitting. Permits must be received prior to construction of the irrigation system.
3. Prior to the commencement of construction, plans and specifications for the water and wastewater collection system must be reviewed by Gulf Environmental Services, in accordance with their adopted rules and regulations.
4. The Developer must design potable water facilities in accordance with the Lee County Land Development Code (LDC). The LDC will also govern the applicable design for domestic and fire flow.
5. The Developer must comply with the LDC provisions that require the availability of adequate water and wastewater at the time of local final Development Order approval. Potable water, wastewater collection and treatment, and eventually non potable water must be obtained from Gulf Environmental Services. If GES is unable to provide the service, the Developer must construct interim potable water and wastewater treatment facilities, or postpone development until GES has sufficient capacity. Interim facilities must be constructed to LDC standards, and must be dismantled at the Developer's expense upon connection to GES facilities.
6. If the Developer utilizes treated effluent for irrigation, the Developer must buffer the on-site lakes, preserved wetlands, and storm water management system from possible effluent contamination in accordance with applicable SFWMD regulations.

7. Temporary septic systems may be used in conjunction with the construction office, sales offices, and model homes. Temporary septic systems must be properly abandoned and removed by a licensed septic system firm when permanent or interim wastewater treatment facilities are operational. Permanent septic systems are permitted for golf course restrooms. All other septic systems are prohibited.
8. The Developer must use the lowest quality of water available and acceptable for all non-potable water uses. Potable water may not be utilized for non-potable uses if adequate and acceptable non-potable water is readily available.

G. COMPREHENSIVE PLAN CONSISTENCY.

1. Lee County may not issue a local Development Order unless the Development Order is consistent with the County's Comprehensive Plan, Land Development Code, University Window Overlay, Ben Hill Griffin Parkway Access Management Plan, and Concurrency Management System.
2. The proposed commercial development is limited to no more than ~~1,140,000~~ 150,000 square feet of commercial retail, and office, ~~hotel, and research and development~~ uses, and 150 hotel rooms. This includes commercial located within property designated as C1, C-S, and MU on Map H. All commercial ancillary uses are included in this limitation; no residential or recreational ancillary uses or parking structures serving commercial or residential development are included in this amount. If multiple local development orders are requested, it is the developer's responsibility to provide a cumulative total of square footage from previous development order approvals prior to the issuance of the requested local development order.

H. FIRE.

1. The Developer must address its fire and emergency services impacts through the payment of impact fees in accordance with the schedule set forth in the Lee County Land Development Code.
2. When required by Superfund Amendments Reauthorization Act (SARA) Title III, and the Florida Hazardous Materials Emergency Response and Community Right to Know Act of 1988, the Developer must file hazardous materials reports and updates.

III. LEGAL EFFECT AND LIMITATIONS OF THIS DEVELOPMENT ORDER AND ADMINISTRATIVE REQUIREMENTS.

- A. Resolution. This Development Order constitutes a resolution of Lee County adopted by the Board of County Commissioners in response to the DRI ADA filed for Miromar Lakes DRI.
- B. Additional Developer Commitments. All commitments and impact mitigating actions volunteered by the Developer in the ADA and supplementary documents that are not in conflict with conditions or stipulations specifically enumerated above are incorporated by reference into this Development Order. These documents include, *but are not limited to the following:*
1. The Alico AMDA filed September 13, 1990, as amended by The Miromar Lakes Development of Regional Impact ADA sufficiency response filed November 10, 1997.
 2. The Miromar Lakes DRI sufficiency responses, stamped received on:
 - January 16, 1991
 - April 2, 1991
 - July 10, 1991
 - November 17, 1997
 - March 27, 1998
 - July 6, 1998
 3. The Miromar Lakes Notice of Proposed Change as amended by subsequent submittals.
- C. Master Plan of Development. Map H, dated ~~February 14, 2014~~ April 14, 2023, is attached hereto as Exhibit C, and is incorporated by reference. The Developer may modify the boundaries of development areas and the location of internal roadways to accommodate topography, vegetation, market conditions, traffic circulation, or other site related conditions as long as the modification meets local development regulations. However, this provision may not be used to reduce the size of wetland preserve areas. Precise wetland boundaries will be determined by the South Florida Water Management District, as delegated by the Department of Environmental Protection and the Army Corps. of Engineers.
- D. Binding Effect. This Development Order is binding upon the Developer(s), and its assignees or successors in interest. Where the Development Order refers to lot owners, business owners or other specific references, those provisions are binding on the entities or individuals referenced. Those portions of this Development Order that clearly apply only to the project Developer are binding upon any builder/Developer who acquires a tract or parcel of land within the DRI. The

Developer may impose or pass on the requirements of this DRI DO to ultimate purchasers through covenants that run with the land.

- E. Reliance. The terms and conditions and phasing schedule set out in this Development Order constitute a basis upon which the Developer and the County may rely in future actions necessary to fully implement the final development contemplated by this Development Order. The development parameters and phasing schedule upon which this Development Order approval is based is set forth in Exhibit B. Changes to the development mix or phasing schedule may require a reanalysis of project impacts in order to rebut a presumption of substantial deviation.
- F. Enforcement. All conditions, restrictions, stipulations and safeguards contained in this Development Order may be enforced by either party by action at law or equity. The cost of those proceedings, including reasonable attorney's fees, will be paid by the defaulting party.
- G. Successor Agencies. References to governmental agencies will be construed to mean future instrumentalities that may be created and designated as successors in interest to, or which otherwise possess the powers and duties of the referenced governmental agencies in existence on the effective date of this Development Order.
- H. Severability. If any portion or section of this Development Order is determined to be invalid, illegal or unconstitutional by a court of competent jurisdiction, that decision will not affect the remaining portions or sections of the Development Order, which will remain in full force and effect.
- I. Applicability of Regulations. This Development Order does not negate the Developer's responsibility to comply with federal, state, regional and local regulations.
- J. Further Review. Subsequent requests for local development permits do not require further DRI review pursuant to Section 380.06, Florida Statutes. However, upon a finding by the Board that any of the following conditions exist, the Board must order a termination of all development activity in that portion of the development affected by the substantial deviation until a DRI Application for Development Approval, Notice of Substantial Deviation or Notice of Proposed Change has been submitted, reviewed and approved in accordance with Section 380.06, Florida Statutes.
 - 1. There is a substantial deviation from the terms or conditions of this Development Order or other changes to the approved development plans that create a reasonable likelihood of adverse regional impacts or other regional impacts that have not been evaluated in the review by the Regional Planning Council; or

2. Expiration of the period of effectiveness of the Development Order. Any request to extend the effectiveness of this Development Order will be evaluated based on the criteria for the extension of the buildout date set forth in Section 380.06(19), Florida Statutes.
 3. Conditions in the development order that specify circumstances in which the development will be required to undergo additional DRI review. See 9J-2.025(10).
- K. Commencement of Physical Development. Substantial physical development of the project occurred no later than December 31, 2000. Further development must occur in accordance with the development parameters and phasing schedule set forth in Exhibit B.
- L. Buildout and Termination Dates. The project has a buildout date of ~~April 3, 2028~~September 4, 2050, and a termination date of ~~April 3, 2033~~September 2, 2055. No permits for development will be issued by the County subsequent to the termination date or expiration date unless the conditions set forth in Section 380.06(15)(g) are applicable.
- M. Assurance of Compliance. The administrative director of the Lee County Department of Community Development, or their designee, will be the local official responsible for assuring compliance with this Development Order. Lee County is primarily responsible for monitoring the development and enforcing the provisions of the development order. No permits or approvals will be issued if the developer fails to act in substantial compliance with the development order.
- N. Credits Against Local Impact Fees. Pursuant to Chapter 380.06(16), the Developer may be eligible for credits for contributions, construction, expansion, or acquisition of public facilities, if the Developer is also subject by local ordinances to impact fees or exactions to meet the same needs. However, no credit will be provided for internal on-site facilities required by County regulations or to any off-site facilities to the extent those facilities are necessary to provide safe and adequate services to the development.
- O. Protection of Development Rights. Assuming the project can comply with the County's Concurrency Management Program at the time development permits are requested, the project will not be subject to down-zoning, unit density reduction, intensity reduction or prohibition of development until December 30, 2030. If the County demonstrates at a public hearing that substantial changes have occurred in the conditions underlying the approval of this Development Order, or finds that the Development Order was based on substantially inaccurate information provided by the Developer, or that the change is clearly established by Lee County to be essential to public health, safety and welfare, then down-zoning

unit density reduction or prohibition of development may occur. [See 9J-2.025(3)(b)13]

- P. Biennial Reports. The Developer must submit a report biennially to the Lee County Department of Community Development, the SWFRPC and Florida DEO on Form RPM-BSP-Annual Report-1. The content of the biennial report must include the information set forth in Exhibit E, and must also be consistent with the rules of the FDCA. The first monitoring report must be submitted to the DRI coordinator for SWFRPC, FDEO, and Lee County not later than one year after the effective date of this Development Order. Further reporting must be submitted not later than two years from the previously submitted report, until buildout, whether actual or declared. Failure to comply with this biennial reporting procedure is governed by Section 380.06(18), Florida Statutes, which provides for the temporary suspension of the DRI Development Order.

The Developer must file the biennial monitoring reports until actual or declared buildout of the project. Miromar Lakes, L.L.C., is the party responsible for filing the biennial monitoring reports until one or more successor entities are named in the development order. The Developer must inform successors in title to the undeveloped portion of the real property covered by this Development Order of the biennial reporting requirement. Tenants or owners of individual lots or units have no obligation to comply with this reporting condition.

The Developer must also submit a transportation biennial report in accordance with the provisions set forth in Section II.D. of this development order.

- Q. Community Development District. The Developer elected to petition for the formation of a Uniform Community Development District to serve all or a portion of the project pursuant to Florida Statutes Chapter 190, as it may be in effect from time to time. Lee County hereby gives its approval that any such district may undertake the construction and/or funding of all or any of the mitigation and public infrastructure projects for which the Developer is responsible under the terms of this development order, whether within or without the boundaries of the district, and including the payment of mitigation amounts provided for in this development order, as a co-obligor hereunder. This provision shall not be construed to require the approval of any petition to form such a district, and in no event shall the Developer be released from its obligations under this Development Order.

- R. Transmittal and Effective Date. The County will forward certified copies of this Development Order to the SWFRPC, the Developer, and appropriate state agencies. This Development Order is rendered as of the date of that transmittal. In accordance with the requirements of Section 380.06(15)(f), Florida Statutes, once this development order is effective, the Developer must record notice of its adoption in the office of the Clerk of the Circuit Court of Lee County. The FDEO


and the SWFRPC offered no objections within 45 days after the application was submitted, and therefore have no ability to appeal the amended DRI DO.

Commissioner Greenwell made a motion to adopt the Eighth Development Order Amendment, seconded by Commissioner Ruane. The vote was as follows:


Kevin Ruane	Aye
Cecil L Pendergrass	Aye
Raymond Sandelli	Aye
Brian Hamman	Aye
Mike Greenwell	Aye

DULY PASSED AND ADOPTED this 7th day of June 2023.

ATTEST:
KEVIN KARNES, CLERK

BY: 
Deputy Clerk


BOARD OF COUNTY COMMISSIONERS
OF LEE COUNTY, FLORIDA

BY: 
Brian Hamman, Chair

RECEIVED
MINUTES OFFICE
MB
2023 JUN 12 PM 2:34



APPROVED AS TO FORM FOR THE
RELIANCE OF LEE COUNTY ONLY


Michael D. Jacob
Deputy County Attorney
County Attorney's Office

Exhibits:

- A. Legal Description
- B. Development Parameters and Phasing Schedule
- C. Map H dated April 14, 2023
- D. Pedestrian and Bicycle Facilities and Bus Stop Locations
- E. Biennial Monitoring Report Requirements
- F. Invasive exotic vegetation listed by Florida Pest Plant Council



950 Encore Way • P.O. Box 111629 • Naples, Florida 34108 • Phone: 239.254.2000 • Fax: 239.254.2098

HM PROJECT #2000106X
7/25/2011
REF. DWG. #A-1583-1
PAGE 2 OF 2

LEGAL DESCRIPTION:

A PARCEL OF LAND LOCATED IN A PORTION OF SECTIONS 10, 11, 14, 15 AND 23, TOWNSHIP 46 SOUTH, RANGE 25 EAST, LEE COUNTY, FLORIDA, BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

COMMENCE AT SOUTHEAST CORNER OF SECTION 23, TOWNSHIP 46 SOUTH, RANGE 25 EAST, LEE COUNTY, FLORIDA; THENCE RUN N.89°44'39"W., ALONG THE SOUTH LINE OF SAID SECTION 23, FOR A DISTANCE OF 651.54 FEET TO A POINT ON THE WESTERLY RIGHT-OF-WAY LINE OF BEN HILL GRIFFIN PARKWAY (A.K.A. TREELINE DRIVE), A 150.00 FOOT WIDE RIGHT-OF-WAY, RECORDED IN O.R. BOOK 2745, PAGES 1550 THROUGH 1554 OF THE PUBLIC RECORDS OF LEE COUNTY, FLORIDA AND TO THE POINT OF BEGINNING OF THE PARCEL OF LAND HEREIN DESCRIBED; THENCE CONTINUE N.89°44'39"W. ALONG THE SOUTH LINE OF SAID SECTION 23, FOR A DISTANCE OF 2,921.79 FEET TO A POINT ON THE EASTERLY RIGHT-OF-WAY LINE OF INTERSTATE 75; THENCE RUN N.18°17'51"W. ALONG THE EASTERLY RIGHT-OF-WAY LINE OF INTERSTATE 75, FOR A DISTANCE OF 955.62 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE EASTERLY; THENCE RUN NORTHERLY ALONG THE EASTERLY RIGHT-OF-WAY LINE OF INTERSTATE 75 AND ALONG THE ARC OF SAID CURVE TO THE RIGHT, HAVING A RADIUS OF 17,026.80 FEET, THROUGH A CENTRAL ANGLE OF 04°04'42", SUBTENDED BY A CHORD OF 1,211.72 FEET AT A BEARING OF N.16°15'30"W., FOR A DISTANCE OF 1,211.97 FEET TO THE END OF SAID CURVE; THENCE RUN N.14°13'09"W. ALONG THE EASTERLY RIGHT-OF-WAY LINE OF INTERSTATE 75, FOR A DISTANCE OF 9,126.68 FEET; THENCE RUN N.76°08'54"E., FOR A DISTANCE OF 527.61 FEET; THENCE RUN N.79°14'37"E., FOR A DISTANCE OF 501.77 FEET; THENCE RUN N.84°36'26"E., FOR A DISTANCE OF 384.54 FEET; THENCE RUN S.85°27'53"E., FOR A DISTANCE OF 381.51 FEET; THENCE RUN S.74°31'06"E., FOR A DISTANCE OF 209.92 FEET TO A POINT ON THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY AND A POINT ON A CIRCULAR CURVE, CONCAVE EASTERLY, WHOSE RADIUS POINT BEARS S.69°47'11"E., A DISTANCE OF 3,075.00 FEET THEREFROM; THENCE RUN SOUTHERLY ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY AND ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 3,075.00 FEET, THROUGH A CENTRAL ANGLE OF 23°44'14", SUBTENDED BY A CHORD OF 1,264.85 FEET AT A BEARING OF S.08°20'42"W., FOR A DISTANCE OF 1,273.94 FEET TO THE END OF SAID CURVE; THENCE RUN S.03°31'24"E. ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY, FOR A DISTANCE OF 3,887.79 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE EASTERLY; THENCE RUN SOUTHERLY ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY AND ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 2,000.00 FEET, THROUGH A CENTRAL ANGLE OF 20°33'03", SUBTENDED BY A CHORD OF 713.52 FEET AT A BEARING OF S.13°47'56"E., FOR A DISTANCE OF 717.36 FEET TO THE END OF SAID CURVE; THENCE RUN S.24°04'27"E. ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY, FOR A DISTANCE OF 1,593.09 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE NORTHEASTERLY; THENCE RUN SOUTHEASTERLY ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY AND ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 2,875.00 FEET, THROUGH A CENTRAL ANGLE OF 31°16'49", SUBTENDED BY A CHORD OF 1,550.16 FEET AT A BEARING OF S.39°42'52"E., FOR A DISTANCE OF 1,569.58 FEET TO THE END OF SAID CURVE; THENCE RUN S.55°21'16"E. ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY, FOR A DISTANCE OF

EXHIBIT A

HM PROJECT #2000106X
7/25/2011
REF. DWG. #A-1583-1
PAGE 2 OF 2

1,684.71 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE SOUTHWESTERLY; THENCE RUN SOUTHEASTERLY ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY AND ALONG THE ARC OF SAID CURVE TO THE RIGHT, HAVING A RADIUS OF 1,325.00 FEET, THROUGH A CENTRAL ANGLE OF $54^{\circ}31'33''$, SUBTENDED BY A CHORD OF 1,213.90 FEET AT A BEARING OF $S.28^{\circ}05'29''E.$, FOR A DISTANCE OF 1,260.94 FEET TO THE END OF SAID CURVE; THENCE RUN $S.00^{\circ}49'43''E.$ ALONG THE WESTERLY RIGHT-OF-WAY LINE OF SAID BEN HILL GRIFFIN PARKWAY, FOR A DISTANCE OF 600.19 FEET TO THE POINT OF BEGINNING; CONTAINING 396.652 ACRES, MORE OR LESS.

BEARINGS SHOWN HEREON REFER TO THE SOUTH LINE OF SECTION 23, TOWNSHIP 46 SOUTH, RANGE 25 EAST, OF LEE COUNTY, FLORIDA AS BEING $N.89^{\circ}44'39''W.$

THIS SKETCH AND LEGAL HAS BEEN PREPARED BASED UPON THE BANKS ENGINEERING, INC. PARCEL DESCRIPTIONS AS SHOWN ON DRAWINGS 1155SR, SHEETS 1 THROUGH 4, DATED 4/10/2000


HOLE MONTES, INC.
CERTIFICATE OF AUTHORIZATION NUMBER LB 1772

BY Thomas M. Murphy P.S.M. #5628
THOMAS M. MURPHY STATE OF FLORIDA



LINE TABLE		
LINE	DIRECTION	DISTANCE
L1	N 78°09'34" E	227.81'
L2	N 79°14'37" E	201.77'
L3	N 84°28'28" E	284.94'
L4	S 85°27'33" E	381.51'
L5	S 74°31'06" E	209.82'
L6	S 09°45'43" E	800.18'

CURVE	RADIUS	LENGTH	CHORD	BEARING	DELTA
C1	12028.80'	1211.87'	1211.77'	M 187°52'00" W	042°45'45"
C2	20723.00'	1273.84'	1284.80'	S 108°20'45" E	2°24'14"
C3	20900.00'	717.20'	713.52'	S 18°47'58" E	2°23'30"
C4	28725.00'	1568.58'	1550.15'	S 28°42'32" E	31°18'49"
C5	13395.00'	1269.84'	1231.80'	S 28°00'00" E	84°07'33"

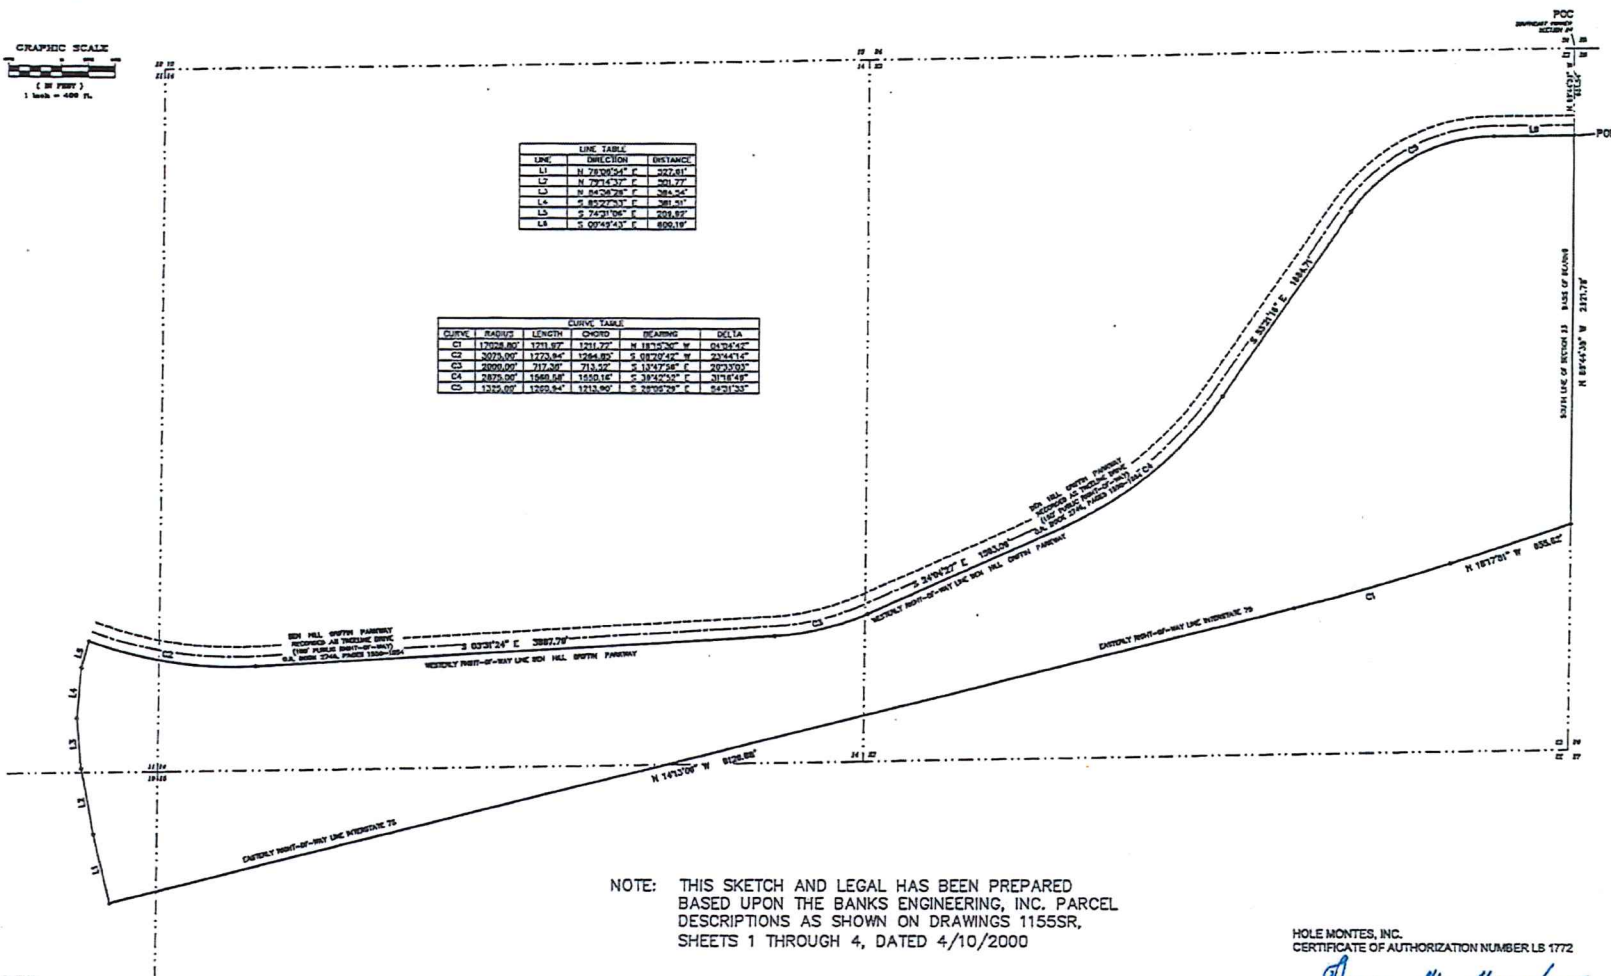

NOTE: THIS SKETCH AND LEGAL HAS BEEN PREPARED
BASED UPON THE BANKS ENGINEERING, INC. PARCEL
DESCRIPTIONS AS SHOWN ON DRAWINGS 1155SR,
SHEETS 1 THROUGH 4, DATED 4/10/2000

HOLE MONTES, INC.
CERTIFICATE OF AUTHORIZATION NUMBER LS 1772

BY Thomas M. Murphy
THOMAS M. MURPHY

P.S.M. #5628
STATE OF FLORIDA

* NOT A SURVEY *

MIROMAR LAKES

NOT VALID WITHOUT THE SIGNATURE AND THE ORIGINAL, RAISED SEAL OF A FLORIDA LICENSED SURVEYOR AND MAPPER.	PARTY CHECKED	DATE
	DRAWN BY TH	DATE 7/03
	CHECKED BY TJM	DATE 7/03
	VERTICAL SCALE N/A	HORIZONTAL SCALE 1" = 400'



950 Encore Way
Naples, FL 34110
Phone: (941) 254-2000
Florida Certificate of
Authorization No. 1772

SKETCH TO ACCOMPANY A LEGAL DESCRIPTION

DRAWING NO.	A-1583-1
PROJECT NO.	00.105X
REFERENCE NO.	WIR-WEST



950 Encore Way • Naples, Florida 34110 • Phone 239.254-2000 • Fax: 239.985.2099

HM PROJECT # 2000106X

2/09/2023

REF. DWG. A-1582-2

PAGE 1 OF 4

LEGAL DESCRIPTION:

A PARCEL OF LAND LOCATED IN A PORTION OF SECTIONS 11, 12, 13, 14, 23, AND 24, TOWNSHIP 46 SOUTH, RANGE 25 EAST, AND SECTION 18, TOWNSHIP 46 SOUTH, RANGE 26 EAST, LEE COUNTY, FLORIDA, BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

BEGIN AT THE SOUTHEAST CORNER OF SECTION 23, TOWNSHIP 46 SOUTH, RANGE 25 EAST, LEE COUNTY, FLORIDA; THENCE RUN N.89°44'39"W. ALONG THE SOUTH LINE OF SAID SECTION 23, FOR A DISTANCE OF 501.52 FEET TO A POINT ON THE EASTERLY RIGHT-OF-WAY LINE OF BEN HILL GRIFFIN PARKWAY (A.K.A. TREELINE DRIVE), A 150 FOOT WIDE RIGHT-OF-WAY, RECORDED IN O.R. BOOK 2745, PAGES 1550 THROUGH 1554 OF THE PUBLIC RECORDS OF LEE COUNTY, FLORIDA; THENCE RUN N.00°49'43"W. ALONG SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 603.03 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE SOUTHWESTERLY; THENCE RUN NORTHWESTERLY ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE AND ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 1,475.00 FEET, THROUGH A CENTRAL ANGLE OF 54°31'33", SUBTENDED BY A CHORD OF 1,351.32 FEET AT A BEARING OF N.28°05'29"W., FOR A DISTANCE OF 1,403.69 FEET TO THE END OF SAID CURVE; THENCE RUN N.55°21'16"W. ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 423.96 FEET; THENCE RUN N.38°37'17"E., FOR A DISTANCE OF 180.44 FEET; THENCE RUN N.40°45'20"W., FOR A DISTANCE OF 1,287.06 FEET; THENCE RUN N.51°22'43"W., FOR A DISTANCE OF 275.00 FEET; THENCE RUN N.20°50'23"W., FOR A DISTANCE OF 170.61 FEET; THENCE RUN N.03°26'59"W., FOR A DISTANCE OF 196.02 FEET; THENCE RUN N.49°19'44"E., FOR A DISTANCE OF 344.71 FEET; THENCE RUN S.54°09'13"E., FOR A DISTANCE OF 1,057.59 FEET; THENCE RUN S.05°08'14"W., FOR A DISTANCE OF 497.67 FEET; THENCE RUN S.87°48'55"E., FOR A DISTANCE OF 1,464.61 FEET; THENCE RUN N.88°17'13"E., FOR A DISTANCE OF 233.73 FEET; THENCE RUN S.31°47'37"E., FOR A DISTANCE OF 631.21 FEET; THENCE RUN N.62°11'53"E., FOR A DISTANCE OF 2,704.05 FEET; THENCE RUN N.21°20'50"E., FOR A DISTANCE OF 1,025.79 FEET; THENCE RUN N.02°13'31"W., FOR A DISTANCE OF 339.05 FEET; THENCE RUN N.73°40'08"E., FOR A DISTANCE OF 497.73 FEET; THENCE RUN N.84°27'10"E., FOR A DISTANCE OF 648.96 FEET; THENCE RUN N.20°19'20"W., FOR A DISTANCE OF 155.37 FEET; THENCE RUN N.04°47'10"W., FOR A DISTANCE OF 137.24 FEET; THENCE RUN N.10°20'25"E., FOR A DISTANCE OF 89.58 FEET; THENCE RUN N.88°40'48"W., FOR A DISTANCE OF 108.51 FEET; THENCE RUN N.35°22'24"E., FOR A DISTANCE OF 61.49 FEET; THENCE RUN N.24°10'35"E., FOR A DISTANCE OF 16.58 FEET; THENCE RUN N.16°58'33"E., FOR A DISTANCE OF 22.30 FEET; THENCE RUN N.01°25'10"W., FOR A DISTANCE OF 17.20 FEET; THENCE RUN N.02°00'52"E., FOR A DISTANCE OF 22.73 FEET; THENCE RUN N.10°34'22"E., FOR A DISTANCE OF 27.69 FEET; THENCE RUN N.08°31'29"E., FOR A DISTANCE OF 27.56 FEET; THENCE RUN N.04°17'29"W., FOR A DISTANCE OF 27.54 FEET; THENCE RUN N.03°50'00"E., FOR A DISTANCE OF 32.88 FEET; THENCE RUN N.05°16'54"E., FOR A DISTANCE OF 34.74 FEET; THENCE RUN N.14°36'53"W., FOR A DISTANCE OF 12.71 FEET; THENCE RUN N.49°59'45"W., FOR A DISTANCE OF 15.95 FEET; THENCE RUN N.67°08'11"W., FOR A DISTANCE OF 67.75 FEET; THENCE RUN N.67°33'34"E., FOR A DISTANCE OF 68.16 FEET; THENCE RUN N.57°34'58"E., FOR A DISTANCE OF 15.64 FEET; THENCE RUN

HM PROJECT # 2000106X

2/09/2023

REF. DWG. A-1582-2

PAGE 2 OF 4

N.53°45'20"E., FOR A DISTANCE OF 13.61 FEET; THENCE RUN N.58°32'02"E., FOR A DISTANCE OF 11.22 FEET; THENCE RUN N.54°40'50"E., FOR A DISTANCE OF 13.85 FEET; THENCE RUN N.49°36'55"E., FOR A DISTANCE OF 19.09 FEET; THENCE RUN N.37°17'03"E., FOR A DISTANCE OF 14.40 FEET; THENCE RUN N.25°04'13"E., FOR A DISTANCE OF 22.74 FEET; THENCE RUN N.30°25'33"E., FOR A DISTANCE OF 40.77 FEET; THENCE RUN S.70°47'07"E., FOR A DISTANCE OF 50.50 FEET; THENCE RUN N.19°32'42"E., FOR A DISTANCE OF 63.26 FEET; THENCE RUN N.62°41'55"E., FOR A DISTANCE OF 33.33 FEET; THENCE RUN N.60°03'38"E., FOR A DISTANCE OF 27.79 FEET; THENCE RUN N.68°56'32"E., FOR A DISTANCE OF 33.67 FEET; THENCE RUN N.69°27'09"E., FOR A DISTANCE OF 39.32 FEET; THENCE RUN N.76°09'54"E., FOR A DISTANCE OF 38.69 FEET; THENCE RUN N.84°37'56"E., FOR A DISTANCE OF 35.30 FEET; THENCE RUN N.71°01'39"E., FOR A DISTANCE OF 36.05 FEET; THENCE RUN N.56°16'09"E., FOR A DISTANCE OF 22.32 FEET; THENCE RUN N.54°45'23"E., FOR A DISTANCE OF 72.52 FEET; THENCE RUN N.43°40'48"E., FOR A DISTANCE OF 14.33 FEET; THENCE RUN N.36°37'28"E., FOR A DISTANCE OF 31.97 FEET; THENCE RUN N.16°15'53"E., FOR A DISTANCE OF 27.07 FEET; THENCE RUN N.00°14'32"W., FOR A DISTANCE OF 18.58 FEET; THENCE RUN N.01°01'18"W., FOR A DISTANCE OF 22.80 FEET; THENCE RUN N.11°30'29"E., FOR A DISTANCE OF 41.66 FEET; THENCE RUN N.25°25'32"E., FOR A DISTANCE OF 18.52 FEET; THENCE RUN N.29°13'14"E., FOR A DISTANCE OF 12.77 FEET; THENCE RUN N.09°42'26"E., FOR A DISTANCE OF 13.86 FEET; THENCE RUN N.10°10'17"W., FOR A DISTANCE OF 8.24 FEET; THENCE RUN N.25°29'33"W., FOR A DISTANCE OF 11.70 FEET; THENCE RUN N.71°45'42"W., FOR A DISTANCE OF 21.85 FEET; THENCE RUN N.59°03'27"W., FOR A DISTANCE OF 13.21 FEET; THENCE RUN N.37°04'03"W., FOR A DISTANCE OF 27.24 FEET; THENCE RUN N.00°38'43"W., FOR A DISTANCE OF 28.85 FEET; THENCE RUN N.10°12'59"E., FOR A DISTANCE OF 35.02 FEET; THENCE RUN N.01°52'01"E., FOR A DISTANCE OF 31.20 FEET; THENCE RUN N.05°34'22"E., FOR A DISTANCE OF 13.39 FEET; THENCE RUN N.01°01'36"W., FOR A DISTANCE OF 30.61 FEET; THENCE RUN N.15°40'00"W., FOR A DISTANCE OF 27.26 FEET; THENCE RUN N.22°54'25"W., FOR A DISTANCE OF 20.46 FEET; THENCE RUN N.20°19'15"W., FOR A DISTANCE OF 21.36 FEET; THENCE RUN N.17°17'45"W., FOR A DISTANCE OF 18.27 FEET; THENCE RUN N.25°34'23"W., FOR A DISTANCE OF 16.79 FEET; THENCE RUN N.15°41'23"W., FOR A DISTANCE OF 49.27 FEET; THENCE RUN N.00°29'10"W., FOR A DISTANCE OF 19.63 FEET; THENCE RUN S.65°22'51"W., FOR A DISTANCE OF 893.03 FEET; THENCE RUN S.62°02'33"W., FOR A DISTANCE OF 548.61 FEET; THENCE RUN N.84°00'27"W., FOR A DISTANCE OF 113.75 FEET; THENCE RUN S.73°01'40"W., FOR A DISTANCE OF 332.94 FEET; THENCE RUN S.88°47'09"W., FOR A DISTANCE OF 386.35 FEET; THENCE RUN N.01°12'51"W., FOR A DISTANCE OF 733.65 FEET; THENCE RUN N.75°24'23"E., FOR A DISTANCE OF 644.66 FEET; THENCE RUN N.02°55'16"W., FOR A DISTANCE OF 211.27 FEET; THENCE RUN N.19°49'36"E., FOR A DISTANCE OF 960.80 FEET; THENCE CONTINUE N.19°49'36"E., FOR A DISTANCE OF 21.27 FEET; THENCE RUN S.88°44'00"W., FOR A DISTANCE OF 3,706.01 FEET; THENCE RUN N.00°58'18"W., FOR A DISTANCE OF 320.16 FEET; THENCE RUN S.89°01'42"W., FOR A DISTANCE OF 450.42 FEET; THENCE RUN S.03°10'23"E., FOR A DISTANCE OF 430.66 FEET; THENCE RUN S.88°17'12"W., FOR A DISTANCE OF 1,027.71 FEET; THENCE RUN S.01°42'48"E., FOR A DISTANCE OF 306.15 FEET; THENCE RUN S.47°45'12"W., FOR A DISTANCE OF 1,504.06 FEET; THENCE RUN S.88°27'56"W., FOR A DISTANCE OF 1,780.04 FEET TO A POINT ON THE SAID EASTERLY RIGHT-OF-WAY LINE; THENCE RUN N.03°31'24"W. ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 34.30 FEET; THENCE RUN N81°31'53"E FOR A DISTANCE OF 59.36 FEET; THENCE RUN N86°42'41"E FOR A DISTANCE OF 91.78 FEET; THENCE RUN N50°02'46"E FOR A DISTANCE OF 136.19 FEET; THENCE RUN N58°59'16"E FOR A DISTANCE OF 150.29 FEET; THENCE RUN

HM PROJECT # 2000106X

2/09/2023

REF. DWG. A-1582-2

PAGE 3 OF 4

N03°34'13"E FOR A DISTANCE OF 280.42 FEET; THENCE RUN N44°21'15"E FOR A DISTANCE OF 65.32 FEET; THENCE RUN N85°08'17"E FOR A DISTANCE OF 193.00 FEET; THENCE RUN N53°18'11"E FOR A DISTANCE OF 221.46 FEET; THENCE RUN N85°09'35"E FOR A DISTANCE OF 62.26 FEET; THENCE RUN S40°09'41"E FOR A DISTANCE OF 165.57 FEET; THENCE RUN N70°32'55"E FOR A DISTANCE OF 188.24 FEET, TO THE BEGINNING OF A NON-TANGENTIAL CIRCULAR CURVE TO THE RIGHT; HAVING A RADIUS OF 850.00 FEET, THROUGH A CENTRAL ANGLE OF 21°55'50" AND BEING SUBTENDED BY A CHORD OF 323.36 FEET AT A BEARING OF N68°42'47"W, FOR AN ARC LENGTH OF 325.34 FEET; THENCE RUN N57°44'54"W FOR A DISTANCE OF 288.84 FEET, TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE TO THE LEFT; HAVING A RADIUS OF 650.00 FEET, THROUGH A CENTRAL ANGLE OF 35°46'31" AND BEING SUBTENDED BY A CHORD OF 399.30 FEET AT A BEARING OF N75°38'09"W, FOR AN ARC LENGTH OF 405.86 FEET; THENCE RUN S86°28'35"W FOR A DISTANCE OF 239.42 FEET, TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE TO THE LEFT; HAVING A RADIUS OF 50.00 FEET, THROUGH A CENTRAL ANGLE OF 90°00'00" AND BEING SUBTENDED BY A CHORD OF 70.71 FEET AT A BEARING OF S41°28'35"W, FOR AN ARC LENGTH OF 78.54 FEET TO A POINT ON THE SAID EASTERLY RIGHT-OF-WAY LINE; THENCE RUN N.03°31'24"W. ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 2370.30 FEET; TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE EASTERLY; THENCE RUN NORTHERLY ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE AND ALONG THE ARC OF SAID CURVE TO THE RIGHT, HAVING A RADIUS OF 2,925.00 FEET, THROUGH A CENTRAL ANGLE OF 23°44'13", SUBTENDED BY A CHORD OF 1,203.14 FEET AT A BEARING OF N.08°20'42"E., FOR A DISTANCE OF 1,211.79 FEET TO THE END OF SAID CURVE; THENCE RUN N.20°12'49"E. ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 473.55 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE WESTERLY; THENCE RUN NORTHERLY ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE AND ALONG THE ARC OF SAID CURVE TO THE LEFT, HAVING A RADIUS OF 10,075.00 FEET, THROUGH A CENTRAL ANGLE OF 19°11'28", SUBTENDED BY A CHORD OF 3,358.85 FEET AT A BEARING OF N.10°37'06"E., FOR A DISTANCE OF 3,374.60 FEET TO THE END OF SAID CURVE; THENCE RUN N.01°01'21"E. ALONG THE SAID EASTERLY RIGHT-OF-WAY LINE, FOR A DISTANCE OF 909.75 FEET; THENCE RUN S.89°42'24"E., FOR A DISTANCE OF 1,049.81 FEET; THENCE RUN S.01°00'21"E., FOR A DISTANCE OF 847.76 FEET; THENCE RUN S.04°19'45"W., FOR A DISTANCE OF 1,091.78 FEET; THENCE RUN S.00°39'26"E., FOR A DISTANCE OF 1,432.24 FEET; THENCE RUN S.00°16'17"E., FOR A DISTANCE OF 606.52 FEET; THENCE RUN N.88°47'46"E., FOR A DISTANCE OF 376.79 FEET; THENCE RUN S.40°48'12"E., FOR A DISTANCE OF 322.81 FEET; THENCE RUN S.19°01'17"E., FOR A DISTANCE OF 249.77 FEET; THENCE RUN S.88°53'28"E., FOR A DISTANCE OF 216.94 FEET; THENCE RUN S.24°26'51"E., FOR A DISTANCE OF 150.17 FEET; THENCE RUN S.77°09'26"E., FOR A DISTANCE OF 573.01 FEET; THENCE RUN S.88°10'13"E., FOR A DISTANCE OF 1,363.08 FEET; THENCE RUN S.19°42'28"E., FOR A DISTANCE OF 157.73 FEET; THENCE RUN S.87°09'14"E., FOR A DISTANCE OF 469.81 FEET; THENCE RUN N.88°02'24"E., FOR A DISTANCE OF 612.22 FEET; THENCE RUN S.21°30'12"E., FOR A DISTANCE OF 81.17 FEET; THENCE RUN N.88°10'32"E., FOR A DISTANCE OF 846.89 FEET; THENCE RUN N.88°10'32"E., FOR A DISTANCE OF 1,137.62 FEET; THENCE RUN S.20°09'57"E., FOR A DISTANCE OF 344.08 FEET; THENCE RUN S.89°48'06"E., FOR A DISTANCE OF 80.00 FEET; THENCE RUN S.20°09'57"E., FOR A DISTANCE OF 807.57 FEET; THENCE RUN S.15°43'44"E., FOR A DISTANCE OF 978.45 FEET; THENCE RUN S.89°46'43"E., FOR A DISTANCE OF 516.03 FEET TO THE BEGINNING OF A TANGENTIAL CIRCULAR CURVE, CONCAVE SOUTHWESTERLY; THENCE RUN SOUTHEASTERLY ALONG THE ARC OF SAID CURVE TO THE RIGHT, HAVING A RADIUS OF 500.00 FEET, THROUGH A CENTRAL ANGLE OF 88°55'56", SUBTENDED BY A CHORD OF 700.49

HM PROJECT # 2000106X

2/09/2023

REF. DWG. A-1582-2

PAGE 4 OF 4

FEET AT A BEARING OF S.45°18'45"E., FOR A DISTANCE OF 776.08 FEET TO THE END OF SAID CURVE; THENCE RUN S.00°50'47"E., FOR A DISTANCE OF 1,447.68 FEET; THENCE RUN S.09°57'20"W., FOR A DISTANCE OF 533.57 FEET TO A POINT ON THE EAST LINE OF SECTION 13, TOWNSHIP 46 SOUTH, RANGE 25 EAST; THENCE RUN S.00°50'47"E. ALONG THE EAST LINE OF SAID SECTION 13, FOR A DISTANCE OF 957.10 FEET TO THE NORTHWEST CORNER OF SECTION 24, TOWNSHIP 46 SOUTH, RANGE 25 EAST; THENCE RUN S.00°50'13"E. ALONG THE EAST LINE OF THE NORTHEAST ONE-QUARTER OF SADI SECTION 24, FOR A DISTANCE OF 2,639.78 FEET TO THE EAST QUARTER CORNER OF SAID SECTION 24; THENCE RUN S.00°48'26"E. ALONG THE EAST LINE OF THE SOUTHEAST ONE-QUARTER OF SAID SECTION 24, FOR A DISTANCE OF 2,643.97 FEET TO THE SOUTHEAST CORNER OF SAID SECTION 24; THENCE RUN S.89°28'32"W. ALONG THE SOUTH LINE OF SAID SECTION 24, FOR A DISTANCE OF 5,249.70 FEET TO THE POINT OF BEGINNING; CONTAINING 1,396.66 ACRES, MORE OR LESS.

BEARINGS SHOWN HEREON REFER TO THE SOUTH LINE OF SECTION 24, TOWNSHIP 46 SOUTH, RANGE 25 EAST, LEE COUNTY, FLORIDA AS BEING S.89°28'32"W.

THIS SKETCH AND LEGAL HAS BEEN PREPARED BASED UPON THE BANKS ENGINEERING, INC. PARCEL DESCRIPTIONS AS SHOWN ON DRAWINGS 1155SR, SHEETS 1 THROUGH 4, DATED 4/10/2000 AND DRAWINGS 1418SR, SHEETS 1 AND 2, DATED 7/13/2000.

HOLE MONTES, INC.

CERTIFICATE OF AUTHORIZATION NUMBER LB 1772

BY _____ P.S.M. #5628
THOMAS M. MURPHY STATE OF FLORIDA

EXHIBIT B
Page 1 of 2

DEVELOPMENT PARAMETERS AND PHASING SCHEDULE – 2027

LAND USE	ACRES
Residential	963
Commercial/Office/Hotel	84
Mixed Use	109
Lakes/Miscellaneous Recreation/Buffers	312
Conservation Areas	338

LAND USE	PHASE ONE	PHASE TWO	TOTAL
RESIDENTIAL	1,414	1,186	2,600
Single Family	314	386	700
Multiple Family	1,100	800	1,900
RETAIL COMMERCIAL (gfa)	160,000	90,000	250,000
HOTEL ROOMS	350	100	450
OFFICE (gfa)*	100,000	240,000	340,000
RESEARCH & DEVELOPMENT (gfa)	-	40,000	40,000
CLUBHOUSE	20,000	20,000	40,000
GOLF COURSE	18 Holes		18 Holes
BEACH PARK	10 Acres	-	10 Acres

EXHIBIT B
Page 2 of 2


	ANCILLARY BOATING FACILITIES					
	PHASE ONE			PHASE TWO		
	Slips	Day Slips	Boat Ramp	Slips	Day Slips	
Multiple-Family Parcel	25			25		
Beach Club	10	40	√			
Town Center	25	25	√	25	25	
Single Family Homes	Individual Docks as Applicable					
Boat Club				10	40	√

1. A maximum of 250 ancillary wet boat slips may be located in the "R", "R2", "C2", the Beach Club and the Boat Club tracts in addition to a dock for each single-family lakefront lot as of 11/29/1999.
2. Single-family docks may be converted to multiple-family slips on a 1:1 basis.
3. Up to 250 wet slips may be converted to dry storage associated with the Boat Club on a 1:1 basis.

DRI2022-00004 & DCI2022-00052


LEGEND

- C1 COMMERCIAL 1
CS COMMERCIAL SOUTH
MU MIXED USE
R RESIDENTIAL
GC GOLF COURSE
R2 RESIDENTIAL 2
L CONCEPTUAL LAKE LOCATION
CO CONSERVATION AREA
BHG PKWY ACCESS



LAND USE SUMMARY

DESCRIPTION	UNITS	APPROX. ACRES
RESIDENTIAL "R" AND "R2"		
SINGLE FAMILY UNITS	1,592 UNITS	953.1
MULTI-FAMILY UNITS	1,474 UNITS	
TOTAL UNITS	3,066 UNITS	
COMMERCIAL/OFFICE/HOTEL "C1", "CS" AND "C2"		84.1
RETAIL COMMERCIAL (GFA)	125,000 SQ FT	
HOTEL ROOMS	190 ROOMS	
OFFICE (GFA)	25,000 SQ FT	
MIXED USE "MU"		109.2
LAKE/MISCELLANEOUS RECREATION/BUFFERS/RIGHT-OF-WAY		292.3
CONSERVATION AREAS "CO" (INCLUDES WETLAND BUFFERS)		344.7
TOTAL ACRES		1,793

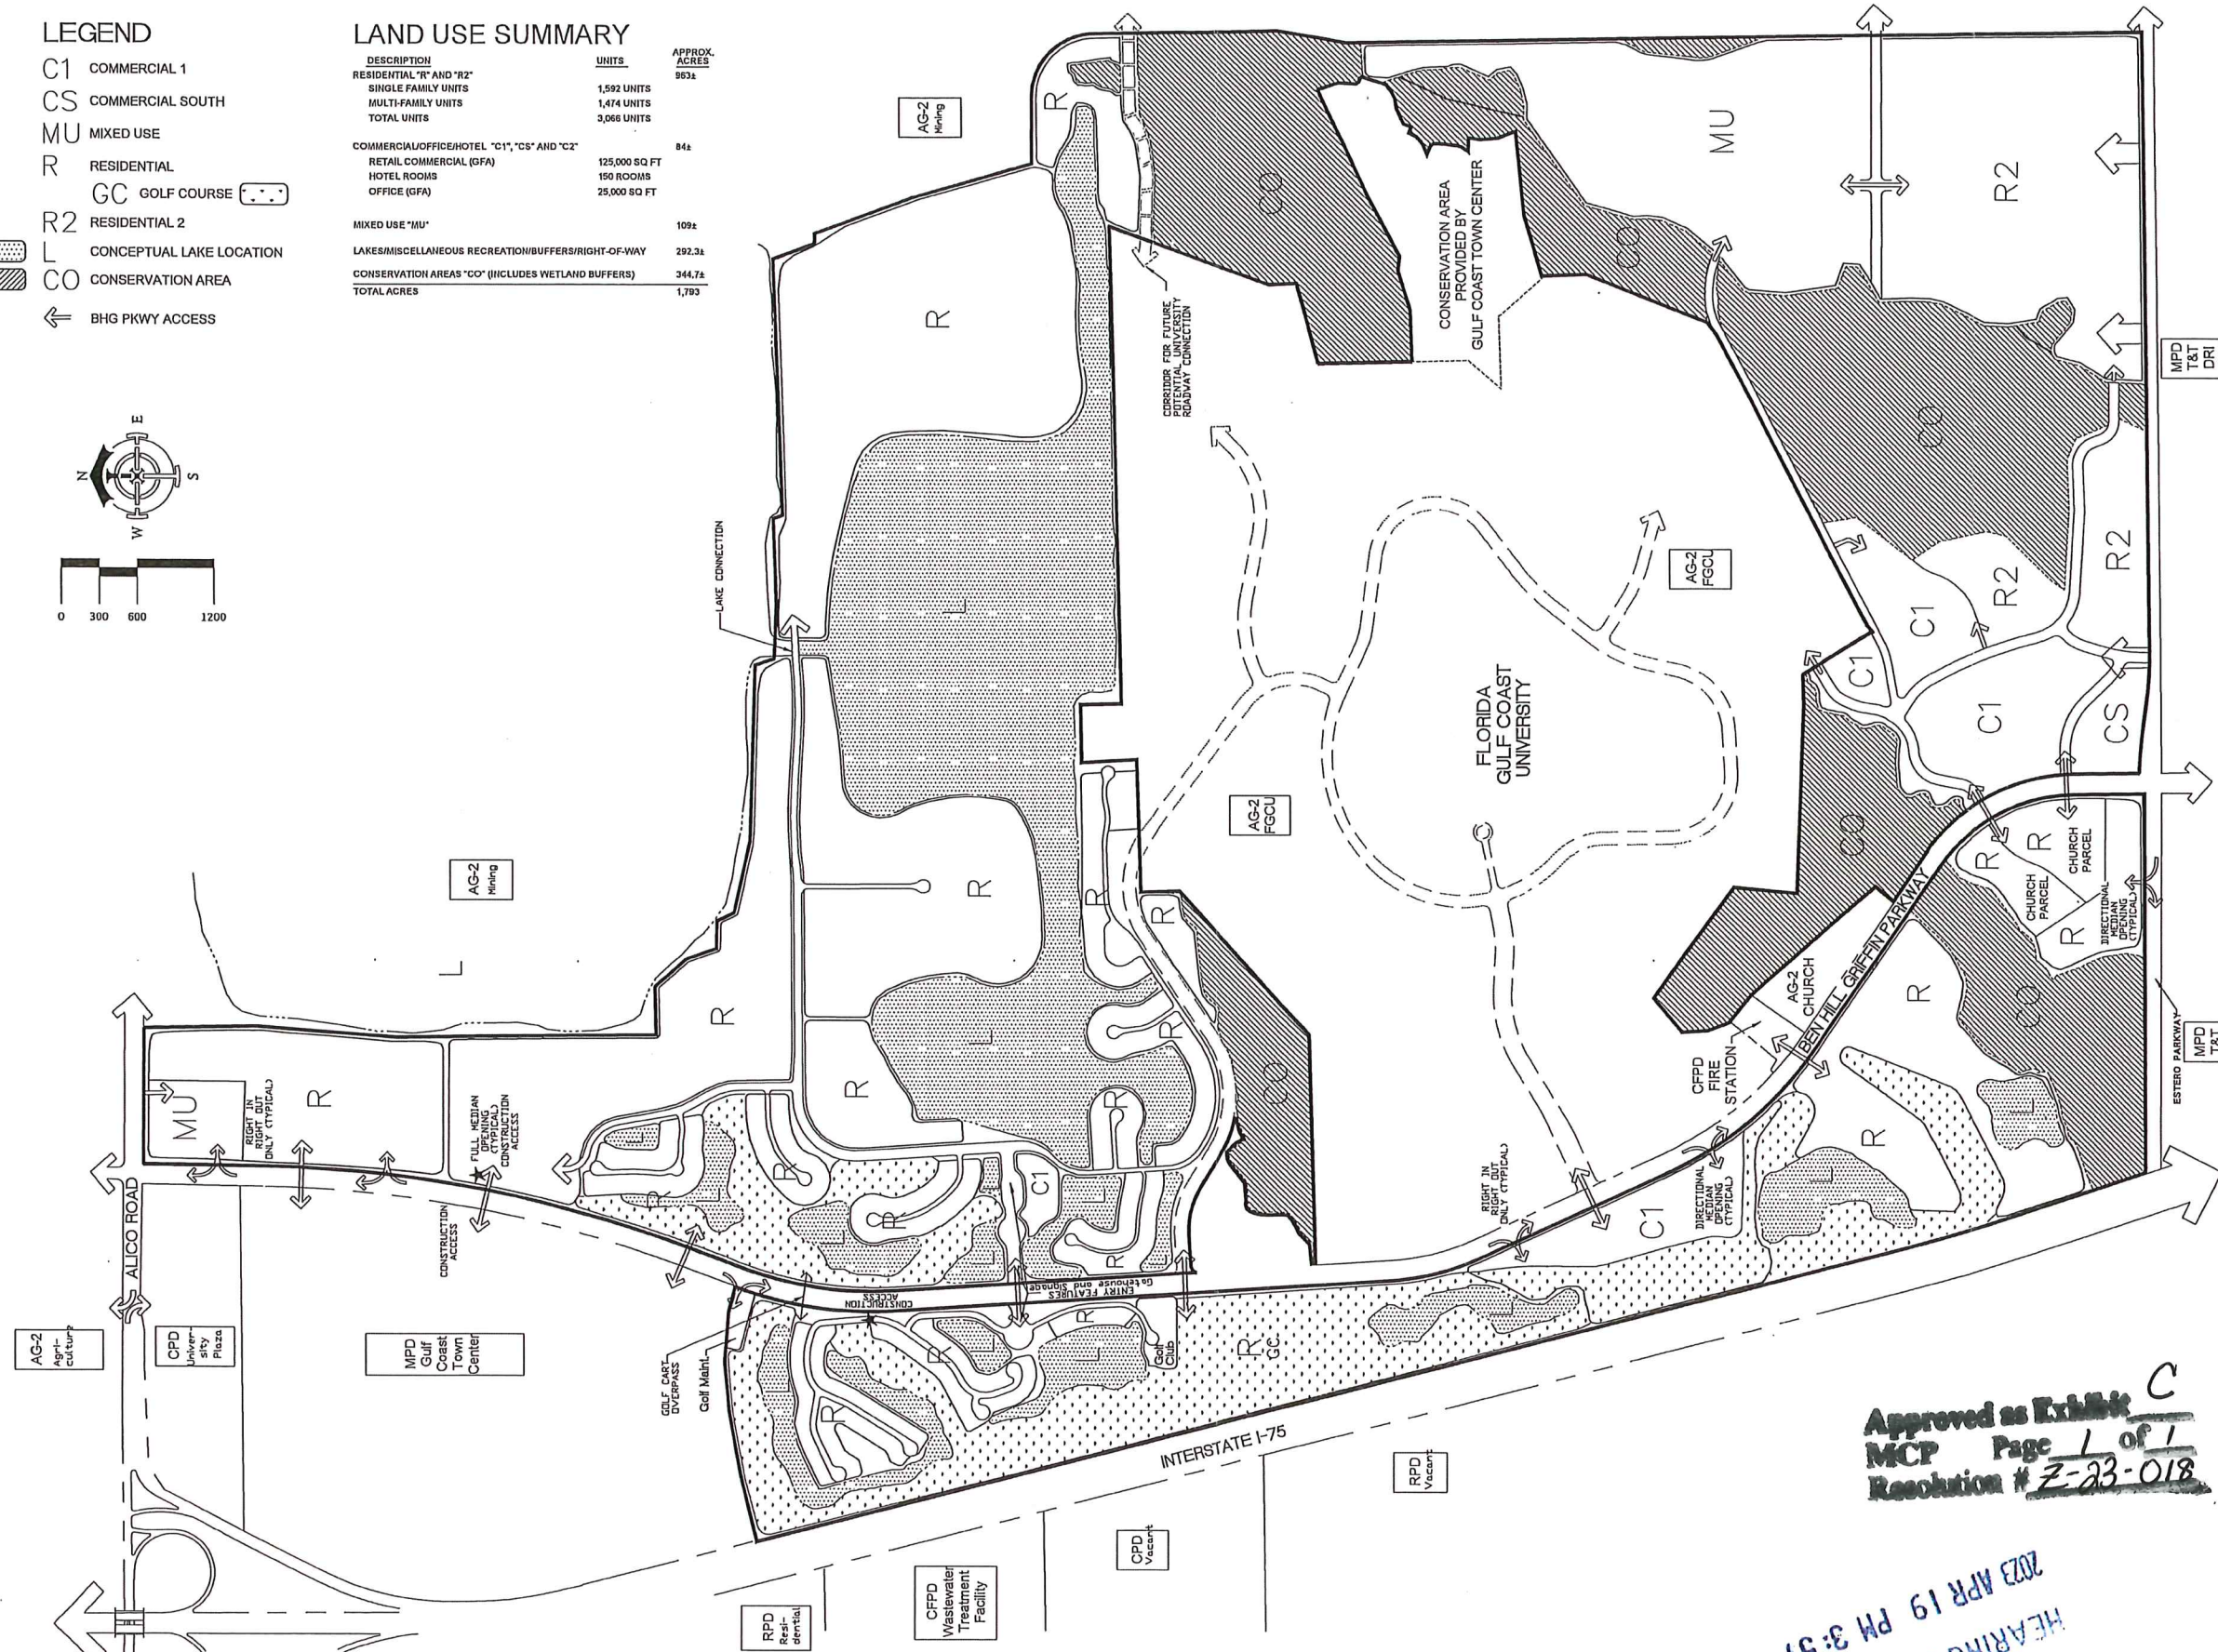

Approved as Exhibit C
MCP Page 1 of 1
Resolution # Z-23-018

2023 APR 19 PM 3:57
HEARING EXAMINER
LEE COUNTY

DELISI FITZGERALD, INC.
Planning - Engineering - Project Management
1605 Hendry Street
Fort Myers, FL 33901
239-418-0691 • 239-418-0692 fax
Florida Certificate of Authorization:
Engineering LB #: 26978



BEACH & GOLF CLUB
MIROMAR LAKES

PROJECT:
MIROMAR LAKES
MIROMAR LAKES, FL

PLAN REVISIONS:	DATE:	DESCRIPTION:

MAP H
APRIL 14, 2023

Project Manager: _____
Drawn By: _____ GWS
Checked By: _____
Project Number: 21248
Cad File: _____
Xref: _____
Xref: _____

Status:
FOR PERMITTING PURPOSES ONLY
NOT FOR CONSTRUCTION

Sheet Number: 01

DRI
EXHIBIT E
BIENNIAL MONITORING REPORT REQUIREMENTS

The Biennial Monitoring Report that must be submitted by the Developer in accordance with Subsections 380.06(15) and 380.06(18), Florida Statutes, and 9J-2.025(7), Florida Administrative Code, must include the following:


- A. Any changes in the plan of development or in the representations contained in the application for development approval, or in the phasing for the reporting year and for the next year;
- B. A summary comparison of development activity proposed and actually conducted for the year;
- C. Identification of undeveloped tracts of land, other than individual single family lots, that have been sold to separate entities or developers.
- D. Identification and intended use of lands purchased, leased, or optioned by the developer adjacent to the original DRI site since the development order was issued;
- E. A specific assessment of the developer's and the local government's compliance with each individual condition of approval contained in the DRI Development Order and the commitments which are contained in the application for development approval and which have been identified by the local government, the RPC, or the DCA as being significant;
- F. Any requests for substantial deviation determination that were filed in the reporting year and to be filed during the following year;
- G. An indication of a change, if any, in local government jurisdiction for any portion of the development since the development order was issued;
- H. A list of significant local, state, and federal permits which have been obtained or which are pending by agency, type of permit, permit number and purpose of each;
- I. A statement that all persons have been sent copies of the biennial report in conformance with Subsections 380.06(15) and (18), Florida Statutes;
- J. A copy of any recorded notice of the adoption of a development order or the subsequent modification of an adopted development order that was recorded by the developer pursuant to Paragraph 380.06(15)(f), Florida Statutes.

NOTE: The Florida Administrative Code specifically requires that the development order specify the requirements for the biennial report. The Administrative Code requires that the biennial report will be submitted to DCA, the RPC, and the local government on Form RPM-BSP-Annual Report-1.

EXHIBIT F

FLEPPC List Definitions: Exotic – a species introduced to Florida, purposefully or accidentally, from a natural range outside of Florida. Native – a species whose natural range includes Florida. Naturalized exotic – an exotic that sustains itself outside cultivation (it is still exotic; it has not “become” native). Invasive exotic – an exotic that not only has naturalized, but is expanding on its own in Florida native plant communities.

Abbreviations: Government List (Gov. List): P = Prohibited aquatic plant by the Florida Department of Agriculture and Consumer Services; N = Noxious weed listed by Florida Department of Agriculture & Consumer Services; U = Noxious weed listed by U.S. Department of Agriculture. Regional Distribution (Reg. Dist.): N = north, C = central, S = south, referring to each species' current distribution in general regions of Florida (not its potential range in the state). Please refer to the adjacent map.



Citation example:

FLEPPC. 2011. List of Invasive Plant Species. Florida Exotic Pest Plant Council. Internet: <http://www.fleppc.org/list/11list.htm> or *Wildland Woods* Vol. 14(3-4):11-14. Summer/Fall 2011.

The 2011 list was prepared by the FLEPPC Plant List Committee:

Keith A. Bradley – Chair (2006-present), The Institute for Regional Conservation, 22601 SW 152nd Ave., Miami, FL 33170, (305) 247-6547, bradley@regionalconservation.org

Janice A. Duquesnel, Florida Park Service, Florida Department of Environmental Protection, P.O. Box 1052, Islamorada, FL 33036, (305) 664-8455, Janice.Duquesnel@dep.state.fl.us

David W. Hall, Private Consulting Botanist, 3666 NW 13th Place, Gainesville, FL 32605, (352) 375-1370

Roger L. Hammer, Retired Naturalist and Author, 17360 Avocado Drive, Homestead, FL 33030, kskazi44@comcast.net

Patricia L. Howell, Broward County Parks, Environmental Section, 950 NW 38th St., Oakland Park, FL 33309, (954) 357-8137, phowell@broward.org

Collette C. Jacono, USDA/APHIS/PPQ, 1911 SW 34th Street, Gainesville, FL 32606, (352) 256-4458, Collette.C.Jacono@aphis.usda.gov

Kenneth A. Langeland, University of Florida-IFAS, Center for Aquatic and Invasive Plants, 7922 NW 71st St., Gainesville, FL 32653, (352) 392-9614, gnor8@ufl.edu

Chris Lockhart, Habitat Specialists, Inc., c/o P.O. Box 243116, Boynton Beach, FL 33424-3116, (561) 738-1179, chris@lockhartis.org

Gil Nelson, Gil Nelson Associates, 157 Leonard's Dr., Thomasville, GA 31792, gil@gilnelson.com

Robert W. Pemberton, Research Associate, Florida Museum of Natural History and Fairchild Tropical Botanic Garden, 2121 SW 28th Terrace, Fort Lauderdale, FL 33312, rpemberton5@gmail.com

Jim L. Sadle, Everglades National Park, 40001 State Road 9336, Homestead, FL 33034, (305) 242-7806, JimL.Sadle@nps.gov

Robert W. Simons, 1122 SW 11th Ave., Gainesville, FL 32601-7816

Daniel B. Ward, Department of Botany, University of Florida, 220 Bartram Hall, Gainesville, FL 32611

Richard E. Wunderlin, Institute for Systematic Botany, Dept. of Biological Sciences, University of South Florida, Tampa, FL 33620, (813) 974-2359, rwunder@usf.edu

For more information on invasive exotic plants, including links to related web pages, visit the Florida EPPC web site: <http://www.fleppc.org>

Application for Membership in the Florida Exotic Pest Plant Council

Annual Membership Levels (circle one)

Individual		Institutional	
Student	\$10	Library	\$100
General	\$30	General	\$100
Donor	\$75 +	Contributor	\$501 – \$10,000
		Patron	\$10,001 +

FLEPPC is a 501 (c) (3) nonprofit organization.

NAME _____

ORGANIZATION _____

MAILING ADDRESS _____

CITY, STATE, ZIP _____

TELEPHONE _____

FAX _____

E-MAIL _____

Mail application & dues, payable to FLEPPC, to:

Florida EPPC, Treasurer

PO Box 23426

Fort Lauderdale, FL 33307

(Or join online at www.fleppc.org)


Florida Exotic Pest Plant Council's 2011 List of Invasive Plant Species

The mission of the Florida Exotic Pest Plant Council is to support the management of invasive exotic plants in Florida's natural areas by providing a forum for the exchange of scientific, educational and technical information.

Purpose of the List:

To focus attention on —

- ▶ the adverse effects exotic pest plants have on Florida's biodiversity and native plant communities.
- ▶ the habitat losses in natural areas from exotic pest plant infestations.
- ▶ the impacts on endangered species via habitat loss and alteration.
- ▶ the need for pest-plant management.
- ▶ the socio-economic impacts of these plants (e.g., increased wildfires or flooding in certain areas).
- ▶ changes in the severity of different pest plant infestations over time.
- ▶ providing information to help managers set priorities for research and control programs.



www.fleppc.org

CATEGORY I

Invasive exotics that are altering native plant communities by displacing native species, changing community structures or ecological functions, or hybridizing with natives. This definition does not rely on the economic severity or geographic range of the problem, but on the documented ecological damage caused.

Scientific Name	Common Name	Gov. List	Reg. Dis.
<i>Abies procumbens</i>	rosary pea	N	C, S
<i>Acacia auriculiformis</i>	carle's acacia		C, S
<i>Albizia julibrissin</i>	mimosa, silk tree	N, C	
<i>Albizia lebbekii</i>	woman's tongue	C, S	
<i>Ardisia crenata</i>	coral ardisia	N, C, S	
<i>(A. crenata misapplied)</i>			
<i>Ardisia elliptica</i>	shoebutton ardisia	N	C, S
<i>(A. humilis misapplied)</i>			
<i>Asparagus acutipicus</i>	asparagus-fern		N, C, S
<i>(= A. sprengeri; A. densiflorus misapplied)</i>			
<i>Bauhinia variegata</i>	orchid tree		C, S
<i>Bischofia javanica</i>	bishopwood		C, S
<i>Calophyllum antillarum</i>	santol, masi wood		S
<i>(C. caniba and C. inophyllum misapplied)</i>	Alexandria laurel		
<i>Casuarina equisetifolia</i>	Australian-pine, beach sheoak	P, N	N, C, S
<i>Casuarina glauca</i>	suckering Australian-pine, P	N	C, S
<i>(= C. cunninghamiana)</i>	gray sheoak		
<i>Cinnamomum camphora</i>	camphor tree		N, C, S
<i>Cinchona scutellata</i>	wild iro		N, C, S
<i>Coburnia usatica</i>	lather leaf	N	S
<i>Cupressus anacardioides</i>	carrowood	N	C, S
<i>Deparia pterocaulis</i>	Japanese false spleenwort	I	N, C
<i>Dioscorea alata</i>	winged yam	N	N, C, S
<i>Dioscorea bulbifera</i>	air-potato	N	N, C, S
<i>Eichhornia crassipes</i>	water-hyacinth	P	N, C, S
<i>Eugenia uniflora</i>	Surinam cherry		C, S
<i>Ficus microcarpa</i> (<i>F. vitiata</i> and <i>F. retusa</i> var. <i>mildea</i> misapplied)	lateral fig		C, S
<i>Hydrilla verticillata</i>	hydrilla	P, U	N, C, S
<i>Hygonellia polyserma</i>	green hygro	P, U	N, C, S
<i>Hymenocallis amplexicaulis</i>	West Indian marsh grass		N, C, S
<i>Imperata cylindrica</i>	cogon grass	N, U	N, C, S
<i>(I. brasiliensis misapplied)</i>			
<i>Ipomoea aquatica</i>	water-spinach	P, U	C
<i>Jasminum dichotomum</i>	Gold Coast jasmine		C, S
<i>Jasminum fluminense</i>	Brazilian jasmine		C, S
<i>Lantana camara</i>	lantana, shrub verbena		N, C, S
<i>(= L. strigocamara)</i>			
<i>Ligustrum lucidum</i>	glossy privet		N, C
<i>Ligustrum sinense</i>	Chinese privet, hedge pelvet		N, C, S
<i>Lonicera japonica</i>	Japanese honeysuckle		N, C, S
<i>Luchelia peruviana</i>	Peruvian primrosewillow		N, C, S
<i>Lumnitzera racemosa</i>	krina; white-flowered mangrove		S
	black mangrove		
<i>Luziola subintegra</i>	Tropical American water grass		S
<i>Lygodium japonicum</i>	Japanese climbing fern	N	N, C, S
<i>Lygodium microphyllum</i>	Old World climbing fern	N, U	C, S

Scientific Name	Common Name	Gov. List	Reg. Dis.
<i>Macfadyena unguis-cat</i>	cat's-claw vine		N, C, S
<i>Manihara zapota</i>	sympodilla		S
<i>Melaleuca quinquenervia</i>	melaleuca, paper bark	P, N, U	C, S
<i>Melinis repens</i>	Natal grass		N, C, S
<i>(= Rhyssolochium repens)</i>			
<i>Mimosa nigra</i>	cactus mimosa	P, N, U	C, S
<i>Nandina domestica</i>	nandina, heavenly bamboo		N, C
<i>Nephrolepis brownii</i>	Asian sword fern		C, S
<i>(= N. multiflora)</i>			
<i>Nephrolepis cordifolia</i>	sword fern		N, C, S
<i>Neyraudia roynaudiana</i>	Burma reed, cane grass	N	S
<i>Nymphoides cristata</i>	snowflake		C, S
<i>Paecleria crassifolia</i>	sewer vine, onion vine		N, S
<i>Paecleria lictoria</i>	skunk vine	N	N, C, S
<i>Panicum repens</i>	weeping grass		N, C, S
<i>Panicum purpureum</i>	Napier grass		N, C, S
<i>Phymatosorus scolopendria</i>	serpentine fern, wart fern		S
<i>Pilea sarracenia</i>	water-lettuce	P	N, C, S
<i>Psidium cattleianum</i>	strawberry guava		C, S
<i>(= P. littorale)</i>			
<i>Psidium guajava</i>	guava		C, S
<i>Pueraria montana</i> var. <i>lobata</i>	loach	N	N, C, S
<i>(= P. lobata)</i>			
<i>Rhodymyrtus tomentosa</i>	downy rose-myrtle	N	C, S
<i>Rhyssolochium repens</i> (See <i>Melinis repens</i>)			
<i>Ruellia simplex</i>	Mexican penstemon		N, C, S
<i>Salvinia minima</i>	water spangles		N, C, S
<i>Salvinia minima</i>	water spangles		N, C, S
<i>Sapientia schifera</i>	papaya tree	N	N, C, S
<i>(= Triadica sebifera)</i>	Chinese tallow tree		
<i>Scaveola taccada</i>	scaveola, ball-flower	N	C, S
<i>(= Scaveola stricta; S. frutescens)</i>	beach papaya		
<i>Schefflera actinophylla</i>	schefflera, Queen's hand		C, S
<i>(= Brassala actinophylla)</i>	umbrella tree		
<i>Schinus terebinthifolius</i>	Brazilian pepper	P, N	N, C, S
<i>Scleria lacustris</i>	Wright's nutrush		C, S
<i>Senna pendula</i> var. <i>glabra</i>	climbing cassia		C, S
<i>(= Cassia columboides)</i>	Christmas cassia, Christmas senna		
<i>Solanum elaeagnifolium</i>	wetland nightshade	N, U	C, S
<i>(= S. huastecum)</i>	aquatic soda apple		
<i>Solanum villosum</i>	tropical soda apple	N, U	N, C, S
<i>Syngetium nodosum</i>	arrowhead vine		N, C, S
<i>Syzygium cumini</i>	jambolan-plum, Java-plum		C, S
<i>Tectaria lucida</i>	insected halberd fern		S
<i>Thespesia populnea</i>	scotch mahoe		C, S
<i>Triadocantia fluminensis</i>	small-leaf spiderwort		N, C
<i>Urena lobata</i>	Cassia's weed		N, C, S
<i>Utricularia maculata</i>	Fara grass		C, S
<i>(= Bracharia maculata)</i>			

CATEGORY II

Invasive exotics that have increased in abundance or frequency but have not yet altered Florida plant communities to the extent shown by Category I species. These species may become ranked Category I if ecological damage is demonstrated.

Scientific Name	Common Name	Gov. List	Reg. Dis.
<i>Adiantum pinnatifidum</i>	red sandalwood		S
<i>Agave sisalana</i>	sisal hemp		C, S
<i>Alcarites fordii</i> (= <i>Vernonia fordii</i>)	tung oil tree	N, C	
<i>Alstonia macrophylla</i>	devil tree		S
<i>Alteranthera phloxoides</i>	alligator weed	P	N, C, S
<i>Antigonon leptopus</i>	coral vine		N, C, S
<i>Ardisia japonica</i>	Japanese ardisia		N
<i>Artocarpus litoralis</i>	calien flower	N, C, S	
<i>Asystasia gangetica</i>	Ganges primrose		C, S
<i>Begonia cucullata</i>	wax begonia		N, C, S
<i>Blechnum pyramidalatum</i> (see <i>Ruellia blechnum</i>)			
<i>Broussonetia papyrifera</i>	papier mulberry	N, C, S	
<i>Bryocera gymnorhiza</i>	large-leaved mangrove		C, S
<i>Callitriche fragrans</i>	inch plant, spironema		C, S
<i>Callistemon viminalis</i>	hottlebrush		C, S
<i>(= Melaleuca viminalis)</i>	sweeping bottlebrush		
<i>Casuarina cunninghamiana</i>	river sheoak, Australian-pine	P	C, S
<i>Cecropia palmata</i>	trumpet tree		S
<i>Cestrum diurnum</i>	day jessamine		C, S
<i>Chamaecrista nictitans</i>	bamboo palm		S
<i>Clematis ternstroemia</i>	Japanese clematis		N, C
<i>Cocos nucifera</i>	coconut palm		S
<i>Cryptanthus madagascariensis</i>	rubber vine		C, S
<i>Cyperus involutus</i>	umbrella plant		C, S
<i>(C. alternifolius misapplied)</i>			
<i>Cyperus proflifer</i>	dwarf papyrus		C, S
<i>Dactyloctenium aegyptium</i>	Durban crowfootgrass	N, C, S	
<i>Dalbergia sissoo</i>	Indian rosewood, sissoo		C, S
<i>Elaeagnus pungens</i>	silverthorn, thorny olive	N, C	
<i>Elaeagnus umbellata</i>	silverberry, autumn olive	N	
<i>Epiphrasium pinnatum</i>	pothos		C, S
<i>Ev. aureum</i>			
<i>Ficus alissima</i>	false banyan, council tree		S
<i>Flacourdia indica</i>	governor's plum		S
<i>Henarthria elissima</i>	lappa grass		C, S
<i>(Hibiscus illicaeus (See Tallipitri illicaeus))</i>			
<i>Hyparrhenia rufa</i>	jambaja		N, C, S
<i>Ipomoea carnea</i> ssp. <i>ficulosa</i>	shrub morning-glory	P	C, S
<i>(= I. ficulosa)</i>			
<i>Kalanchoe pinnata</i>	life plant		C, S
<i>(= Bryophyllum pinnatum)</i>			
<i>Kocotaria elegans</i>	flamegold tree		C, S
ssp. <i>formosana</i> (= <i>K. formosana</i> ; <i>K. penicillata</i> misapplied)			
<i>Limnolobus punctata</i>	spotted duckweed		N, C, S
<i>(= Splendora punctata)</i>			
<i>Leucaena leucocarpa</i>	leucaena	N	N, C, S
<i>Limnophila sacculiflora</i>	Asian marshweed	P, U	N, C, S

Scientific Name	Common Name	Gov. List	Reg. Dis.
<i>Livistona chinensis</i>	Chinese fan palm		C, S
<i>Melia azadirach</i>	Chinaberry		N, C, S
<i>Melinis minutiflora</i>	Melassgrass		C, S
<i>Merrania tuberosa</i>	wood-rose		C, S
<i>Mikania micrantha</i>	mile-a-minute vine	N, U	S
<i>Murraya paniculata</i>	orange-jessamine		S
<i>Myriophyllum spicatum</i>	Eurasian water-milfoil	P	N, C, S
<i>Panicum maximum</i>	Guinea grass		N, C, S
<i>(= Urechis maxima, Megathyra maxima)</i>			
<i>Passiflora biflora</i>	two-flowered passion vine		S
<i>Pennisetum setaceum</i>	green fountain grass		S
<i>Phoenix reclinata</i>	Senegal date palm		C, S
<i>Phyllostachys aurea</i>	golden bamboo		N, C
<i>Pitcairnia spicata</i>	Philippine pitcairnia		S
<i>Pteris vittata</i>	Chinese brake fern	N, C, S	
<i>Psychotria elegans</i>	solitaire palm		S
<i>Rhago spathacea</i> (see <i>Indocalamus spathacea</i>)			
<i>Ricinus communis</i>	castor bean		N, C, S
<i>Rotala rotundifolia</i>	roundleaf toothcup		S
<i>Rotala rotundifolia</i>	dwarf Rotala, redweed		
<i>Ruellia blechnum</i>	green shrimp plant	N, C, S	
	Brownie blechnum		
<i>Sansseria hyacinthoides</i>	bowstring hemp		C, S
<i>Scabiosa punicea</i>	purple scabiosa, rattlebox		N, C, S
<i>Solanum diphyllum</i>	two-leaf nightshade		N, C, S
<i>Solanum torvum</i>	susumber, turkey berry	N, U	N, C, S
<i>Sphagneticola trilobata</i>	wedelia		N, C, S
<i>(= Wedelia trilobata)</i>			
<i>Stachytarpheta jamaicensis</i>	nettle-leaf porterweed		S
<i>(= S. urticifolia)</i>			
<i>Syngonium nananthifolium</i>	queen palm		C, S
<i>(= Arcastrum nananthifolium)</i>			
<i>Syzygium jambos</i>	Malabar plum, rose-apple	N, C, S	
<i>Tallipitri illicaeus</i>	mahoe, sea hibiscus		C, S
<i>(= Hibiscus illicaeus)</i>			
<i>Terminalia catappa</i>	tropical almond		C, S
<i>Terminalia muelleri</i>	Australian almond		C, S
<i>Tradescantia spathacea</i>	oyster plant		S
<i>(= Rhoeo spathacea, Rhoeo discolor)</i>			
<i>Trifolium cristatum</i>	puncture vine, burr-mut	N, C, S	
<i>Vitex trifolia</i>	simple-leaf chaste tree		C, S
<i>Washingtonia robusta</i>	Washington fan palm		C, S
<i>Wedelia</i> (see <i>Sphagneticola</i> above)			
<i>Wisteria sinensis</i>	Chinese wisteria		N, C
<i>Xanthoxylum sagittatum</i>	malanga, elephant ear		N, C, S

*Docuere include *Poa monstrosa* subsp. *formosa*, which is sold as "Green Island Pine" **Many names are applied to this species in Florida because of a complicated taxonomic and nomenclature history. Plants collected in Florida, all representing the same invasive species, have in the past been referred to as *Ruellia brittaniana*, *R. rooseana*, *R. roseana*, and *R. simplex*.

Exhibit
F

From: [Lennon, Stephen](#)
To: [Stephen Fehlhaber](#)
Subject: RE: Prestino at Miromar Lakes
Date: Monday, June 12, 2023 3:41:58 PM
Attachments: [image001.png](#)
[image002.png](#)
[image003.png](#)
[image004.png](#)
[Truck 53 Turning Analysis.pdf](#)
[Truck 53.pdf](#)

Caution! This message was sent from outside your organization.

[Allow sender](#) | [Block sender](#)

Good afternoon,

Please accept this email as approval for the newly proposed Prestino ingress/egress design layout with one stipulation:

The proposed dead-end cul-de-sac is designed to allow an unimpeded turnaround for our 100' aerial apparatus (see attachments for turning radius specs). The roadway design is to take into consideration not only street width & curb heights, but placement of landscaping (trees) and any street lighting.

Thank you,

Steve Lennon

Fire Marshal/Fire Investigator

San Carlos Park Fire & Rescue

Lee County Fire-Arson Task Force

239-267-7525 (office)

239-246-1152 (cell)

Lennon@sancarlosfire.org

From: Stephen Fehlhaber <SFehlhaber@consult-rwa.com>

Sent: Monday, June 5, 2023 2:24 PM

To: Lennon, Stephen <lennon@SanCarlosFire.org>

Subject: Prestino at Miromar Lakes

Good afternoon, Steve –

We are currently working on a Development Order for the above project. This site has a current Development Order under Capri at Miromar Lakes (DOS2019-00163). Upon doing some research, it appears that as part of the zoning condition, Lee County was requiring a sign-off from the fire department in reference to public safety ingress/egress. In the spirit of fulfilling this comment, can you please review the attached?

Attached is the proposed site plan and a location of map of the proposed project.

Please reply to this email if you have any (or no) questions or concerns.

Much appreciated.

Thanks,



Stephen C. Fehlhaber

Staff Engineer

OFFICE | 239.597.0575

DIRECT | 239.597.7496

EMAIL | sfehlhaber@consult-rwa.com

