ADMINISTRATIVE AMENDMENT (PD) ADD2026-00010

ADMINISTRATIVE APPROVAL
LEE COUNTY, FLORIDA

WHEREAS, RESPEC Company LLC filed an application for an administrative amendment to a Residential Planned Development (RPD) known as Homes at 81 West for property generally located along the east side of Blasingim Road and south of Penzance Boulevard, and more particularly described as follows:

LEGAL DESCRIPTION: In Section 08, Township 45 South, Range 25 East, Lee County, Florida:

ATTACHED AS EXHIBIT “A”

WHEREAS, the subject property is located in the Central Urban Future Land Use Category as designated by the Lee Plan; and

WHEREAS, Resolution Z-22-034 rezoned the subject ±9.97-acre property from Agricultural (AG-2) to Residential Planned Development (RPD) to allow a 90-dwelling unit residential community under unified control (see Exhibit “D”); and

WHEREAS, the Master Concept Plan approved by Resolution Z-22-034 was subsequently amended through Administrative Amendment ADD2025-00160 to modify the lot and roadway configuration and relocate the amenity center, dog walk area, pump station, and primary accessway; and

WHEREAS, the applicant now requests an additional amendment to the approved Master Concept Plan to revise the primary access configuration, rotate the amenity center and pool area within the approved amenity location, replace previously approved on-street amenity parking with a dedicated off-street parking area, and incorporate additional on-street parking throughout the internal roadway network (see Exhibits “B” and “C”); and

WHEREAS, the requested amendment also includes deviations from LDC Sections 34-2015(2)c. and 34-2013(a) to permit perpendicular on-street parking spaces accessible from the internal roadway system and to allow vehicles to back into the private roadway from such parking spaces; and

WHEREAS, all previously approved deviations established through Resolution Z-22-034 remain unchanged and in full force; and

WHEREAS, the proposed MCP revisions are limited in scope, do not increase approved density or intensity, and are not anticipated to generate additional off-site impacts beyond those previously evaluated under Resolution Z-22-034; and

WHEREAS, Section “D-D” has been added to Sheet Number 2 of the revised Master Concept Plan to depict a typical on-street parking cross section associated with the proposed perpendicular on-street parking configuration within the internal roadway network (see Exhibit “B”); and

WHEREAS, LDC Section 34-2013(a) authorizes the Director to administratively approve parking configurations requiring vehicles to back into a private roadway within residential developments where the roadway is privately owned and maintained, low-volume, and local in nature, and where the parking spaces serve amenities to the development and comply with applicable dimensional standards; and

WHEREAS, Lee County Development Services staff has reviewed the proposed on-street parking configuration, associated cross section details, and requested deviations, and has no objection to the requested amendment and deviations as proposed; and

WHEREAS, the Lee County Land Development Code provides for certain administrative amendments to planned development master concept plans; and

WHEREAS, the subject application and plans have been reviewed by the Lee County Department of Community Development in accordance with applicable regulations for compliance with all terms of the administrative approval procedures; and

WHEREAS, it is found that the proposed amendment does not increase density or intensity within the development; does not decrease buffers or open space required by the LDC; does not underutilize public resources or infrastructure; does not reduce total open space, buffering, landscaping or preservation areas; and does not adversely impact surrounding land uses.

NOW, THEREFORE, IT IS HEREBY DETERMINED that the application for administrative approval of an amendment to the Residential Planned Development is **APPROVED, and subject to the following conditions:**

1. **Development of the property must be consistent with the amended two-page Master Concept Plan entitled “Homes at 81 West Master Concept Plan,” prepared by RESPEC Company LLC, and attached hereto as Exhibit “B.”**

2. **Approved Deviations 1 through 6, established through Resolution Z-22-034, remain in full force and effect.**

3. **<u>Deviation # 7</u> from LDC Section 34-2015(2)c. to allow perpendicular on-street parking spaces accessible from the internal roadway system is hereby APPROVED, subject to compliance with Section “D-D” on Page 2 of the amended two-page Master Concept Plan, including the depicted roadway cross-section, parking configuration, and associated dimensional standards.**

4. **<u>Deviation # 8</u> from LDC Section 34-2013(a) to allow vehicles to back into the private roadway system from perpendicular on-street parking spaces is hereby APPROVED.**

5. **ADD2025-00160 is hereby superseded by this zoning action and is null and void.**

6. **The terms and conditions of Resolution Z-22-034 remain in full force and effect, except as modified specifically herein.**

7. **If it is determined that inaccurate or misleading information was provided to the County or if this decision does not comply with the LDC when rendered, then, at any time, the Zoning Manager may issue a modified decision that complies with the Code or revoke the decision. If the approval is revoked, the applicant may acquire the necessary approvals by filing an application for public hearing in accordance with Chapter 34.**

Duly passed, adopted, and electronically signed on 06/02/2026
Anthony R. Rodriguez, AICP, CPM, Zoning Manager
Community Development

<u>Exhibits:</u>
Exhibit A – Legal Description
Exhibit B – Amended Master Concept Plan
Exhibit C – Applicant's Request Statement and Deviation Justification
Exhibit D – Resolution Z-22-034

SKETCH AND DESCRIPTION
OF A PARCEL LYING IN SECTION 8, TOWNSHIP 45 SOUTH RANGE 25 EAST, LEE COUNTY, FLORIDA

LEGAL DESCRIPTION

METES AND BOUNDS DESCRIPTION AS PREPARED BY THIS FIRM

THE SOUTHEAST QUARTER OF THE SOUTHWEST QUARTER OF THE SOUTHWEST QUARTER OF SECTION 8, TOWNSHIP 45 SOUTH, RANGE 25 EAST, LEE COUNTY FLORIDA, DESCRIBED AS INSTRUMENT #2022000117440, PUBLIC RECORDS OF LEE COUNTY, FLORIDA AND BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

COMMENCE AT A 6"X6" CONCRETE MONUMENT AT THE SOUTH QUARTER CORNER OF SAID SECTION 8; THENCE S 88°45'48" W, ALONG THE SOUTH LINE OF SAID FRACTION, FOR A DISTANCE OF 1317.16 FEET TO THE NORTHEAST CORNER OF PRATTS PRESERVE PHASE 3, ACCORDING TO THE PLAT THEREOF RECORDED AS INSTRUMENT #2025000112818, OF THE PUBLIC RECORDS OF LEE COUNTY, FLORIDA AND THE POINT OF BEGINNING OF THE PARCEL HEREIN DESCRIBED; THENCE CONTINUE S 88°45'48" W., ALONG THE NORTH LINE OF SAID PLAT, FOR A DISTANCE OF 658.58 TO THE SOUTHWEST CORNER OF SAID SOUTHEAST QUARTER OF THE SOUTHWEST QUARTER OF THE SOUTHWEST QUARTER OF SAID SECTION 8 AND A POINT AT THE CENTER OF BLASINGIM ROAD, A 60 FOOT NON-COUNTY MAINTAINED ROADWAY; THENCE N 01°21'03" W, ALONG THE WEST LINE OF SAID FRACTION AND SAID CENTERLINE, FOR A DISTANCE OF 660.77 FEET TO A POINT ON THE SOUTH LINE OF PENZANCE BOULEVARD, AS MONUMENTED AND MAINTAINED AND DESCRIBED IN DEED BOOK 243, AT PAGE 480, OF SAID PUBLIC RECORDS; THENCE N 88°46'19" E, ALONG THE NORTH LINE OF SAID FRACTION AND THE SOUTH LINE OF SAID PENZANCE BOULEVARD, FOR A DISTANCE OF 656.78 FEET TO THE NORTHEAST CORNER OF SAID FRACTION AND THE NORTHWEST CORNER OF CORAL WOODS, AS DESCRIBED IN OFFICIAL RECORDS BOOK 1778, PAGE 2345 OF SAID PUBLIC RECORDS; THENCE S 01°30'25" E, ALONG THE EAST LINE OF SAID FRACTION AND THE WEST LINE OF SAID CORAL WOODS, FOR A DISTANCE OF 660.67 FEET TO THE POINT OF BEGINNING.

PARCEL CONTAINS 9.98 ACRES, MORE OR LESS

THIS SKETCH AND DESCRIPTION HAS BEEN ELECTRONICALLY SIGNED AND SEALED BY DENIS J. O'CONNELL, Jr. USING A DIGITAL SIGNATURE AND DATE. PRINT COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

DENIS J. O'CONNELL JR. LICENSE NUMBER LS 5430 STATE OF FLORIDA PROFESSIONAL SURVEYOR & MAPPER

Denis J. O'Connell Jr.

Digitally signed by Denis J. O'Connell Jr.
Date: 2026.01.20 14:21:17 -05'00'

BY: _____
DENIS J. O'CONNELL Jr.
PROFESSIONAL SURVEYOR AND MAPPER
FLORIDA CERTIFICATE NO. LS# 5430

NOT VALID WITHOUT THE SIGNATURE AND THE ORIGINAL SEAL OF A FLORIDA LICENSED SURVEYOR AND MAPPER.

NOTES:

1. BEARINGS ARE BASED ON THE SOUTH LINE OF THE SOUTHWEST QUARTER OF SECTION 8, TWP 45S, RNG 25E AS BEARING S 88°45'48" W.

2. DISTANCES ARE IN US SURVEY FEET AND DECIMALS THEREOF.

3. PARCEL IS SUBJECT TO EASEMENTS, RESERVATIONS OR RESTRICTIONS AND RIGHT-OF-WAYS (RECORDED AND UNRECORDED, WRITTEN AND UNWRITTEN).

4. THE STATE PLANE COORDINATES SHOWN HEREON ARE IN FEET, FLORIDA WEST ZONE, NORTH AMERICAN DATUM OF 1983 (2011 ADJUSTMENT) BASED UPON CONTINUOUSLY OPERATING FLORIDA PERMANENT REFERENCE NETWORK (FPRN) STATIONS MAINTAINED BY THE FLORIDA DEPARTMENT OF TRANSPORTATION.

5. RECORDING INFORMATION SHOWN HEREON RELATES TO THE PUBLIC RECORDS OF LEE COUNTY, FLORIDA.

* THIS IS NOT A SURVEY *

TITLE:	LEGAL DESCRIPTION			

KEYSTONE
A CLS COMPANY
www.keystoneconsultants.net

10970 S. CLEVELAND AVE.
SUITE #605
FORT MYERS, FLORIDA 33907
PHONE: (239) 275-8575
FAX: (239) 275-8457

LB #8331


FILE NAME:	FIELD BOOK/PAGE:	PROJECT NO.:	SHEET:
15751SK 0A	775/09	15751	1 OF 2


EXHIBIT DATE:	DRAWN BY:	SCALE:	CHECKED BY:	FILE NO. (S-T-R)
1/20/26	BUD	1" = 150'	DJO	8-45-25

ADD2026-00010 Lee County ePlan

SKETCH AND DESCRIPTION

OF A PARCEL LYING IN SECTION 8, TOWNSHIP 45 SOUTH, RANGE 25 EAST, LEE COUNTY, FLORIDA

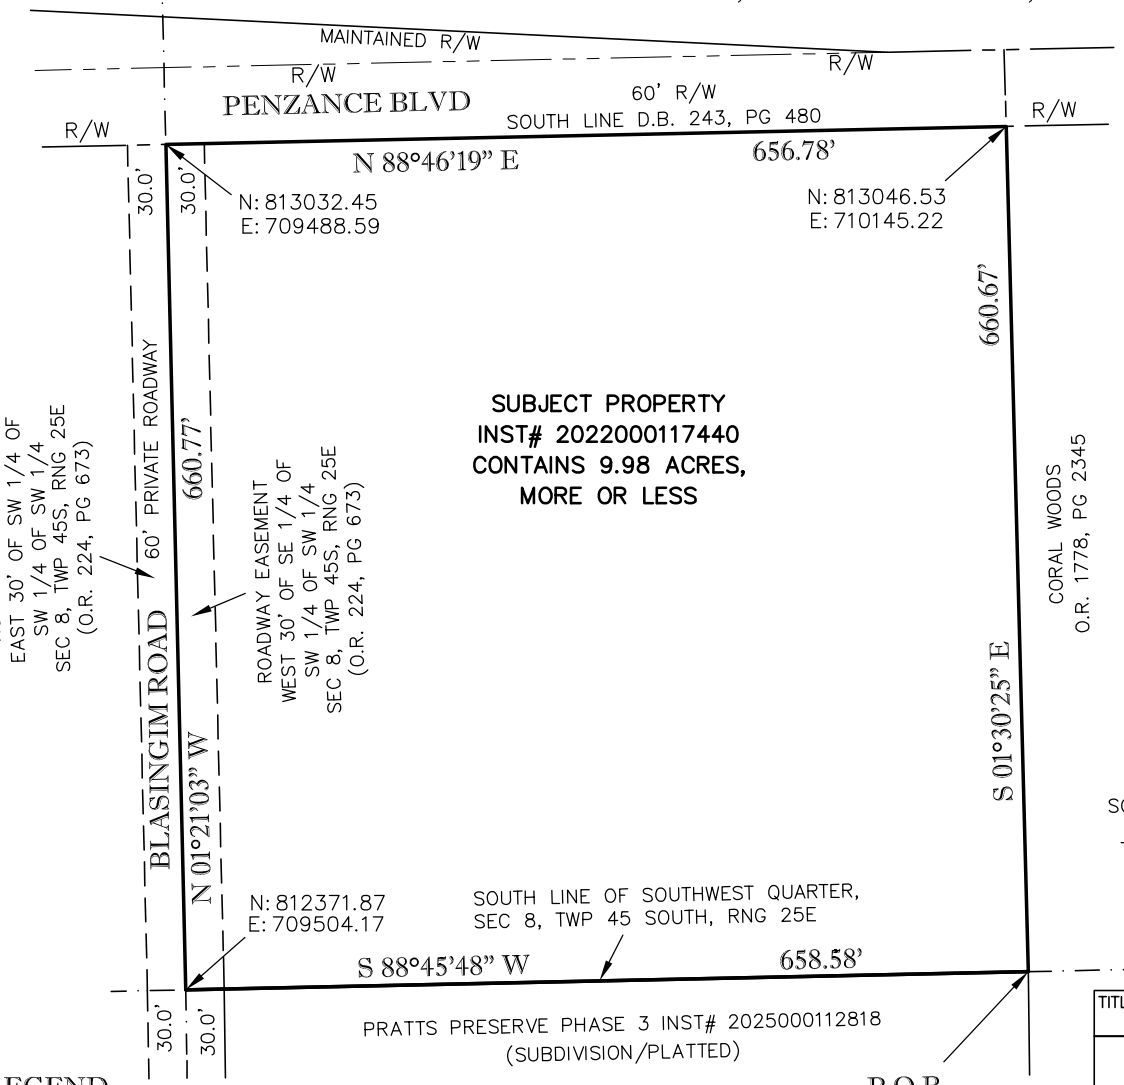



NOTES:

1. BEARINGS ARE BASED ON THE SOUTH LINE OF THE SOUTHWEST QUARTER OF SECTION 8, TWP 45S, RNG 25E AS BEARING S 88°45'48" W.

2. DISTANCES ARE IN US SURVEY FEET AND DECIMALS THEREOF.

3. PARCEL IS SUBJECT TO EASEMENTS, RESERVATIONS OR RESTRICTIONS AND RIGHT-OF-WAYS (RECORDED AND UNRECORDED, WRITTEN AND UNWRITTEN).

4. THE STATE PLANE COORDINATES SHOWN HEREON ARE IN FEET, FLORIDA WEST ZONE, NORTH AMERICAN DATUM OF 1983 (2011 ADJUSTMENT) BASED UPON CONTINUOUSLY OPERATING FLORIDA PERMANENT REFERENCE NETWORK (FPRN) STATIONS MAINTAINED BY THE FLORIDA DEPARTMENT OF TRANSPORTATION.

5. RECORDING INFORMATION SHOWN HEREON RELATES TO THE PUBLIC RECORDS OF LEE COUNTY, FLORIDA.

LEGEND

P.O.C. = POINT OF COMMENCEMENT
P.O.B. = POINT OF BEGINNING
SEC = SECTION
TWP = TOWNSHIP
RNG = RANGE
INST = INSTRUMENT
N: = NORTHING
E: = EASTING

O.R. = OFFICIAL RECORDS BOOK
D.B. = DEED BOOK
PG = PAGE
R/W = RIGHT OF WAY
FCM = FOUND CONCRETE MONUMENT


* THIS IS NOT A SURVEY *

TITLE: SKETCH OF DESCRIPTION

KEYSTONE
A CLS COMPANY
www.keystoneconsultants.net
10970 S. CLEVELAND AVE.
SUITE #605
FORT MYERS, FLORIDA 33907
PHONE: (239) 275-8575
FAX: (239) 275-8457
LB #8331

FILE NAME:	FIELD BOOK/PAGE:	PROJECT NO.:	SHEET:
15751SK 0A	775/09	15537	2 OF 2

EXHIBIT DATE:	DRAWN BY:	SCALE:	CHECKED BY:	FILE NO. (S-T-R)
1/20/26	BUD	1" = 150'	DJO	8-45-25

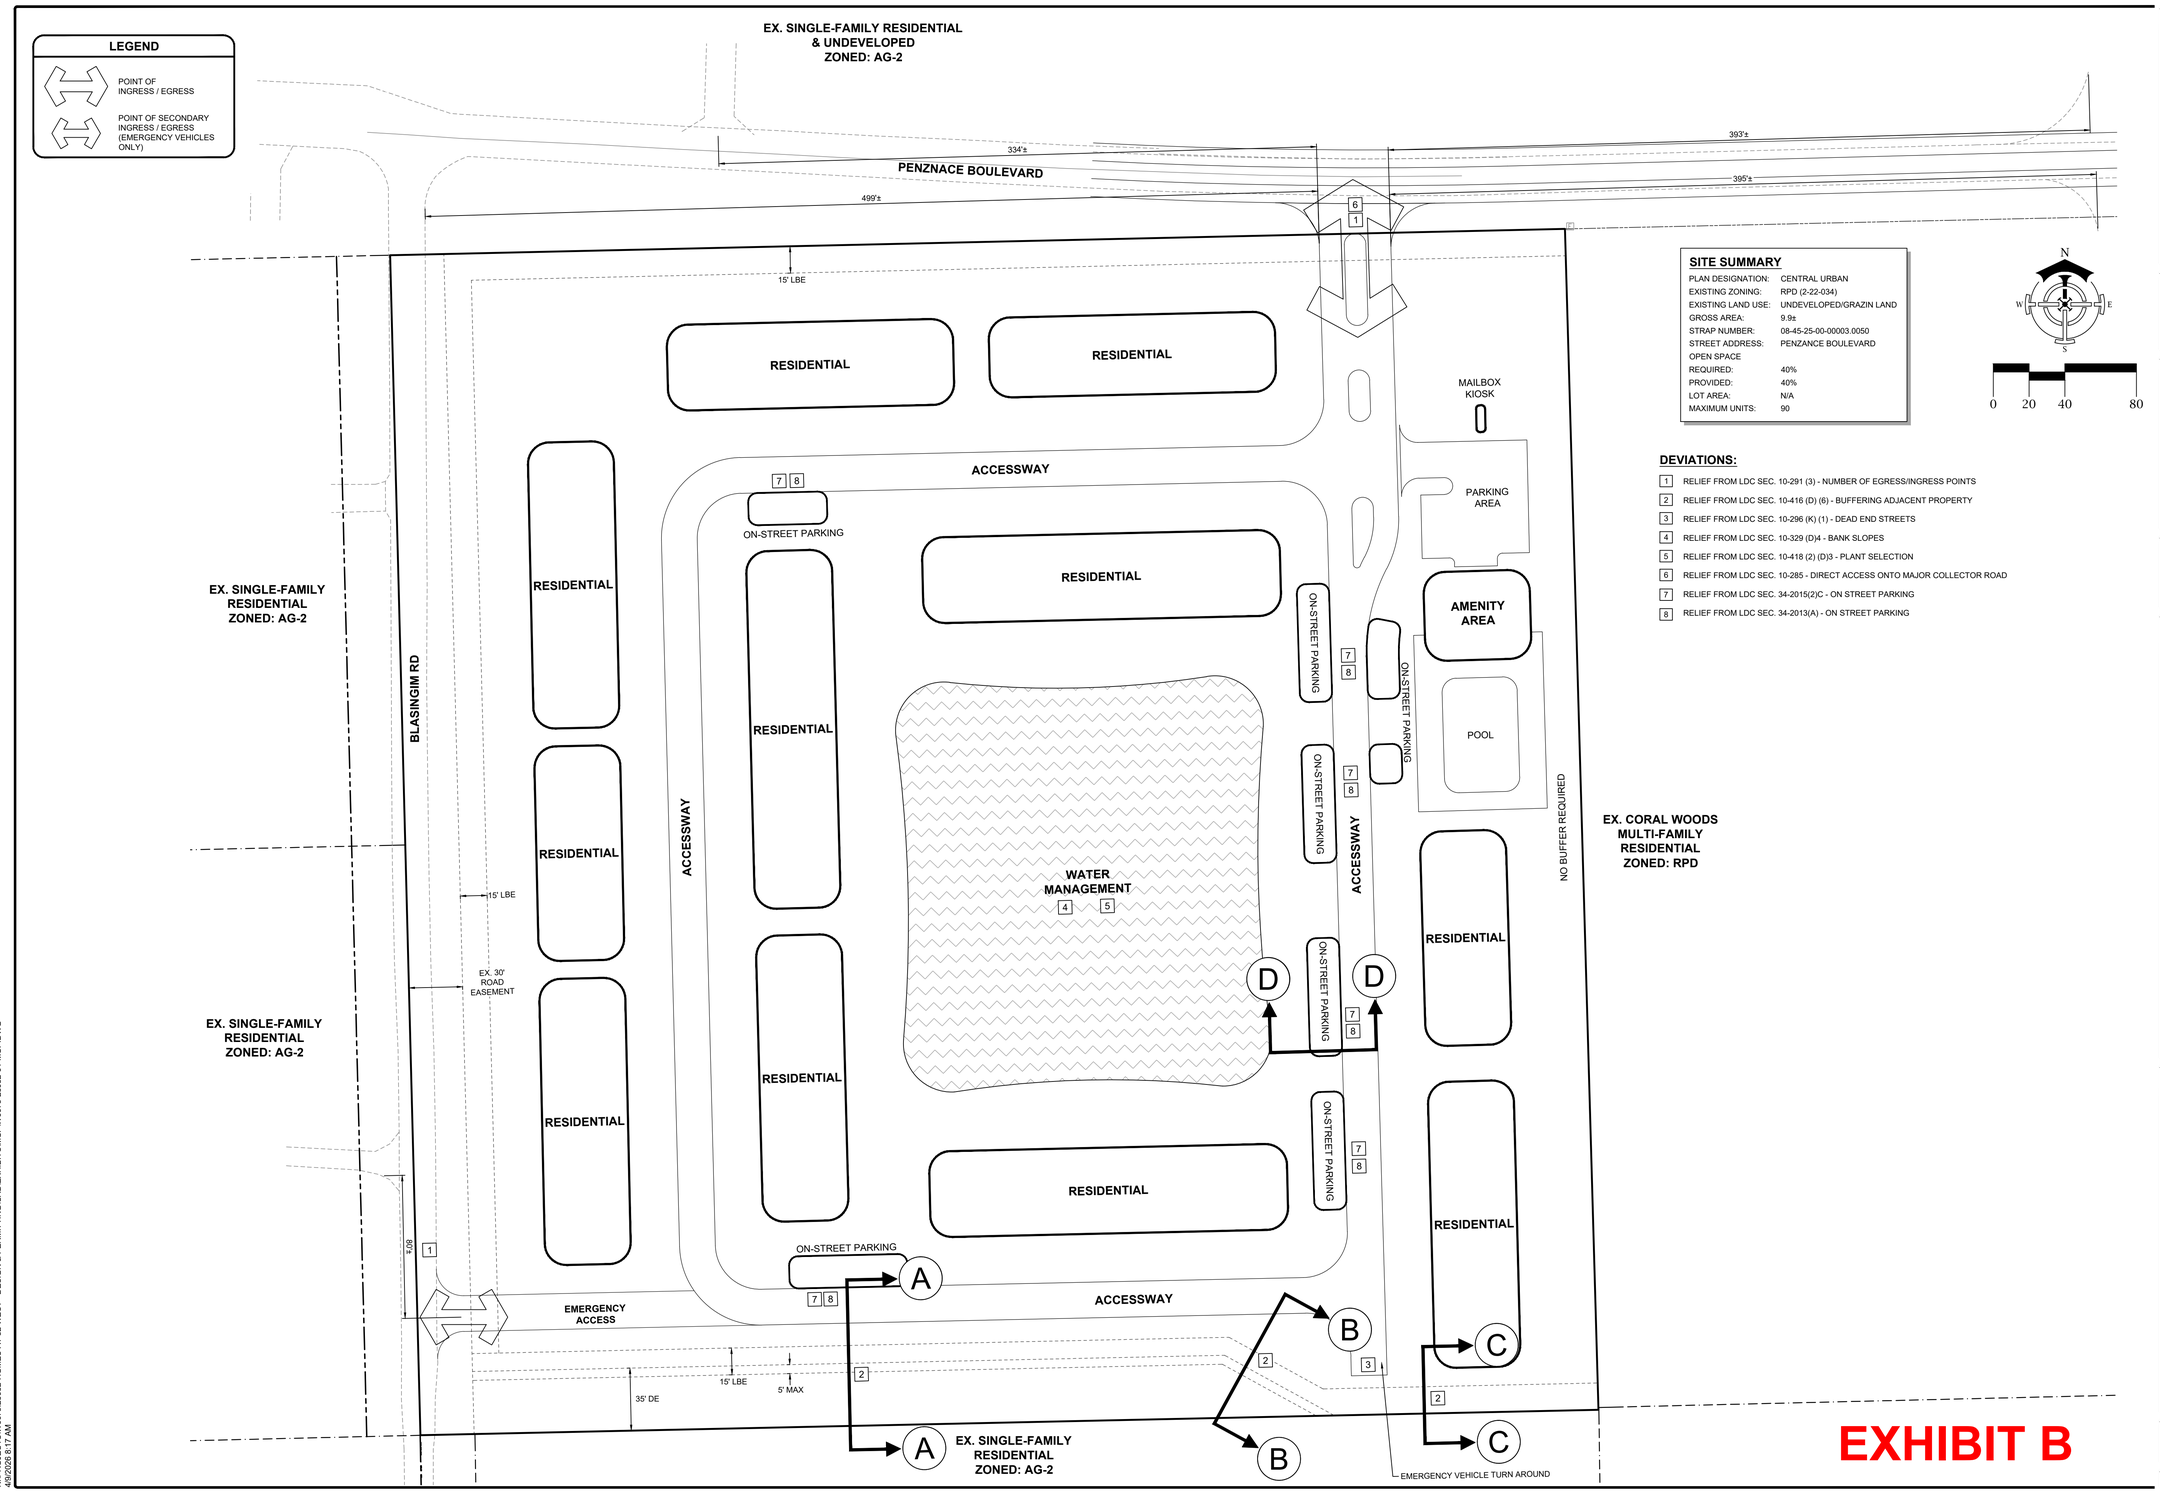

SITE SUMMARY

PLAN DESIGNATION:	CENTRAL URBAN
EXISTING ZONING:	RPD (2-22-034)
EXISTING LAND USE:	UNDEVELOPED/GRAZIN LAND
GROSS AREA:	9.9±
STRAP NUMBER:	08-45-25-00-00003.0050
STREET ADDRESS:	PENZANCE BOULEVARD
OPEN SPACE	
REQUIRED:	40%
PROVIDED:	40%
LOT AREA:	N/A
MAXIMUM UNITS:	90

N

W E

S

0 20 40 80

DEVIATIONS:

1. RELIEF FROM LDC SEC. 10-291 (3) - NUMBER OF EGRESS/INGRESS POINTS
2. RELIEF FROM LDC SEC. 10-416 (D) (6) - BUFFERING ADJACENT PROPERTY
3. RELIEF FROM LDC SEC. 10-296 (K) (1) - DEAD END STREETS
4. RELIEF FROM LDC SEC. 10-329 (D)4 - BANK SLOPES
5. RELIEF FROM LDC SEC. 10-418 (2) (D)3 - PLANT SELECTION
6. RELIEF FROM LDC SEC. 10-285 - DIRECT ACCESS ONTO MAJOR COLLECTOR ROAD
7. RELIEF FROM LDC SEC. 34-2015(2)C - ON STREET PARKING
8. RELIEF FROM LDC SEC. 34-2013(A) - ON STREET PARKING

EXHIBIT B

RESPEC
1412 Jackson Street, Suite #1
Fort Myers, FL 33901
(239) 418-0691
Florida Registry License No. 33253

AREA RESERVED FOR AGENCY USE

OWNER / DEVELOPER:
LENNAR
4491 SIX MILE CYPRESS PARKWAY
FORT MYERS, FL 33966
(239) 278-1177

PROJECT:
HOMES AT 81 WEST

PLAN REVISIONS

#	DATE	DESCRIPTION

MASTER CONCEPT PLAN


Project Manager:	ADF
Drawn By:	AB
Project Number:	W0079-25082
County, State:	LEE COUNTY, FL

Status:


Sheet Number: 1

N:\PROJECTS\W0079.25082-HOMES AT 82 WEST - DESIGN & PERMITTING\CAD\EXHIBITS\MCP\W0079-25082-01-MCP.DWG
4/9/2026 8:17 AM


ADD2026-00010 Lee County ePlan

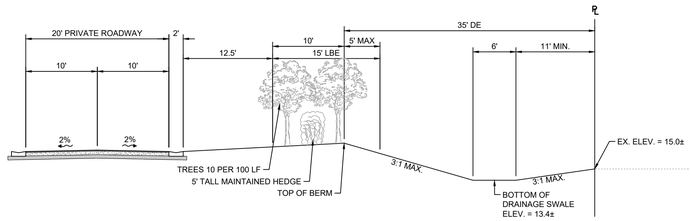

SECTION A-A
NTS

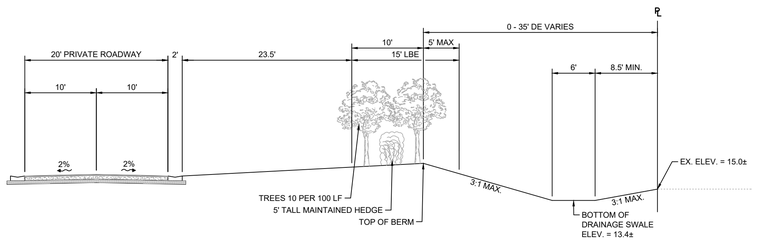

SECTION B-B
NTS



SECTION C-C
NTS



SECTION D-D
NTS

RESPEC
1412 Jackson Street, Suite #1
Fort Myers, FL 33901
(239) 418-0691

Florida Registry License No. 33253

AREA RESERVED FOR AGENCY USE

OWNER / DEVELOPER:
LENNAR
10481 SIX MILE CYPRESS PARKWAY
FORT MYERS, FL 33966
(239) 278-1177

PROJECT:
HOMES AT 81 WEST

#	DATE	PLAN REVISIONS DESCRIPTION

DEVIATION #2
CROSS SECTIONS

Project Manager:	ADF
Drawn By:	AB
Project Number:	W0079-25082
County, State:	LEE COUNTY, FL

Status:

Sheet Number: 2

N:\PROJECTS\W0079.25082-HOMES AT 82 WEST - DESIGN & PERMITTING\CAD\EXHIBITS\MCP\W0079-25082-02-MCP-TYP-SECTIONS.DWG
4/9/2026 8:17 AM

HOMES AT 81 WEST RPD
ADD REQUEST NARRATIVE

SUMMARY OF REQUEST

The subject property is located along the east side of Blasingim Road and south of Penzance Boulevard in Lee County, Florida.

The attached application requests an Administrative Amendment to the currently approved Master Concept Plan (MCP) for the Homes at 81 West Residential Planned Development (RPD).

The MCP was originally approved under Resolution No. Z-22-034 and most recently amended under ADD2025-00160, approved on February 5, 2026. This request (ADD2026-00010) proposes changes to the most recently approved MCP as summarized below.

1. **Access Adjustment:** The primary access/driveway configuration has been revised from the alignment approved under ADD2025-00160, shifting back toward a configuration more consistent with the original MCP approved under Z-22-034.
2. **Amenity Center Rotation:** The previously approved amendment relocated the amenity center from the southern portion of the site to a location nearer the primary project entrance on the northern side of the property. This amendment rotates the amenity center building and pool area within the same general location near the northeast corner of the property.
3. **Amenity Parking:** Revised from the previous amendment to replace on-street parking with a dedicated off-street parking lot serving the amenity center and pool area.
4. **On-street Parking:** Revised to include on-street parking along each side of the roadway, as illustrated in the typical parking section. These spaces are intended to count toward the required parking per the Lee County Land Development Code.

To support the proposed on-street parking configuration, two deviations from the Land Development Code are requested, as detailed in the enclosed Schedule of Deviations with Justifications attachment. All previously approved deviations remain unchanged.

CONSISTENCY WITH APPROVED RESOLUTION

The proposed Administrative Amendment is limited in scope to the revisions described above and is consistent with the intent and development standards approved under the governing resolution.

This amendment does not modify compliance with Lee Plan or LDC, approved development parameters, schedule of uses, property development regulations, compliance with multifamily development standards, Blasingim Road access, or intent to obtain permits from other agencies established by the original rezoning approval.

1412 JACKSON STREET
SUITE #1
FORT MYERS, FL 33901
239.418.0691

EXHIBIT C

ADD2026-00010 Lee County ePlan

CONCLUSION

The proposed amendment refines the most recently approved Master Concept Plan (under ADD2025-00160) by shifting the access back to previously approved conditions (under Res No. Z-22-034), rotating the amenity center, and incorporating parking improvements to satisfy parking requirements in accordance with the LDC, while remaining consistent with the Lee Plan.

HOMES AT 81 WEST RPD

SCHEDULE OF DEVIATIONS AND WRITTEN JUSTIFICATIONS

DEVIATIONS 1 - 6 –NO CHANGES PROPOSED, DEVIATIONS TO REMAIN AS APPROVED IN Z-22-034

DEVIATION 7 – LDC SECTION 34-2015(2)C.

Deviation 7 seeks relief from LDC Section 34-2015(2)C., which requires individual parking spaces to be accessible from a parking aisle intended to provide access to the space, to allow perpendicular on-street parking that will be accessible from the internal roadway network.

JUSTIFICATION FOR DEVIATION

The subject property is intended to be developed with residential units that will include individual garages and driveways accessing the garages. These components of the design meet the Land Development Code's 'Minimum Required Spaces for Single-Use Development'. However, additional parking is required to meet the guest parking requirements per the Land Development Code. On-street parking has been used on similar type projects to provide additional overflow parking spaces for the guests as well as the amenity. Vehicles backing out of parking spaces into the right-of-way do not create any more of a public health, safety, and welfare issue than vehicles backing out of the individual driveways, and the additional spaces will enhance the public health, safety, and welfare by providing places for overflow vehicles to park, keeping the roadways clear for emergency vehicles if needed. On-street parking is permitted on privately maintained roadways at the Director's discretion per LDC 10-296(d)(9)a. but only mentions parallel and angled spaces in (9)d. This deviation requests the use of perpendicular on-street parking which is otherwise compliant with LDC 10-296(d)(9)d. and the dimensional criteria for off-street parking in LDC 34-2016.

DEVIATION 8 – LDC SECTION 34-2013(A)

Deviation 8 seeks relief from LDC Section 34-2013(a) requiring parking lots to be designed to permit vehicles exiting the parking lot to enter the street right-of-way or easement in a forward motion, to allow parking to back out into the right-of-way of the subject development.

JUSTIFICATION FOR DEVIATION

On-street parking has been used on similar type projects to provide additional overflow parking spaces for guests as well as the amenity. Vehicles backing out of parking spaces into the right-of-way do not create any more of a public health, safety, and welfare issue than vehicles backing out of the individual driveways, and the additional spaces will enhance the public health, safety, and welfare by providing places for overflow vehicles to park, keeping the roadways clear for emergency vehicles if needed. On-street parking is permitted on privately maintained roadways at the Director's discretion per LDC 10-296(d)(9)a. but only mentions parallel and angled spaces in (9)d. This deviation requests the use of perpendicular on-street parking which is otherwise compliant with LDC 10-296(d)(9)d. and the dimensional criteria for off-street parking in LDC 34-2016.

1412 JACKSON STREET
SUITE #1
FORT MYERS, FL 33901
239.418.0691

respec.com

RESOLUTION NUMBER Z-22-034

RESOLUTION OF THE BOARD OF COUNTY COMMISSIONERS
OF LEE COUNTY, FLORIDA

WHEREAS, Marshall Property Services, LLC, filed an application on behalf of the property owner, TEG Townhomes on Penzance, LLC, to rezone a 9.97± acre parcel from Agricultural (AG-2) to Residential Planned Development (RPD) in reference to Homes at 81 West RPD; and

WHEREAS, a public hearing before the Lee County Zoning Hearing Examiner, Amanda L. Rivera, was advertised to be heard on September 29, 2022. On September 26, 2022, due to circumstances related to Hurricane Ian, the Hearing Examiner continued the hearing from September 29, 2022. On October 12, 2022, the Hearing Examiner continued the hearing to November 14, 2022. On November 14, 2022, the public hearing was held; and

WHEREAS, the Hearing Examiner gave full consideration to the evidence in the record for Case #DCI2021-00026 and recommended APPROVAL of the Request with conditions; and

WHEREAS, a second public hearing was advertised and held on March 8, 2023, before the Lee County Board of Commissioners; and

WHEREAS, the Lee County Board of Commissioners gave full and complete consideration to the recommendations of the staff, the Hearing Examiner, the documents on record and the testimony of all interested persons; and

WHEREAS, at the second public hearing on March 8, 2023, the Lee County Board of Commissioners remanded the case back to the Hearing Examiner for further consideration; and

WHEREAS, a third public hearing was advertised and held on April 26, 2023, before the Lee County Zoning Hearing Examiner, Amanda L. Rivera, who gave full consideration to the evidence in the record for Case #DCI2021-00026 and recommended APPROVAL of the Request with conditions; and

WHEREAS, a fourth public hearing was advertised and held on August 2, 2023, before the Lee County Board of Commissioners; and

WHEREAS, the Lee County Board of Commissioners gave full and complete consideration to the recommendations of the staff, the Hearing Examiner, the documents on record and the testimony of all interested persons.

NOW, THEREFORE, BE IT RESOLVED BY THE BOARD OF COUNTY COMMISSIONERS:

SECTION A. REQUEST

The applicant filed a request to rezone a 9.97± acre parcel from AG-2 to RPD, to allow development of a maximum of 90 dwelling units.

The property is located in the Central Urban Future Land Use Category and is legally described in attached Exhibit A. The request is APPROVED, SUBJECT TO the conditions and deviations specified in Sections B and C below.

SECTION B. CONDITIONS

All references to uses are as defined or listed in the Lee County Land Development Code (LDC).

1. Master Concept Plan and Development Parameters

Master Concept Plan. Development must be consistent with the two-page Master Concept Plan (MCP) entitled "Homes at 81 West RPD Master Concept Plan" prepared by Grady Minor, revised 4/6/2023, except as modified by the conditions below (Exhibit C).

Compliance with Lee Plan and Land Development Code (LDC). Development must comply with the Lee Plan and LDC, except where deviations have been approved. Subsequent amendments to the MCP, conditions, or deviations may be subject to additional development approvals.

Approved Development Parameters. Development is limited to a maximum of 90 dwelling units, with a maximum permitted building height of 35 feet.

2. Schedule of Uses and Property Development Regulations

a. Schedule of Uses

Accessory Uses, Buildings and Structures
Administrative Offices
Dwelling Unit
- Single-Family Detached
- Duplex
- Multiple-Family

Essential Services
Essential Service Facilities – Group I
Excavation, Water Retention
Fences, Walls
Recreation Facilities
- Personal
- Private–On-site

Signs

b. Property Development Regulations

Minimum Lot Area and Dimensions

Lot Width	N/A
Lot Depth	N/A
Lot Area	N/A

Minimum Setbacks

Internal Drive Aisle*	20 feet
PD Boundary	25 feet
Waterbody	20 feet
Attached Accessory Structure	15 feet
Minimum Building Separation	10 feet

Maximum Building Height	35 feet
Minimum Open Space	40% (10 ac x 0.40 = 4.0± acres)

*As measured from edge of pavement

3. Compliance with Multifamily Development Standards

Development order plans must demonstrate compliance with applicable regulations for multifamily development.

4. Blasingim Road Access

a. Developer must construct one access onto Blasingim Road consistent with LDC § 10-296. The Blasingim Road access must be restricted to emergency use only.

b. Prior to development order approval, developer must:

i. Submit a copy of legal documents creating the legal mechanism to ensure continuous maintenance of Blasingim Road along the property frontage;

ii. Record a notice in the public records to future property owners allowing construction of the project's access. The notice must detail the emergency access plan and provide information as to where a copy of the plan may be obtained from the developer or developer's successor; and

iii. Demonstrate that the emergency only access is equipped with an Emergency Vehicle Access Control (EVAC).

5. Development Permits

Issuance of a County development permit does not establish a right to obtain permits from state or federal agencies. Further, it does not establish liability on the part of the County if the developer: (a) does not obtain requisite approvals or fulfill obligations imposed by state or federal agencies, or (b) undertakes actions that result in a violation of state or federal law. Applicant must obtain applicable state/federal permits prior to commencing development.

SECTION C. DEVIATIONS

1. Access. Deviation (1) seeks relief from LDC § 10-291(3), which requires residential projects of five acres of more to provide more than one means of ingress or egress, to allow one full access via Penzance Boulevard and to allow a second access on Blasingim Road to function as "emergency only."

This deviation is APPROVED SUBJECT TO Condition 4.

2. Buffer. Deviation (2) seeks relief from LDC § 10-416(d)(6), which requires roads, drives, or parking areas associated with a multifamily residential use located less than 125 feet from existing single-family residential lots to be buffered by either:

   a. A solid wall or combination berm and solid wall not less than eight feet in height constructed no more than 25 feet from the abutting property with landscaping between the wall and the abutting property containing a minimum of five trees and 18 shrubs per 100 lineal feet; or

   b. A 30-foot-wide Type F buffer with the hedge planted a minimum of 20 feet from the abutting property.

   This will allow a 48-inch-high hedge, to be maintained at a height of 60 inches, to be installed within a 15-foot-wide buffer easement along the southern boundary of the subject property, except where a proposed street stub out terminates near the southern property boundary. The proposed street stub out area will be buffered with an eight-foot-high solid wall with plantings consisting of hedges and trees located between the proposed wall and south property line as depicted on the MCP.

   This deviation is APPROVED SUBJECT TO the condition that development order plans must depict a 15-foot-wide buffer up to the terminal access stub, which may have a 7.5-foot-wide buffer. Landscape plans must depict ten (10) trees per 100 linear feet and a double hedge row with hedges specified at 48-inches in height to be maintained at 60-inches in height.

3. Turnaround. Deviation (3) seeks relief from LDC § 10-296(k)(1), which requires permanent dead-end streets to be closed at one end by a circular turnaround for vehicles and be constructed in compliance with the LDC, to allow the use of hammerhead turnarounds at the terminal roads depicted on the MCP.

   This deviation is APPROVED.

4. Lake Banks. Deviation (4) seeks relief from LDC § 10-329(d)(4), which requires lake banks to be sloped at a ratio not greater than six horizontal to one vertical (6:1) from the top of bank to a water depth of two feet below the dry season water table, to allow slopes to be designed at a ratio of four horizontal to one vertical (4:1) with enhanced slope protection measures and design techniques determined by the project engineer at time of development order.

   This deviation is APPROVED.

5. Littoral Plantings. Deviation (5) seeks relief from LDC § 10-418(2)(d)3, which allows native wetland trees to be substituted for up to 25 percent of the total number of herbaceous plants required within planted littoral shelves, at a rate of one tree (minimum ten-foot height; 2 inch caliper, with a four-foot spread) per 100 herbaceous plants, to allow wetland trees to be substituted for 100 percent of the total required number of herbaceous plants.

   This deviation is APPROVED SUBJECT TO the condition that landscape plants must be in compliance with the Lee County Port Authority Non-Compatible and Compatible Plant List.

6. Penzance Boulevard Access. Deviation (6) seeks relief from LDC § 10-285, which prohibits lots in urban areas with access alternatives from having direct motor vehicle access to an arterial or major collector road, to allow a full access point on Penzance Boulevard as shown on the MCP.

   This deviation is APPROVED SUBJECT TO Condition 4.

SECTION D. EXHIBITS

The following exhibits are attached to this resolution and incorporated by reference:

Exhibit A: Legal description of the property
Exhibit B: Zoning Map (with the subject parcel indicated)
Exhibit C: The Master Concept Plan

SECTION E. FINDINGS AND CONCLUSIONS

Based upon its review, the Board of County Commissioners adopts the recommendation of the Hearing Examiner, including the following findings and conclusions:

1. The requested rezoning to RPD complies with the Lee Plan. Lee Plan Goals 2, 4, 5, 61, 77, 135; Objectives 1.5, 2.1, 2.2, 4.1, 5.1, 77.1, 77.3, 126.2; Policies 2.1.2, 2.2.1, 5.1.1, 5.1.2, 5.1.7, 135.1.9, 135.9.5, 135.9.6; Lee Plan Maps 1-A, 1-B.

2. As conditioned, the Homes at 81 West RPD:

   a. Meets the LDC and other County regulations or qualifies for deviations. LDC §§ 34-145(d), 34-341, 34-378, 34-411, 34-413, 34-491, 34-612(2), 34-932;

   b. Is compatible with existing and planned uses. Lee Plan Objectives 2.1, 2.2, Policies 5.1.5, 135.9.5, 135.9.6; LDC § 34-411;

   c. Provides access sufficient to support the proposed development intensity. Expected impacts to transportation facilities will be addressed by the conditions of approval and County regulations. Lee Plan Policies 39.1.1; LDC §§ 2-261 *et seq.*, 10-287, 34-411(d);

   d. Will not adversely affect environmentally critical/sensitive areas and natural resources. Lee Plan Goals 77, 125; Objectives 77.1, 77.3, 126.2; Policies 61.3.1, 61.3.6, 61.3.11, 126.2.1, Standard 4.1.4; and LDC § 34-411(h).

   e. Will be served by urban services adequate to serve the proposed land use. Lee Plan Glossary, Lee Plan Goals 2, 4, Objectives 2.1, 2.2, 4.1, and Standards 4.1.1 and 4.1.2; LDC § 34-411(d).

3. The proposed mix of uses is appropriate at the proposed location. Lee Plan Goals 2, 5; Policies 2.1.1, 2.2.2, 5.1.2, 5.1.3, 5.1.5, 135.1.9.

4. The recommended conditions and applicable regulations provide sufficient safeguards to protect the public interest. Lee Plan Policies: 5.1.5, 5.1.6, 126.2.1 and 135.9.6; LDC § 34-411.

ADD2026-00010 Lee County ePlan

5. The recommended conditions are reasonably related to the impacts expected from the proposed development. Lee Plan Policies 5.1.5, 135.9.6; LDC § 34-932.

6. The requested deviations, as conditioned:

   a. Enhance the objectives of the planned development; and

   b. Preserve and promote protection of public health, safety, and welfare.

SECTION F. SCRIVENER'S ERRORS

The Board intends that this resolution can be renumbered or relettered and typographical errors that do not affect the intent and are consistent with the Board's action can be corrected with the authorization of the County Manager or his designee, without the need for a public hearing.

Commissioner Pendergrass made a motion to adopt the foregoing resolution, seconded by Commissioner Sandelli. The vote was as follows:

Adopted by unanimous consent.

Kevin Ruane	Aye
Cecil L Pendergrass	Aye
Raymond Sandelli	Aye
Brian Hamman	Aye
Mike Greenwell	Aye

DULY PASSED AND ADOPTED this 2nd day of August 2023.

ATTEST:
KEVIN C. KARNES, CLERK

BY: _____
Deputy Clerk

BOARD OF COUNTY COMMISSIONERS
OF LEE COUNTY, FLORIDA

BY: _____
Brian Hamman, Chair

APPROVED AS TO FORM FOR THE
RELIANCE OF LEE COUNTY ONLY

_____
Joseph A. Adams
Assistant County Attorney
County Attorney's Office

2023 AUG -9 PM 4:07

RECEIVED
MINUTES OFFICE

ADD2026-00010 Lee County ePlan
DCI2021-00026 Lee County ePlan

PROPERTY DESCRIPTION

THE SOUTHEAST 1/4 OF THE SOUTHWEST 1/4 OF THE SOUTHWEST 1/4 OF SECTION 8, TOWNSHIP 45 SOUTH, RANGE 25 EAST, LEE COUNTY, FLORIDA, BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

COMMENCE AT THE SOUTH QUARTER CORNER OF SECTION 8, TOWNSHIP 45 SOUTH RANGE 25 EAST, LEE COUNTY, FLORIDA; THENCE ALONG THE SOUTH LINE OF THE SOUTHWEST QUARTER OF SAID SECTION, SOUTH 88°54'17" WEST, A DISTANCE OF 1,316.24 FEET TO THE POINT OF BEGINNING OF THE PARCEL OF LAND HEREIN DESCRIBED;

THENCE CONTINUE ALONG SAID SOUTH LINE, SOUTH 88°54'17" WEST, A DISTANCE OF 658.60 FEET; THENCE NORTH 01°19'45" WEST, A DISTANCE OF 659.94 FEET; THENCE NORTH 88°51'34" EAST, A DISTANCE OF 656.81 FEET; THENCE SOUTH 01°29'04" EAST, A DISTANCE OF 660.47 FEET TO THE POINT OF BEGINNING.

CONTAINING 9.97 ACRES, MORE OR LESS.

NOTES:

1. BEARINGS SHOWN HEREON ARE BASED ON THE STATE PLANE COORDINATE SYSTEM ESTABLISHED BY THE NATIONAL GEODETIC SURVEY FOR FLORIDA WEST ZONE, 1983 DATUM WITH 2011 ADJUSTMENT OBTAINED UTILIZING RTK GPS OBSERVATIONS ON THE FDOT NETWORK AND REFER TO THE SOUTH LINE OF THE SOUTHWEST QUARTER OF SECTION 8, TOWNSHIP 45 SOUTH, RANGE 25 EAST, LEE COUNTY, FLORIDA AS BEING S 88°54'17" W.

2. DIMENSIONS SHOWN HEREON ARE IN U.S. SURVEY FEET AND DECIMALS THEREOF.

3. THIS SKETCH AND DESCRIPTION IS NOT VALID WITHOUT THE ORIGINAL SIGNATURE AND SEAL OR THE DIGITAL SIGNATURE AND DIGITAL SEAL OF A LICENSED FLORIDA SURVEYOR AND MAPPER. NO ADDITIONS OR DELETIONS TO THIS SKETCH AND DESCRIPTION ARE PERMITTED WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE SIGNING PARTY.

REVIEWED
DCI2021-00026
Rick Burris, Principal
Planner
Lee County DCD/Planning
7/11/2022

DRAWN BY:	KJG
CHECKED BY:	DLS
JOB CODE:	CMPB
SCALE:	1" = 120'
DATE:	5/18/2021
FILE:	20-218-S&L
SHEET:	1 of 2

NOT COMPLETE WITHOUT SHEETS 1 AND 2 OF 2

NOT A SURVEY

GradyMinor
Civil Engineers • Land Surveyors • Planners • Landscape Architects
Cert. of Auth. EB 0005151 Cert. of Auth. LB 0005151 Business LC 26000266
Bonita Springs: 239.947.1144 www.GradyMinor.com Fort Myers: 239.690.4380
Q. Grady Minor and Associates, P.A.
3800 Via Del Rey
Bonita Springs, Florida 34134

SKETCH AND DESCRIPTION

PARCEL OF LAND

LYING IN
SECTION 8, TOWNSHIP 45 SOUTH, RANGE 25 EAST
LEE COUNTY, FLORIDA


DATE SIGNED
Digitally signed by Donald L. Saintenoy III, PSM
Date: 2021.05.24 08:07:00 -04'00'

DONALD L. SAINTENOY III, P.S.M
FL LICENSE #6761
FOR THE FIRM

G:\SURVEY\PROJECT SURVEY 2020\218 - PENZANCE BLVD DO (CMPB)\SURVEY\SKETCH & LEGALS\20-218-S&L.DWG

EXHIBIT A

ADD2026-00010 Lee County ePlan
DCI2021-00026 Lee County ePlan

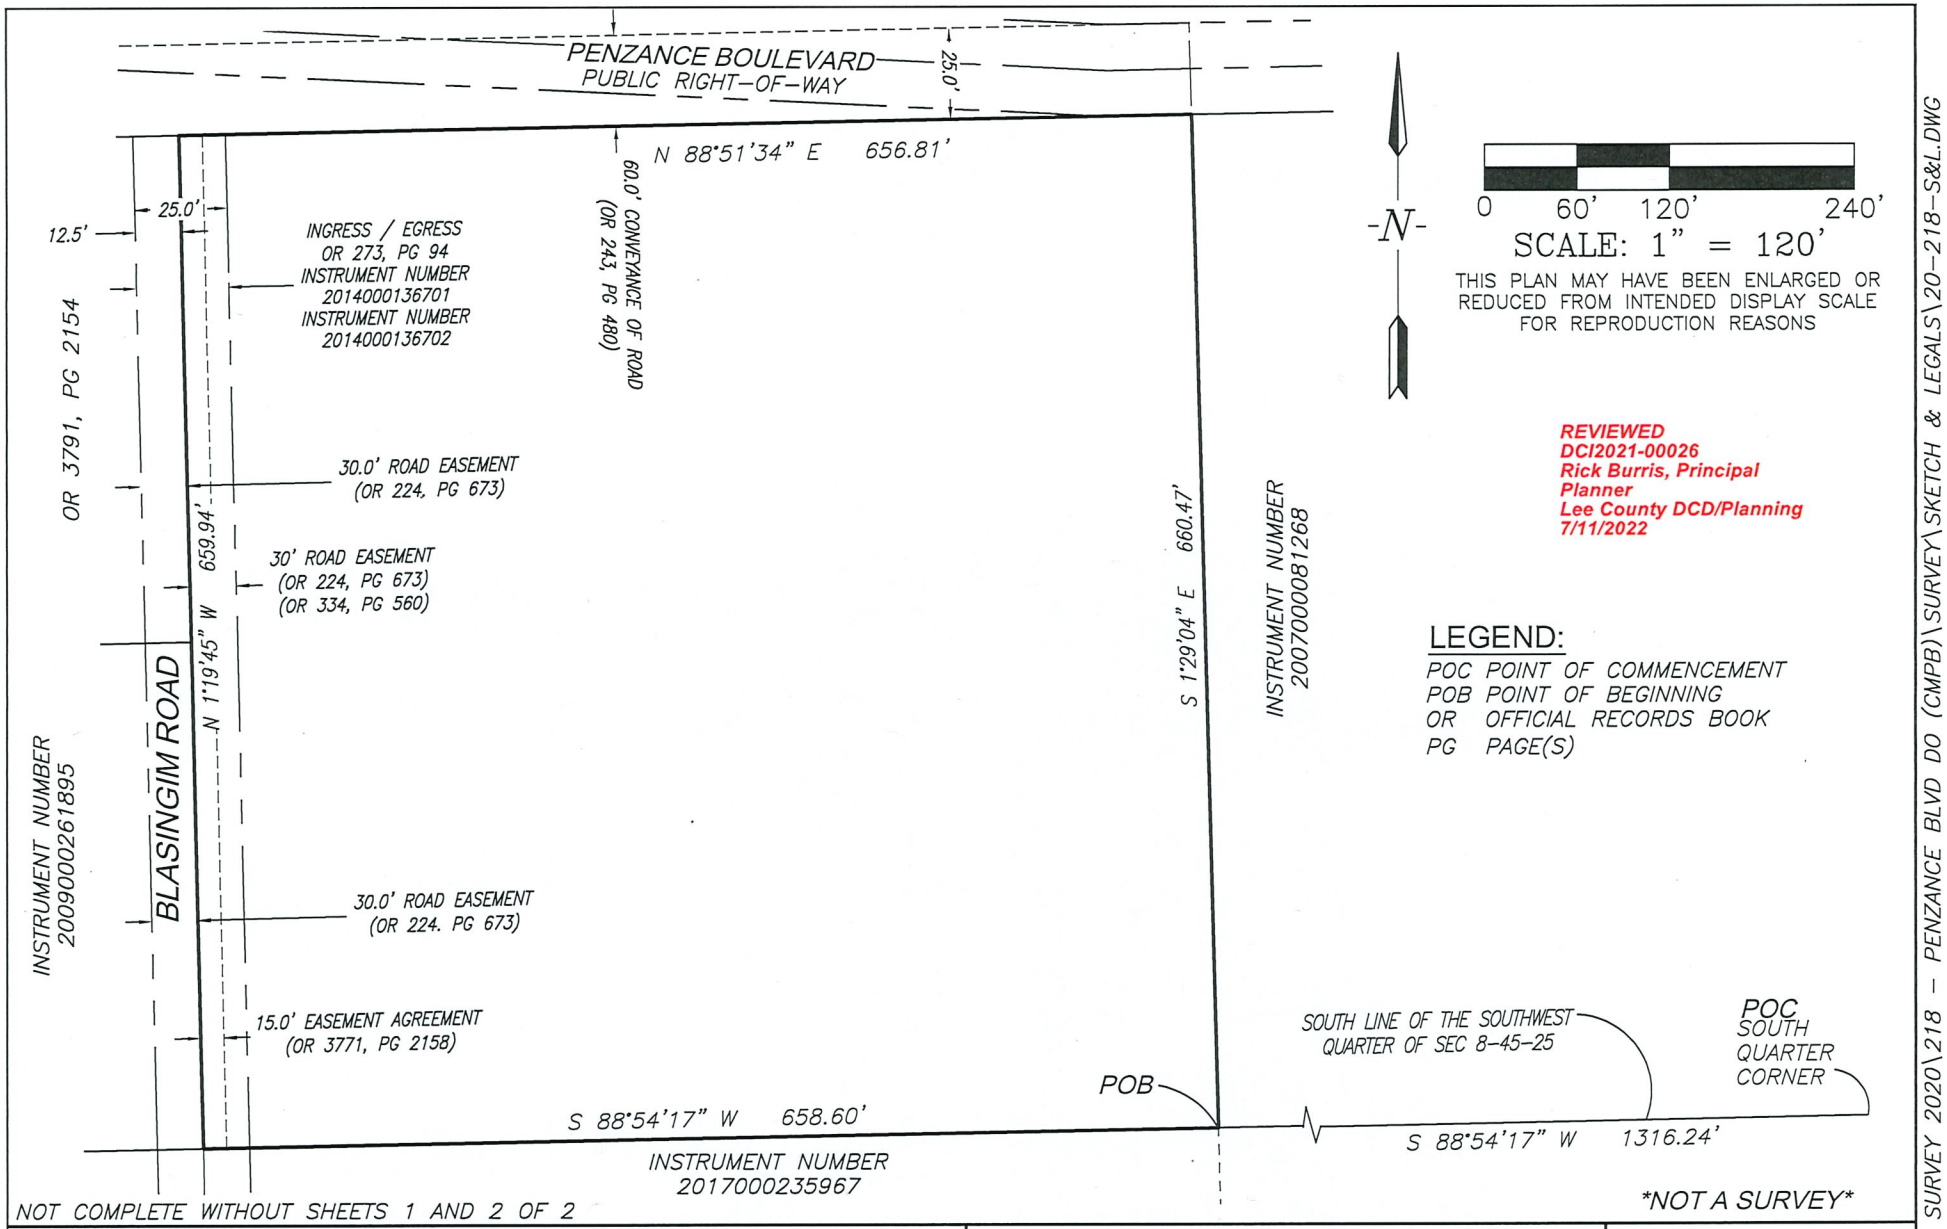

REVIEWED
DCI2021-00026
Rick Burris, Principal Planner
Lee County DCD/Planning
7/11/2022

LEGEND:

POC POINT OF COMMENCEMENT
POB POINT OF BEGINNING
OR OFFICIAL RECORDS BOOK
PG PAGE(S)

NOT A SURVEY

NOT COMPLETE WITHOUT SHEETS 1 AND 2 OF 2

G:\SURVEY\PROJECT SURVEY 2020\218 - PENZANCE BLVD DO (CMPB)\SURVEY\SKETCH & LEGALS\20-218-S&L.DWG

GradyMinor
Civil Engineers • Land Surveyors • Planners • Landscape Architects
Cert. of Auth. EB 0005151 Cert. of Auth. LB 0005151 Business LC 26000266
Bonita Springs: 239.947.1144 www.GradyMinor.com Fort Myers: 239.690.4380


Q. Grady Minor and Associates, P.A.
3800 Via Del Rey
Bonita Springs, Florida 34134

SKETCH AND DESCRIPTION

PARCEL OF LAND

LYING IN
SECTION 8, TOWNSHIP 45 SOUTH, RANGE 25 EAST
LEE COUNTY, FLORIDA

DRAWN BY:	KJG
CHECKED BY:	DLS
JOB CODE:	CMPB
SCALE:	1" = 120'
DATE:	5/18/2021
FILE:	20-218-S&L
SHEET:	2 of 2

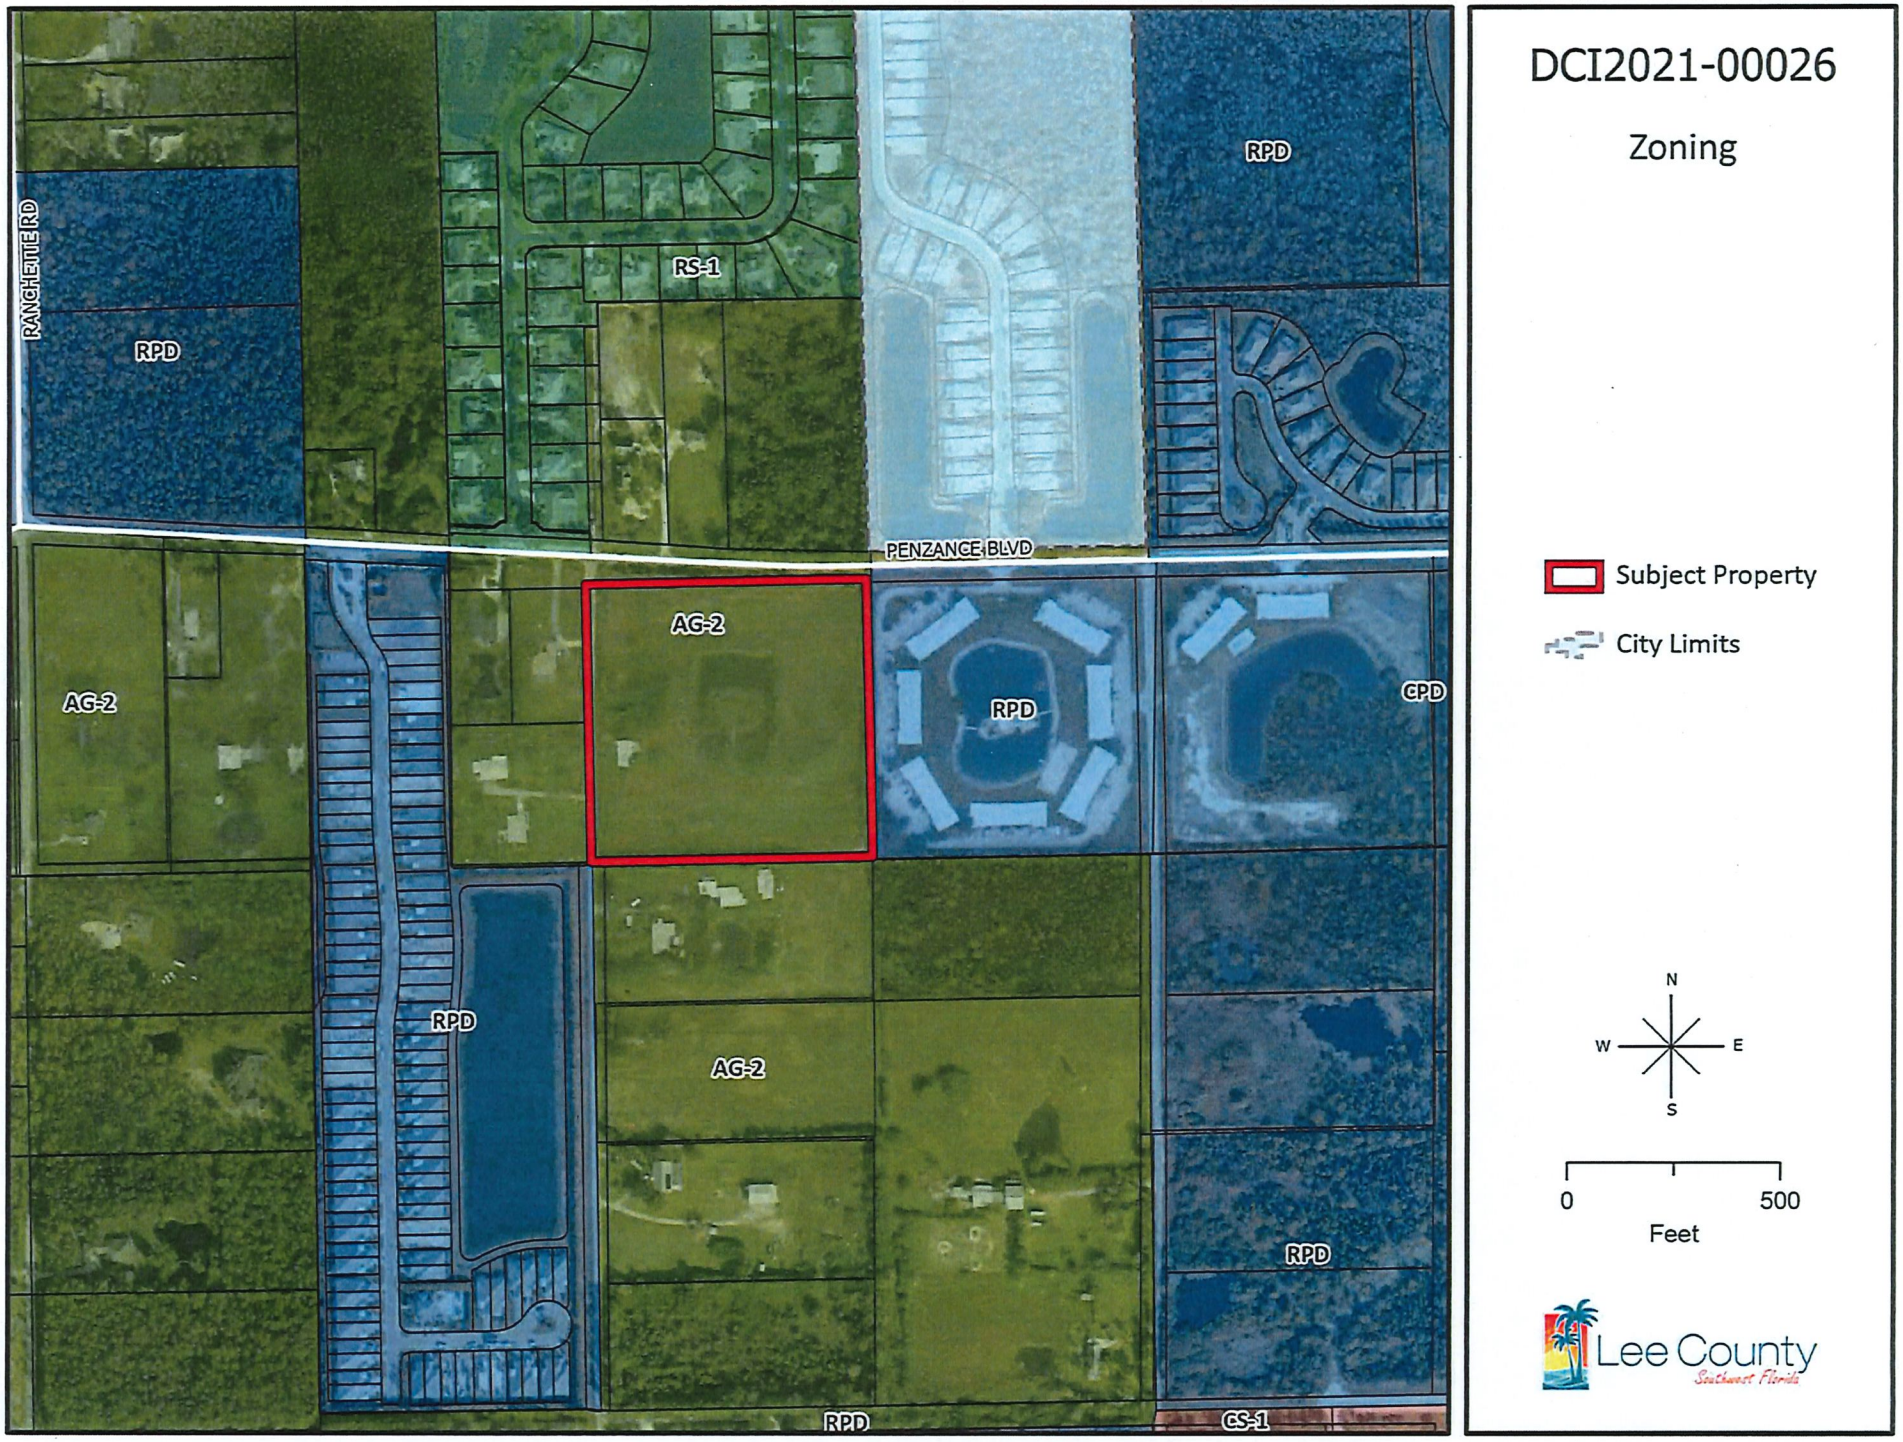

DCI2021-00026

Zoning

Subject Property

City Limits


N
W
E
S

0 500

Feet

Lee County
Southwest Florida

EXHIBIT B

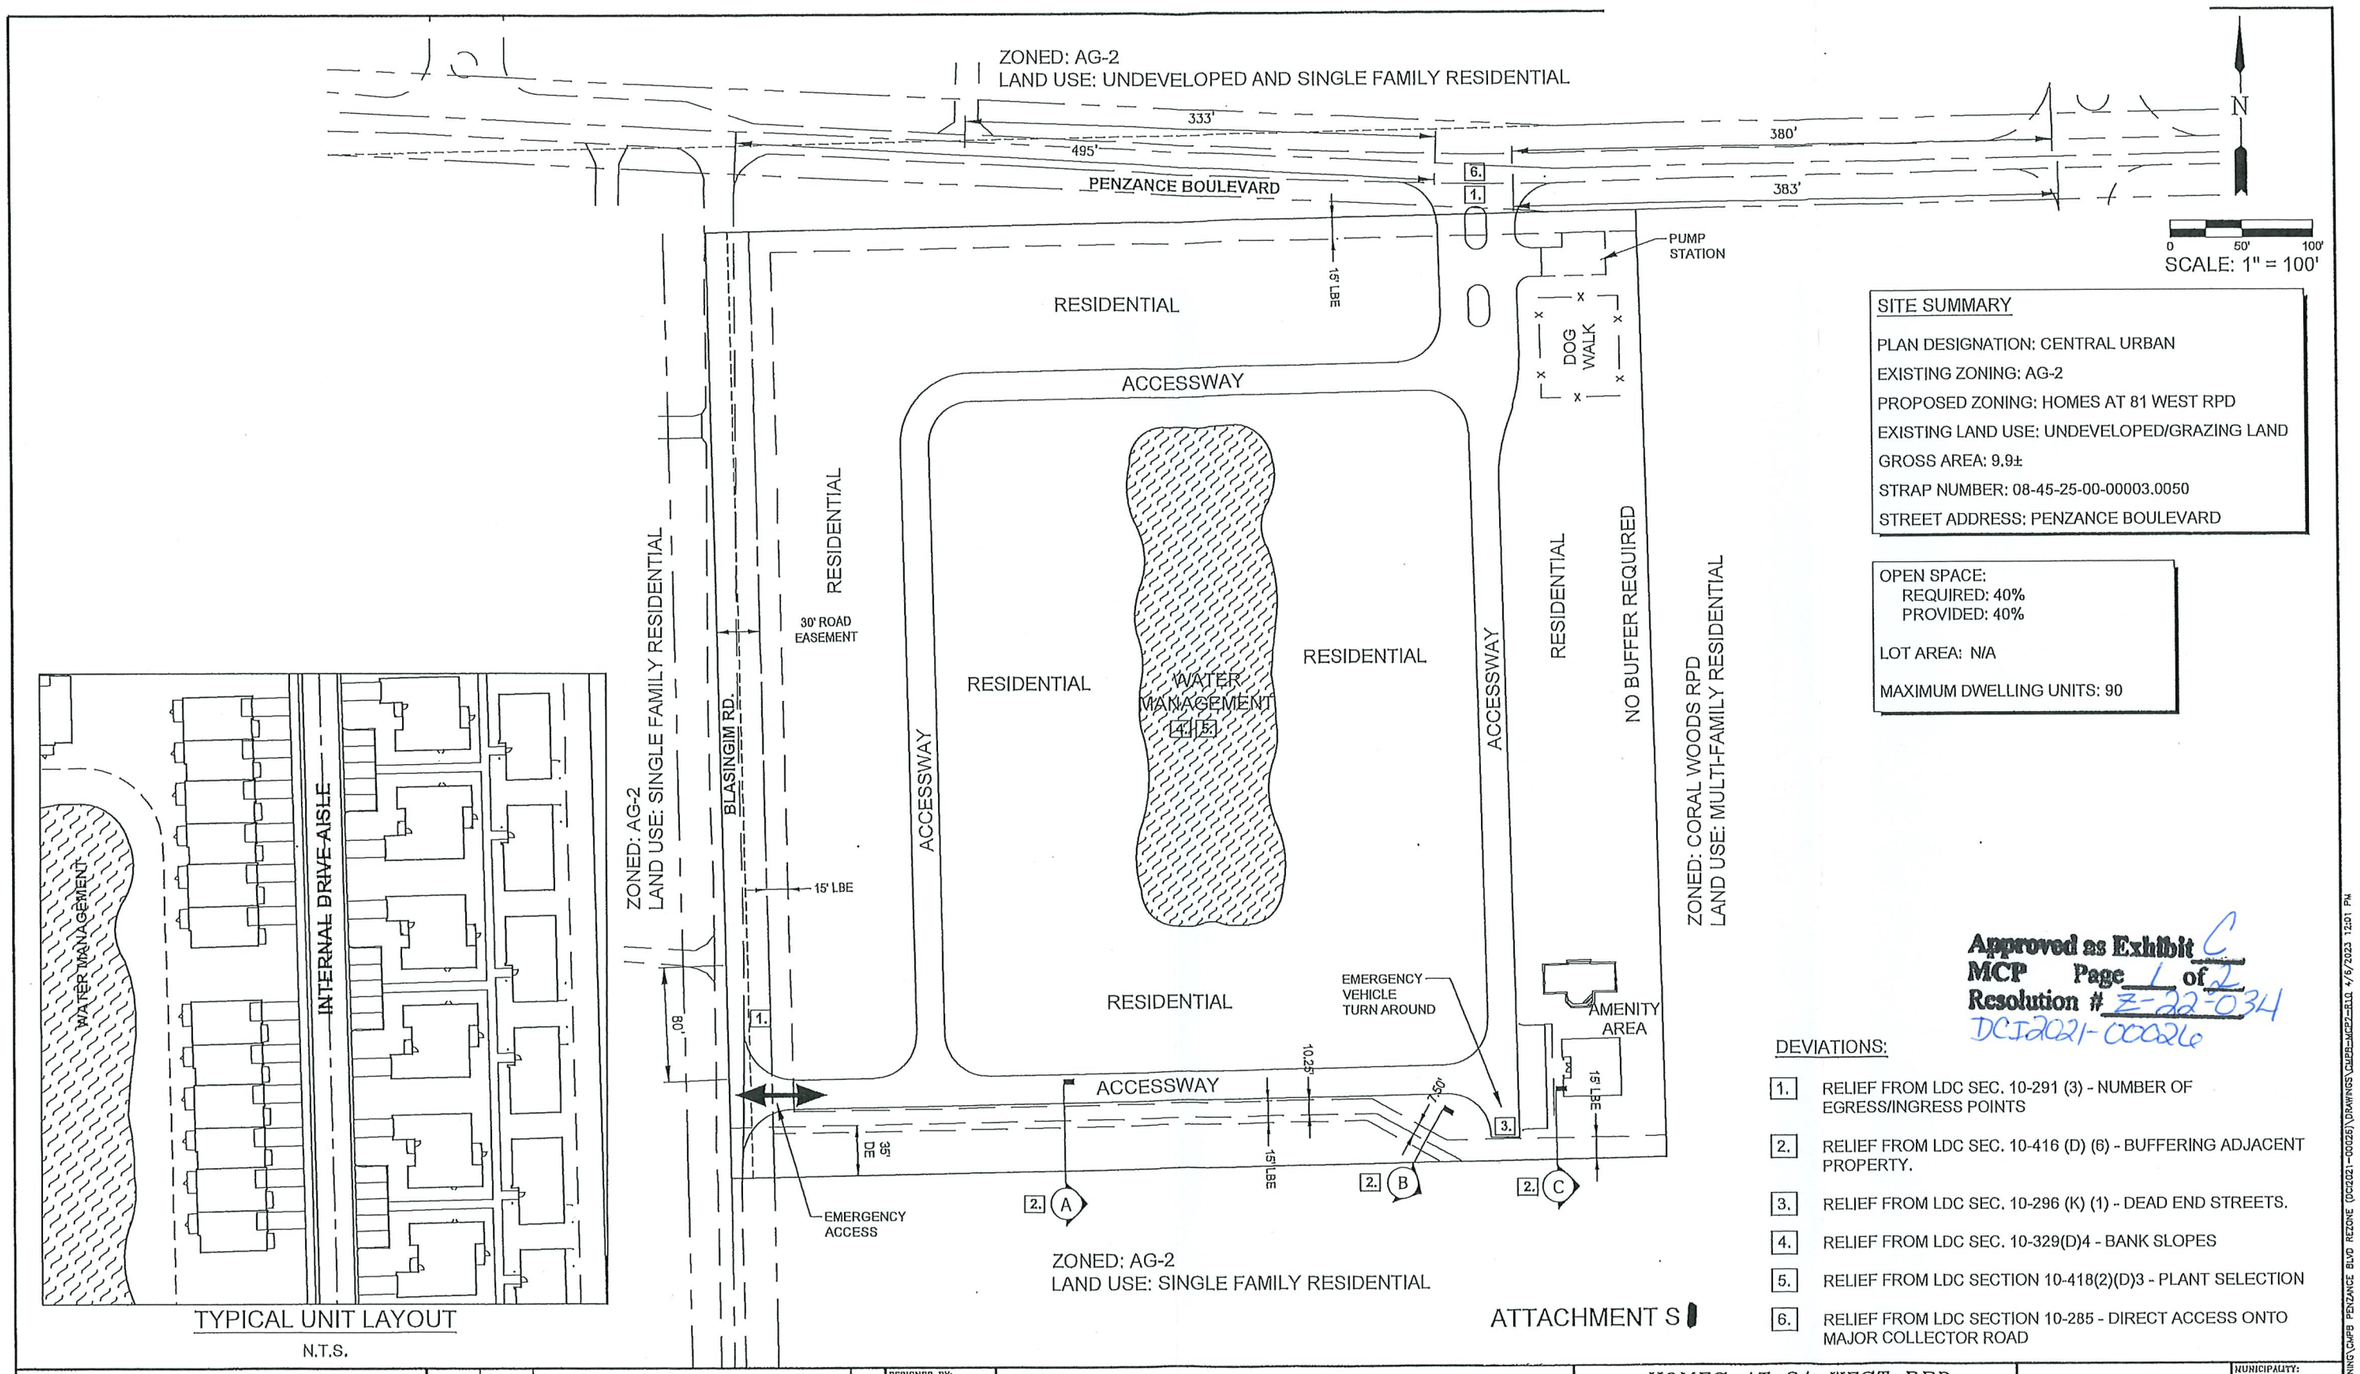

TYPICAL UNIT LAYOUT
N.T.S.

SITE SUMMARY

PLAN DESIGNATION: CENTRAL URBAN
EXISTING ZONING: AG-2
PROPOSED ZONING: HOMES AT 81 WEST RPD
EXISTING LAND USE: UNDEVELOPED/GRAZING LAND
GROSS AREA: 9.9±
STRAP NUMBER: 08-45-25-00-00003.0050
STREET ADDRESS: PENZANCE BOULEVARD

OPEN SPACE:
REQUIRED: 40%
PROVIDED: 40%

LOT AREA: N/A

MAXIMUM DWELLING UNITS: 90

Approved as Exhibit C
MCP Page 1 of 2
Resolution # Z-22-034
DCI2021-000026

DEVIATIONS:

1. RELIEF FROM LDC SEC. 10-291 (3) - NUMBER OF EGRESS/INGRESS POINTS
2. RELIEF FROM LDC SEC. 10-416 (D) (6) - BUFFERING ADJACENT PROPERTY.
3. RELIEF FROM LDC SEC. 10-296 (K) (1) - DEAD END STREETS.
4. RELIEF FROM LDC SEC. 10-329(D)4 - BANK SLOPES
5. RELIEF FROM LDC SECTION 10-418(2)(D)3 - PLANT SELECTION
6. RELIEF FROM LDC SECTION 10-285 - DIRECT ACCESS ONTO MAJOR COLLECTOR ROAD

ATTACHMENT S

LEGEND

Revision	Date	Description	By

DESIGNED BY: F.J.F.
DRAWN BY: C.G.K.
APPROVED: D.W.A.
JOB CODE: CMPB
SCALE: 1" = 100'


GradyMinor
Civil Engineers • Land Surveyors • Planners • Landscape Architects
Cert. of Auth. EB 0005151 Cert. of Auth. LB 0005151 Business LC 26000266
Bonita Springs: 239.947.1144 www.GradyMinor.com Fort Myers: 239.690.4380
Q. Grady Minor and Associates, P.A.
3800 Via Del Rey
Bonita Springs, Florida 34134

HOMES AT 81 WEST RPD
MASTER CONCEPT PLAN
REVISED 4/6/2023


MUNICIPALITY: LEE COUNTY
SEC/TWN/RGE: 8/45S/25E
DATE: FEBRUARY 2021
SUBMITTAL TYPE: REZONE
SHEET 1 OF 2

G:\PLANNING\PROJ - PLANNING\CMPB PENZANCE BLVD REZONE (DCI2021-00026)\DRAWINGS\CMPB\CMP2-ELU1 4/6/2023 12:01 PM


ADD2026-00010 Lee County ePlan

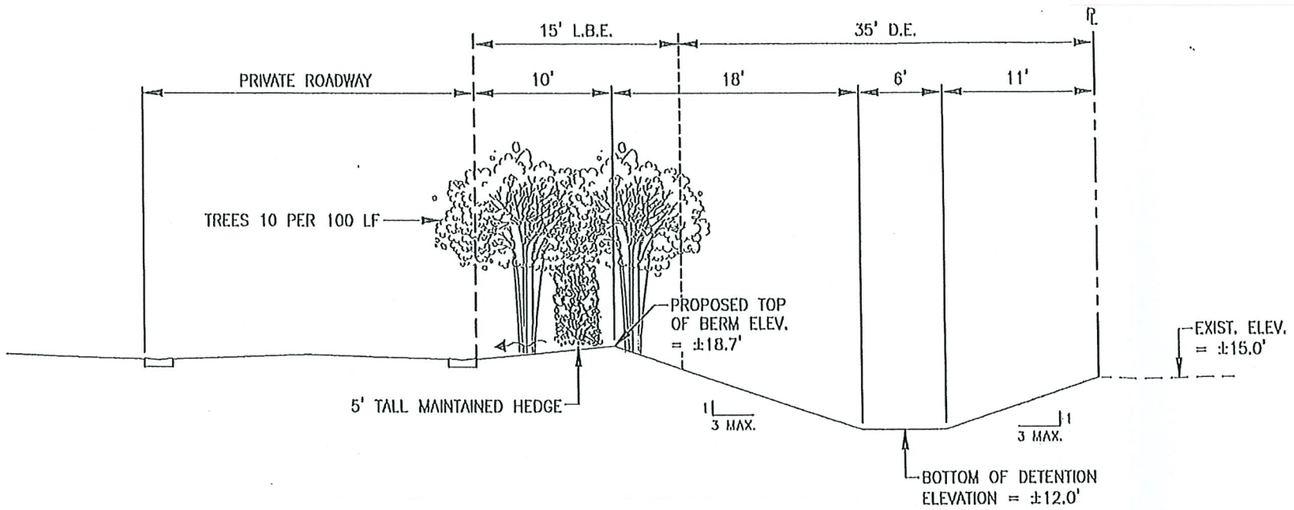

CROSS SECTION A
N.T.S.

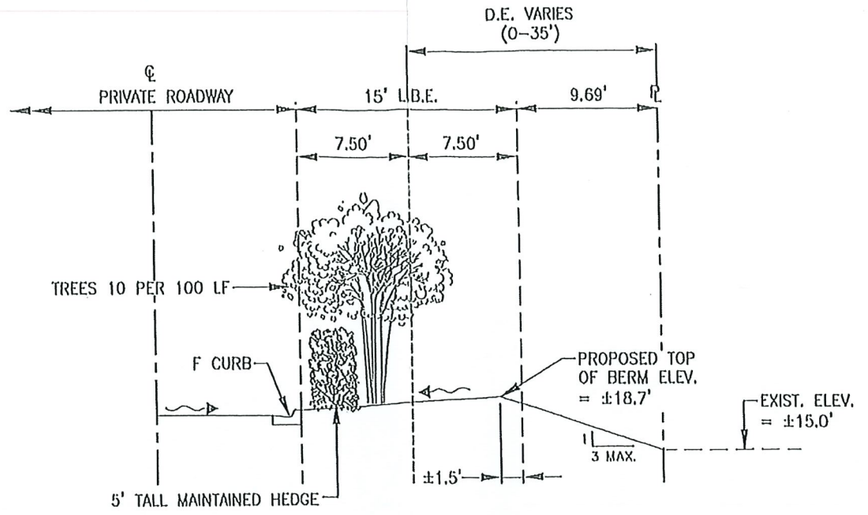

CROSS SECTION B
N.T.S.

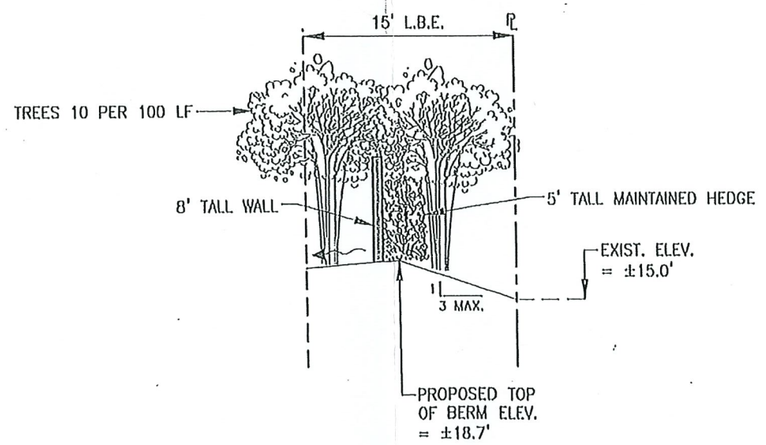

CROSS SECTION C
N.T.S.

Approved as Exhibit C
MCP Page 2 of 2
Resolution # Z-22-034
DCI2021-00026

LEGEND

Revision	Date	Description	By

DESIGNED BY: F.J.F.
DRAWN BY: C.G.K.
APPROVED: D.W.A.
JOB CODE: CVPB
SCALE: AS NOTED

GradyMinor
Civil Engineers • Land Surveyors • Planners • Landscape Architects
Cert. of Auth. EB 0003151 Cert. of Auth. LB 0003151 Business LC 26000260
Bonita Springs: 239.947.1144 www.GradyMinor.com Fort Myers: 239.690.4380

Q. Grady Minor and Associates, P.A.
3800 Via Del Rey
Bonita Springs, Florida 34134

HOMES AT 81 WEST RPD

DEVIATION #2
CROSS SECTIONS

MUNICIPALITY: LEE COUNTY
SEC/TWN/RGE: 8/45S/25E
DATE: FEBRUARY 2021
SUBMITTAL TYPE: REZONE
SHEET 2 OF 2

G:\PLANNING\PROJ - PLANNING\CVPB PENZANCE BLVD REZONE (00220)-00026)\DRAWINGS\CROSSSECTIONS 9/13/2022 2:10 PM